
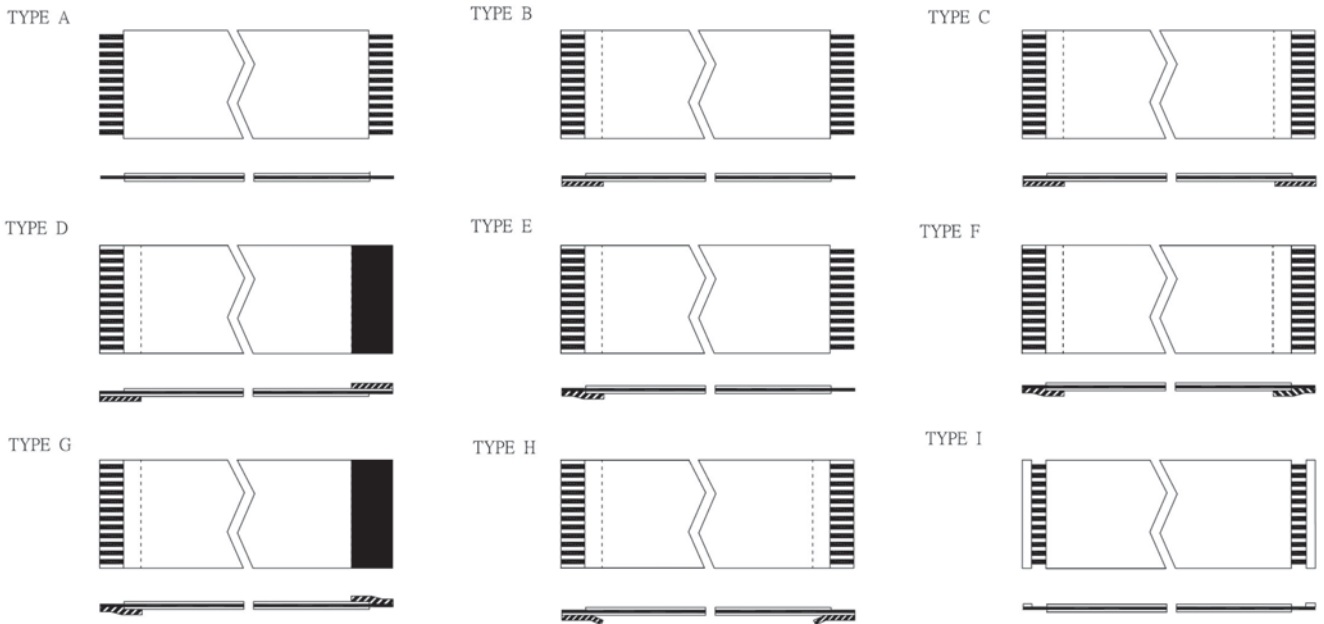


FLEXIBLE FLAT CABLE UL APPROVED

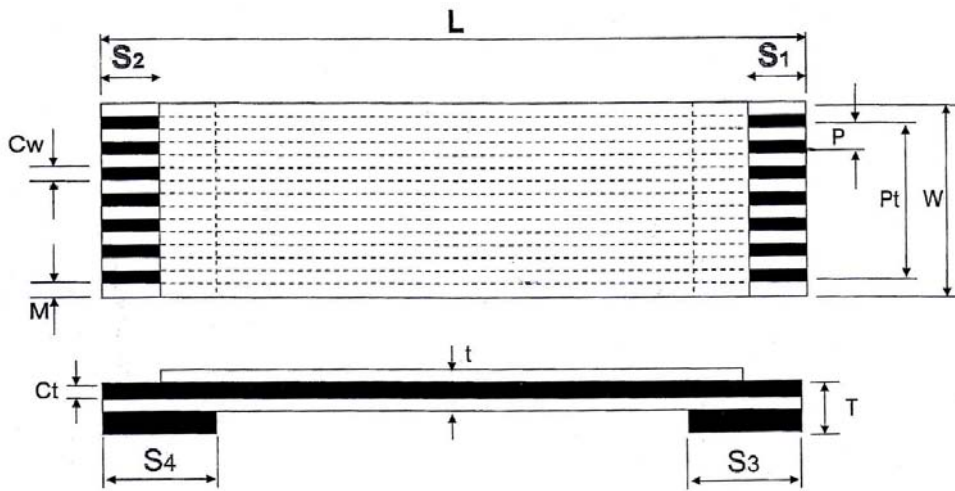

ORDERING INFORMATION:

CODE: F F C $\frac{1}{1}$ $\frac{00}{2}$ C $\frac{16}{3}$ - $\frac{100}{4}$ ($\frac{S1/S2}{5}$ / $\frac{S3/S4}{6}$) $\frac{xxx}{7}$

PLEASE GIVE US A CODE, THEN WE WILL GIVE YOU

P/N K $\frac{xxx}{YY}$ $\frac{xxx}{MM}$ $\frac{xxx}{DD}$ - $\frac{xxx}{4}$ M M

1. CABLE PITCH:

- "050" 0.50MM ($C_w = 0.3MM$)
- "100" 1.00MM ($C_w = 0.6MM$)
- "125" 1.25MM ($C_w = 0.7MM$)
- "254" 2.54MM ($C_w = 1.27MM$)

2. CONSTRUCTION TYPE:

A, B, C, D, E, F, G, H, I

3. NO. OF CONDUCTORS:

03~80

4. TOTAL CABLE LENGTH L (UNIT: mm)

050, 100, 200, ...etc.

5. STRIP LENGTH S1/S2 (UNIT: mm)

3, 4, 5, 6, 8

6. SUPPORT TAPE LENGTH S3/S4 (UNIT: mm)

6, 8, 10, 12, 16

7. CONDUCTOR THICKNESS (UNIT: mm)

"050" FLEXIBLE $C_t = 0.05MM$

"035" SUPER FLEXIBLE $C_t = 0.035MM$

"100" LOW FLEXIBLE $C_t = 0.10MM$

NOTE: S3/S4 are usually longer than S1/S2.