

## MODULAR PLUGS 15P WITH LINER FOR CAR TELECOMMUNICATION (UNSHIELDED)




### SPECIFICATIONS

**Voltage Rating:** 250 volts AC, at 2 amps.  
**Dielectric Withstanding Voltage:** 1000 volts AC.  
**Insulation Resistance:** 500 megaohms.  
**Termination Resistance:** 20 milliohms min.  
**Durability:** 2000 Cycles  
**Temp. Rating:** -40°C to +120°C  
 Available for 24 or 26 AWG wire.



### MATERIALS

**Body:** PC. UL94V-2, clean  
**Contact:** phosphor bronze, underplated 100 microinch Nickel and selective gold in contact region, and gold flash on remainder of terminal.  
**All materials must be RoHS compliant.**  
**Unit:** mm

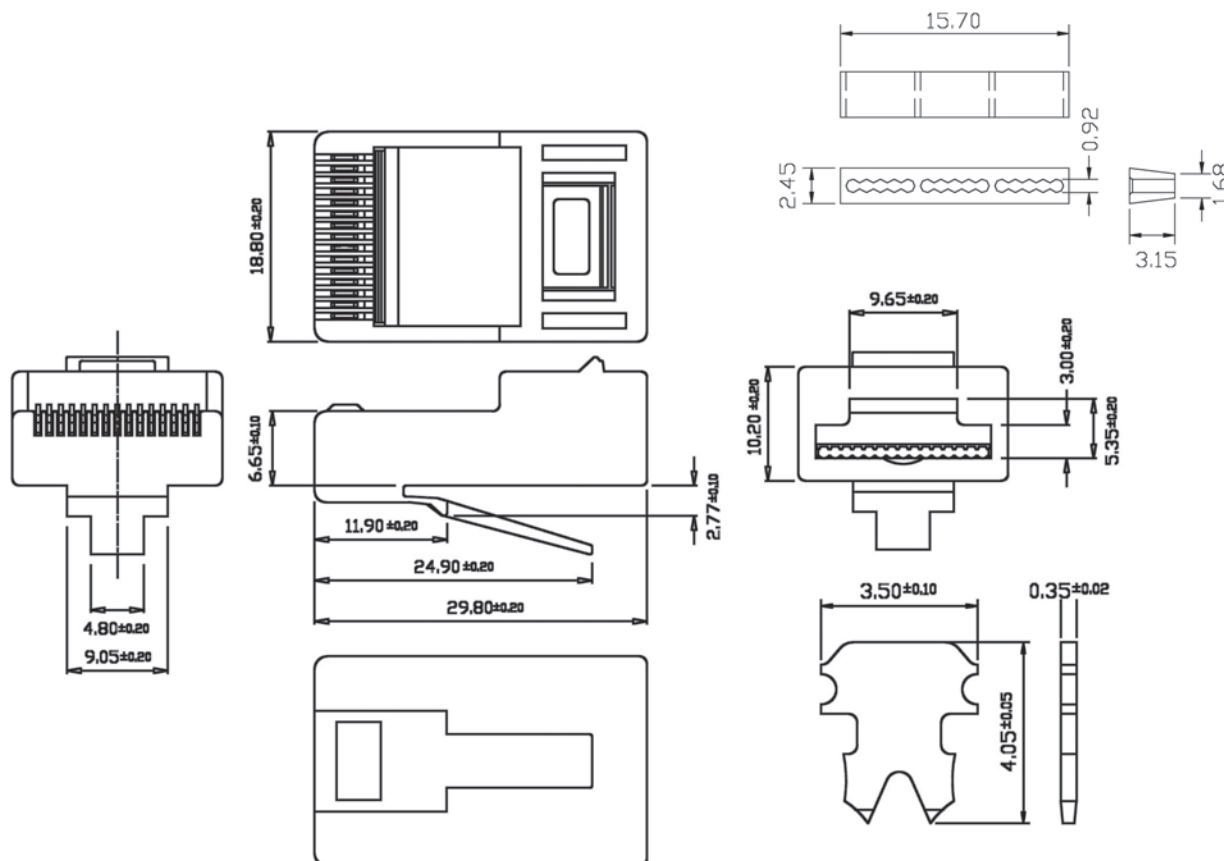

### ORDERING INFORMATION:

**P/N M P A T -  $\frac{15}{1} H \frac{x}{2} \frac{x}{3}$**

1. NO. OF POSITIONS & CONTACTS:  
"15" 15P15C
2. CONTACT FINISH:  
"01" FLASH GOLD PLATED  
"06" 6 MICROINCH GOLD  
"15" 15 MICROINCH GOLD  
"30" 30 MICROINCH GOLD  
"50" 50 MICROINCH GOLD
3. CONTACT TYPE:  
"A" 2 PRONGS FOR STRANDED WIRE

NOTE: MATES WITH MODULAR JACK P/N MJAT-15xBx