

## Retaining springs for transistors

art. no.	for transistor-housing	suitable for heatsinks	plate thickness [mm]	material		
<b>THF 126 11</b>	TO 126	-	2	stainless steel		
<b>THF 126 12</b>	TO 126	-	2	stainless steel		
<b>THF 129 TO 220</b>	TO 220	FK 219/ FK 222/ SK 129	1-2	stainless steel		
<b>THF 220</b>	TO 220	FK 219/ FK 222	1-2	stainless steel		
<b>THF 220 15</b>	TO 220	-	1.5-2.0	stainless steel		
<b>THF 249</b>	TO 220	FK 249	1.0-1.5	spring steel, corrosion protected		
<b>THF 409 TO 220</b>	TO 220/ TO 247/ TO 248/ TO 3 P	SK 409	1.5-3.0	stainless steel		
<b>THF 409 220 2</b>	TO 218/ TO 220/ TO 247/ TO 248/ TO 3 P	SK 145/ SK 185/ SK 437	4	stainless steel		
<b>THF 409 SOT 32</b>	TO 126/ SOT 32/ SOT 82	SK 409	2-3	stainless steel		
<b>THF 220 17</b>	TO 218/ TO 220/ TO 247/ TO 248/ TO 3 P	-	1.0-1.5	stainless steel		
<b>THF 409 220 1</b>	TO 218/ TO 220/ TO 247/ TO 248/ TO 3 P	SK 409/ SK 459	2-3	stainless steel		
<b>THF 247</b>	TO 220/ TO 247/ TO 248/ TO 3 P	SK 484	2	stainless steel		
<b>THF 247 15</b>	TO 247/ TO 248/ TO 3 P	SK 460	4	stainless steel		
<b>THF 247 11</b>	-	-	1.5	stainless steel		



**EL.ITALIA**

www.elitaliaweb.it  
info@elitaliaweb.it  
+39 0233611626

**Retaining springs for transistors**

art. no.	for transistor-housing	suitable for heatsinks	plate thickness [mm]	material	
<b>THF 247 14</b>	TO 247/ TO 248/ TO 3 P	SK 484	2	stainless steel	
<b>THF 247 4</b>	TO 218/ TO 220/ TO 247/ TO 248/ TO 3 P	SK 460	4	stainless steel	
<b>THF 220 35</b>	2 x TO 220	-	1.0-1.5	stainless steel	
<b>THF 126 37</b>	TO 126	-	4	stainless steel	
<b>THF 600</b>	TO 218/ TO 220/ TO 247/ TO 3 P	SK 600	2.5	spring steel, corrosion protected	
<b>THF 104</b>	TO 220/ TO 247/ TO 248/ TO 3 P	SK 104	1-2	stainless steel	



## Retaining springs for transistors

- universal **retaining spring** for transistor housings types TO 218, TO 220, TO 247, TO 264, SOT 32 and various SIP Multiwatt etc.
- fast and easy mounting of the transistors
- number of retaining spring elements can be chosen (**n = max. 10**)
- **THFMG** with thread M 4
- specific versions and modifications on customer's request

art. no.	for transistor-housing	spring force [N]	material	
<b>THFM ...</b>	TO 218/ TO 220/ TO 247/ TO 264/ SOT 32/ SIP Multiwatt	$55 \pm 5$	stainless steel	
<b>THFMG ...</b>	TO 218/ TO 220/ TO 247/ TO 264/ SOT 32/ SIP Multiwatt	$55 \pm 5$	stainless steel	
<b>THFM 11 ...</b>	TO 220	$45 \pm 5$	stainless steel	
<b>THFM 20 ...</b>	TO 247/ TO 264	$70 \pm 5$	stainless steel	
<b>please indicate:</b> ... number of retaining-spring elements <b>1 - 10</b>				



**EL.ITALIA**

www.elitaliaweb.it  
 info@elitaliaweb.it  
 +39 0233611626

**A 144**

**A**

**B**

**C**

**D**

**E**

**F**

**G**

**H**

**K**

**L**

**M**

**N**

**Retaining springs for transistors**

A

B

C

D

E

F

G

H


I

K

L

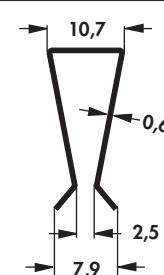
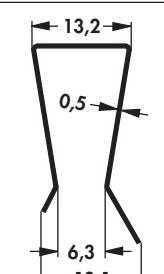
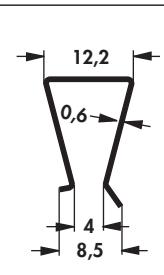
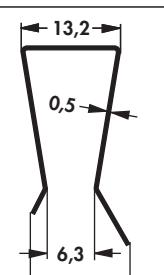
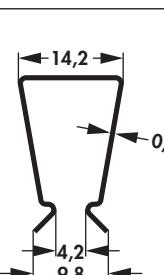
M

N

art. no.	for transistor-housing	spring force [N]	material	
<b>THFK 220</b>	TO 220	79	spring steel, corrosion protected	            <img alt="Technical drawing of TO 220 transistor housing with retaining spring installed" data-bbox="

## Retaining springs for transistors

- able to slide on the transistor and mounting plate
- easy mounting
- high pressure force and firm grip
- specific versions upon customer's request

art. no.	for transistor-housing	plate thickness [mm]	holding force [N]	material		
<b>THFA 1</b>	TO 220	2	20	stainless steel		 10,7 0,6 2,5 7,9
<b>THFA 2</b>	TO 220	6,5	20	spring steel, corrosion protected		 13,2 0,5 6,3 13,1
<b>THFA 3</b>	TO 220	5,5	33	spring steel, corrosion protected		 12,2 0,6 4 8,5
<b>THFA 4</b>	TO 218/ TO 247	6,5	59	spring steel, corrosion protected		 13,2 0,5 6,3 13,1
<b>THFA 5</b>	TO 220/ TO 3 P	5	13	stainless steel		 14,2 0,5 4,2 9,8

A

B

C

D

E

F

G

H

K

L

M

N


**EL.ITALIA**

www.elitaliaweb.it  
 info@elitaliaweb.it  
 +39 0233611626

## Retaining springs for transistors

A

B

C

D

E

F

G

H

I

K

L

M

N

art. no.	for transistor-housing	plate thick-ness [mm]	hold-ing force [N]	material		
<b>THFA 6</b>	TO 220/ TO 3 P	3	28	spring steel, corrosion protected		
<b>THFA 7</b>	TO 220/ TO 3 P	3	50	spring steel, corrosion protected		
<b>THFA 8</b>	TO 220/ TO 3 P	3	55	spring steel, corrosion protected		
<b>THFA 9</b>	TO 220/ TO 3 P	1	20	stainless steel		
<b>THFA 10</b>	TO 220/ TO 3 P	4	32	spring steel, corrosion protected		

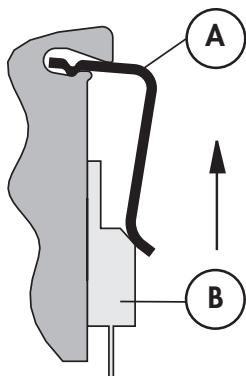


## Retaining springs for transistors

- universal lock-in retaining spring for types TO 218, TO 220, TO 247, TO 264 and various SIP-Multiwatt etc. transistor housings
- clip fastening also for power transistors without holes, MAX types etc.
- easy assembly and secure hold when using a special groove geometry in heatsinks, housing parts etc.
- optimal heat transfer between component and cooling element
- various spring clip shapes available for fastening the components (see sketch)
- the indicated spring forces THFU 1-7 refer to a transistor thickness of 4.5 mm (TO 220)
- the range of suitable heat sinks is continuously extended
- versions specifically designed to meet customers requirements on request

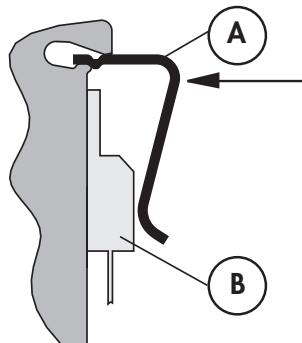
### Installation

#### THFU 1

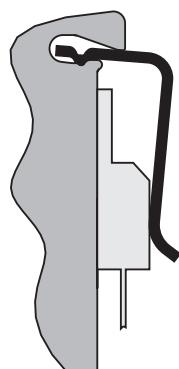


- insert the lock-in retaining spring for transistors THFU 1 (A) into the groove of the profile
- push transistor (B) below the springinu

#### THFU 2, THFU 3, THFU 4, THFU 5, THFU 6, THFU 7



- place transistor (B) onto the mounting area
- press the lock-in retaining spring for transistors THFU 2 - 7 (A) into the groove of the profile (a suitable installation aid will facilitate pressing in)



- Once in place, the spring will keep its position and fix the transistor with a high contact pressure on the installation surface (the spring remains in its position and it can neither be moved in a lengthwise direction nor fall it can out of the groove in a cross direction).

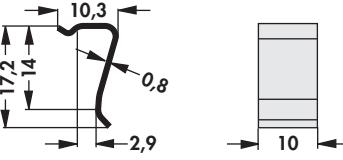
material:	stainless steel
material thickness:	0.8 mm



EL.ITALIA

www.elitaliaweb.it  
info@elitaliaweb.it  
+39 0233611626

## Lock-in retaining spring for transistors

art. no.	for transistor-housing	suitable for heatsinks	spring force [N]	material	
<b>THFU 1</b>		SK 480/ SK 481/ SK 482/ SK 483/ SK 487/ SK 489/ SK 490/ SK 492/ SK 495/ SK 499/ SK 512/ SK 514/ SK 573/ SK 574/ SK 575/ TO 218/ TO 220/ TO 247/ TO 262/ TO 3 P/ SOT 199/ SOT 429	60 $\pm 5$	stainless steel	 



## Lock-in retaining spring for transistors

art. no.	for transistor-housing	suitable for heatsinks	spring force [N]	material	
<b>THFU 2</b>	SK 480/ SK 481/ SK 482/ SK 483/ SK 487/ SK 489/ SK 490/ SK 492/ SK 495/ SK 499/ SK 512/ SK 514/ SK 573/ SK 574/ SK 575/ TO 218/ TO 220/ TO 247/ TO 262/ TO 3 P/ SOT 199/ SOT 429	SK 480/ SK 481/ SK 482/ SK 483/ SK 487/ SK 489/ SK 490/ SK 492/ SK 495/ SK 499/ SK 512/ SK 514/ SK 573/ SK 574/ SK 575/ TO 218/ TO 220/ TO 247/ TO 262/ TO 3 P/ SOT 199/ SOT 429	60 $\pm$ 5	stainless steel	

A

B

C

D

E

F

G

H

I

K

L

M



N


**EL.ITALIA**

www.elitaliaweb.it  
info@elitaliaweb.it  
+39 0233611626

**A 150**

**Lock-in retaining spring for transistors**

art. no.	for transistor-housing	suitable for heatsinks	spring force [N]	material	
<b>THFU 3</b>		SK 480/ SK 481/ SK 482/ SK 483/ SK 487/ SK 489/ SK 490/ SK 492/ SK 495/ SK 499/ SK 514/ SK 573/ SK 574/ SK 575/ SK 576/ TO 218/ TO 220/ TO 247/ TO 262/ TO 3 P/ SOT 199/ SOT 429	50 ±5	stainless steel	 



## Lock-in retaining spring for transistors

art. no.	for transistor-housing	suitable for heatsinks	spring force [N]	material		
<b>THFU 4</b>		SK 480/ SK 481/ SK 482/ SK 483/ SK 487/ SK 489/ SK 490/ SK 495/ SK 499/ SK 514/ TO 218/ TO 202/ TO 220/ TO 248/ TO 262/ TO 264/ TO 3 P/ SOT 199				
<b>THFU 5</b>	TO 218/ TO 202/ TO 220/ TO 247/ TO 248/ TO 262/ TO 264/ TO 3 P/ SOT 199/ SOT 429	SK 490/ SK 589/ SK 617/ SK 639/ SK 662/ SK 664/ SK 665/ SK 669/ SK 681/ LAM 5 K/ LAM 5 D K/ LAM 6 K/ LA 27 K	$32 \pm 5$	stainless steel		



**EL.ITALIA**

www.elitaliaweb.it  
info@elitaliaweb.it  
+39 0233611626

**A 152**

**A**

**B**

**C**

**D**

**E**

**F**

**G**

**H**

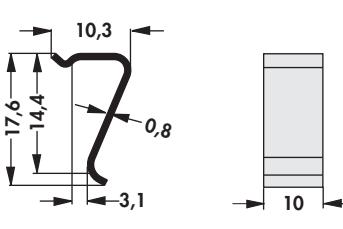
**K**

**L**

**M**

**N**

## Lock-in retaining spring for transistors

art. no.	for transistor-housing	suitable for heatsinks	spring force [N]	material	
<b>THFU 6</b>		SK 480/ SK 481/ SK 482/ SK 483/ SK 487/ SK 489/ SK 490/ SK 492/ SK 495/ SK 499/ SK 512/ SK 514/ SK 573/ SK 574/ TO 126/ TO 218/ TO 220/ TO 225/ TO 247/ TO 248/ TO 251/ TO 3 P/ SOT 32			 
<b>THFU 7</b>	eSIP	SK 480/ SK 482/ SK 483/ SK 487/ SK 490/ SK 492/ SK 495/ SK 573/ SK 574/ SK 576/ SK 637/ SK 638/ SK 681/ LAM 3 K/ LAM 3 D K/ LAM 4 K/ LAM 4 D K/ LAM 5 K/ LAM 5 D K/ LAM 6 K/ LA 27 K	65 ±5	stainless steel	 