



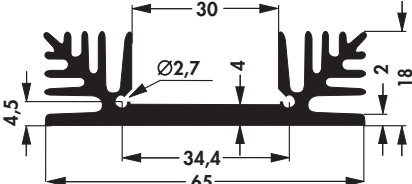



Extruded heatsinks for PCB mounting

- for semiconductor clip-mounting
- profile **SK 185** → A 94
- special lengths and drillings on request
- **L** = solderable pins

				
art. no.	l [mm]	R _{th} [K/W]	Ø	version
SK 185 25 STC TO 220	25.0	7.9	TO 220	with solder pins
SK 185 37,5 STC TO 220	37.5	6.4		
SK 185 50 STC TO 220	50.0	4.9		without solder pins
SK 185 50 C TO 220				
surface:		black anodised		

- for semiconductor screw-mounting
- profile **SK 185** → A 94
- special lengths and drillings on request
- **L** = solderable pins

				
art. no.	l [mm]	R _{th} [K/W]	Ø	version
SK 185 25 STS TO 220	25.0	7.9	TO 220	with solder pins
SK 185 37,5 STS TO 220	37.5	6.4		
SK 185 50 STS TO 220	50.0	4.9		without solder pins
SK 185 25 TO 220	25.0	7.9		
SK 185 37,5 TO 220	37.5	6.4		
SK 185 50 TO 220	50.0	4.9		
surface:		black anodised		