

Solenoid Valve

Quick Search Table

Contacts	3+PE	2+2PE	2+PE	3P	4P	3+PE	2+2PE	2+PE	3P	4P	2+PE	3+PE	2+2PE	2+PE	3P	4P	2+PE	2+2PE	3+PE
Rated Current	8A / 10A					16A					8A / 10A		16A		6A				
Rated Voltage	24V / 250V					400V					24V / 250V		250V		250V				
Rated Impulse Voltage	800V / 4000V					4000V					800V / 4000V		4000V		800V				
Wire Gauge / size	Max. 1.5mm ²					-					Max. 1.5mm ²		-		Max. 0.5mm ²				
Pin layout																			

Solenoid Valve Plugs

Molded Cable



	Type A Female					Type A Male					Type B		Type C Female					Type C Male		
Female Molded Cable Type A	434	434	434	434	434	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Female Molded Cable Type B	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Female Molded Cable Type C	-	-	-	-	-	-	-	-	-	-	-	-	436	436	436	436	436	-	-	-

Assembly Type




Female Field Wirable Assembly Type A PG9/PG11	437	437	437	437	437	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Female Field Wirable Assembly Type A with LED	438	438	438	438	438	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Female Field Wirable Assembly Type B	-	-	-	-	-	-	-	-	-	-	-	439	-	-	-	-	-	-	-
Female Field Wirable Assembly Type C	-	-	-	-	-	-	-	-	-	-	-	-	440	440	440	440	440	-	-
Male Base Conn Type A Circular	-	-	-	-	-	441	441	441	441	441	-	-	-	-	-	-	-	-	-
Male Base Conn Type A Circular with Hexagonal Nut	-	-	-	-	-	442	442	442	442	442	-	-	-	-	-	-	-	-	-
Male Base Conn Type A Rectangular	-	-	-	-	-	443	443	443	443	443	-	-	-	-	-	-	-	-	-
Male Base Conn Type B Rectangular	-	-	-	-	-	-	-	-	-	-	444	-	-	-	-	-	-	-	-
Male Base Conn Type C Rectangular	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	445	445

How to Order Part Number


Valve / Solenoid Connectors With Cable Molded

VC A F M 00 22 - 05 CB 75

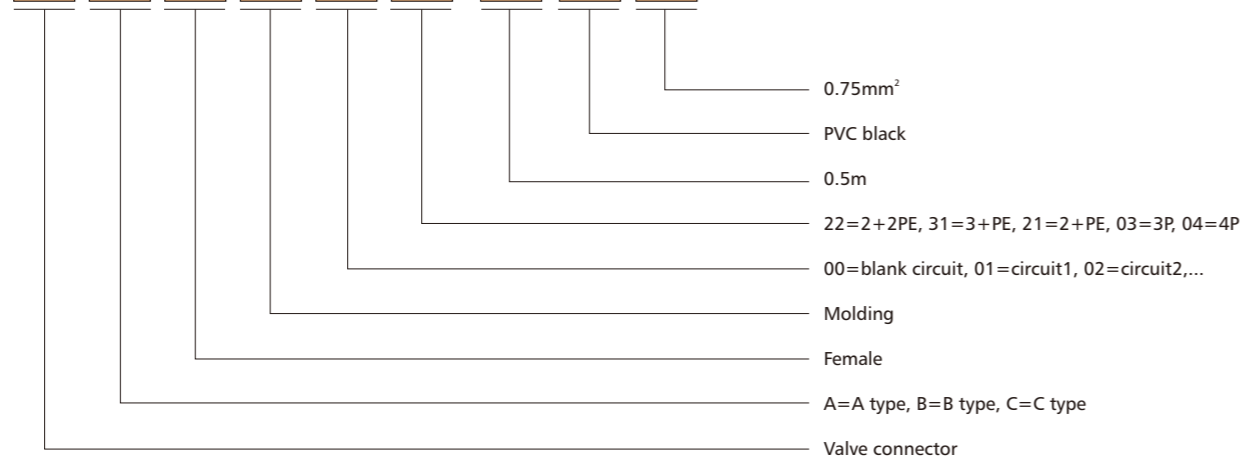

Valve / Solenoid Connectors With Assembly

VC A F A 00 31 - 1

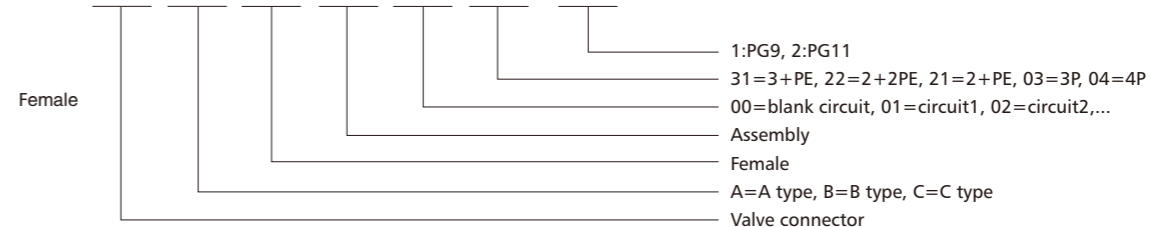

VC A M A 01 31 - 0

