






SMTS-202 ON-ON
DPDT 6P

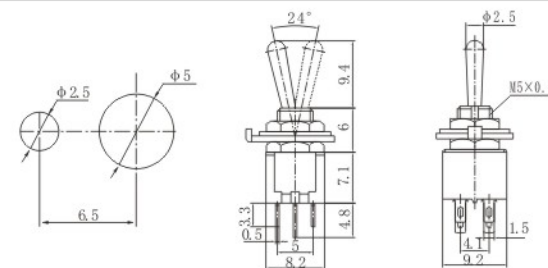


SMTS-102-A2 ON-ON
SPDT 3P

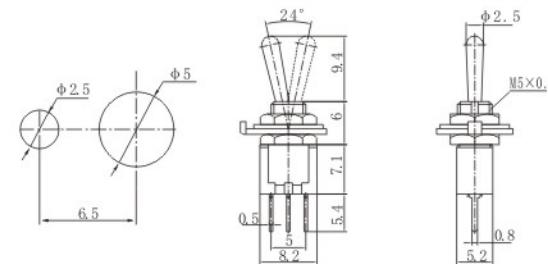


SMTS-202-A2 ON-ON
DPDT 6P

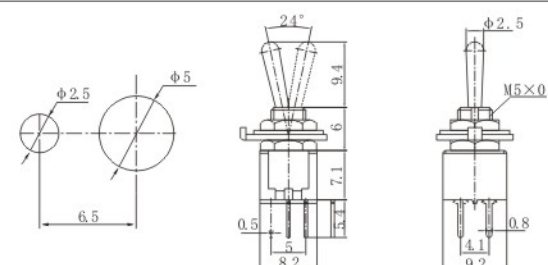


SMTS-103-2A1 ON-OFF-ON
SPDT 3P

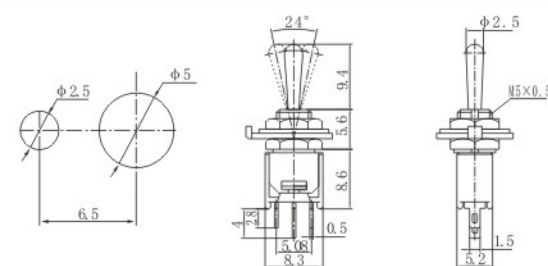

SMTS-203-2A1 ON-OFF-ON
DPDT 6P

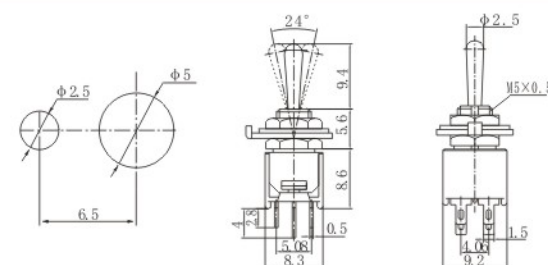

SMTS-102-2C3 ON-ON
SMTS-103-2C3 ON-OFF-ON
SPDT 3P

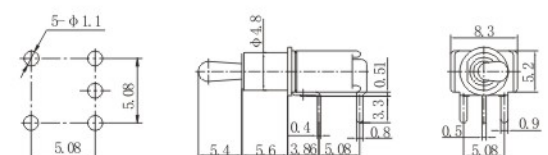

小型钮子开关 Miniature Toggle Switch

技术特性 Specifications

- 规格 Rating: 6A 125VAC; 3A 250VAC
- 接触电阻 Contact Resistance: 20mΩ max
- 绝缘电阻 Insulation Resistance: 500VDC 1000MΩ min
- 耐电压 Dielectric Strength: 1500VAC, 1 Minute
- 操作温度 Operating Temperature: -25℃~ +85℃
- 电气寿命 Electrical Life: ≥10,000 Cycles

选型说明 How to order

MTS - 1 02 - A 1 T - R

特征 Features: MTS Mini Toggle, RLS Rocker Version

刀数 Poles: 1 1 pole, 2 2 pole, 3 3 pole, 4 4 pole

电路特性 Switch Function: 01 ON-OFF, 02 ON-ON, 11 OFF-(ON), 12 ON-(ON)(单复位), 03 ON-OFF-ON, 13 ON-OFF-(ON)(单复位), 23 (ON)-OFF-(ON)(双复位)

手柄种类 Actuator: () Means Momentary

端子种类 Terminal options: Solder terminal (1), PC terminal (2), PC-H terminal (3), PC-V terminal (4), Long Solder terminal (5)

支架 Bracket: 标准 (A), 长型 (B), 短型 (C), 带柄套 (D), 大型 (G), 特大型 (L)

底座颜色 Housing color: R 红色 Red, B 蓝色 Blue

铭牌 Nameplate: 防水帽 Water proof cap, WPC-05


塑料扁柄 (E), 金属扁柄 (F), 长金属扁柄 (FL)

RLS: (A) (C) (D) (E) (F)


外形尺寸 Dimension



MTS-101 ON-OFF
MTS-111 OFF-(ON)
SPST 2P

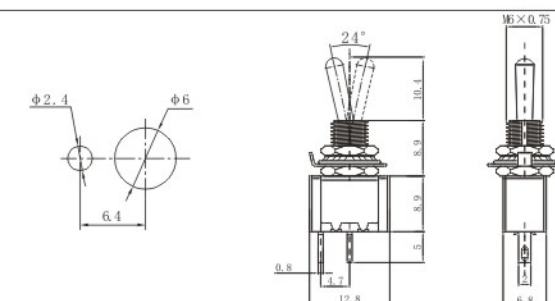


MTS-102 ON-ON
MTS-103 ON-OFF-ON
MTS-112 ON-(ON)
MTS-113 ON-OFF-(ON)
MTS-123 (ON)-OFF-(ON)
SPDT 3P

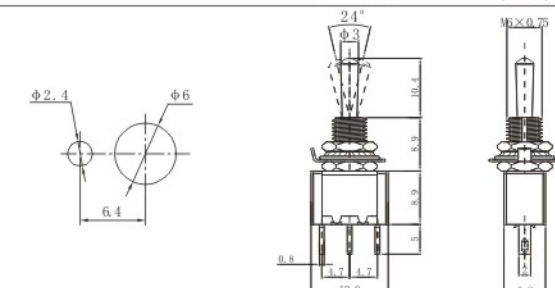





MTS-201 ON-OFF
MTS-211 OFF-(ON)
DPST 4P

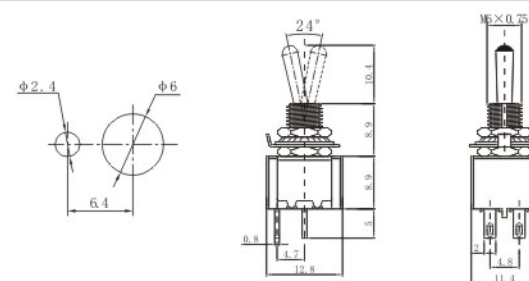


MTS-202 ON-ON
MTS-203 ON-OFF-ON
MTS-212 ON-(ON)
MTS-213 ON-OFF-(ON)
MTS-223 (ON)-OFF-(ON)
DPDT 6P
MTS-2033 ON-ON-ON DP3T

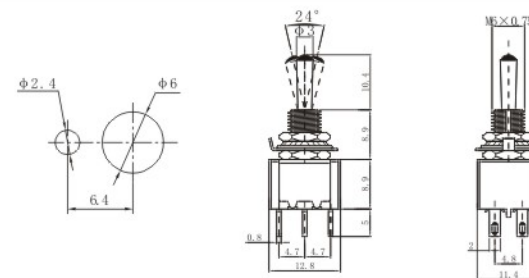


MTS-302 ON-ON
MTS-303 ON-OFF-ON
3PDT 9P

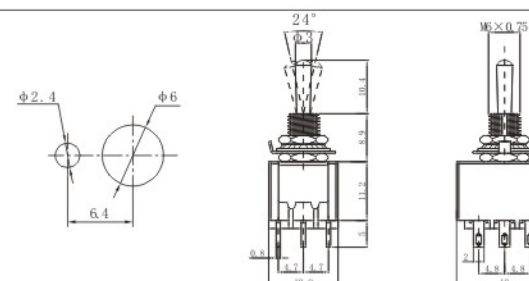


MTS-402 ON-ON
MTS-403 ON-OFF-ON
4PDT 12P

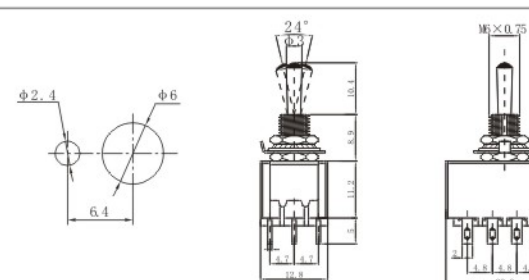


MTS-101-A2 ON-OFF
MTS-111-A2 OFF-(ON)
SPST 2P

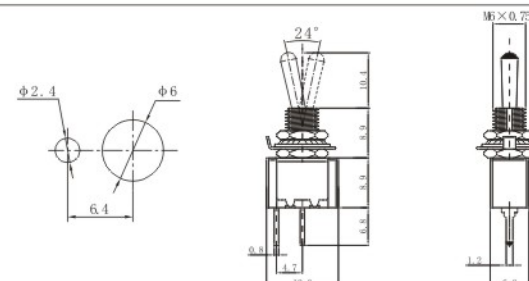


MTS-102-A2 ON-ON
MTS-103-A2 ON-OFF-ON
MTS-112-A2 ON-(ON)
MTS-113-A2 ON-OFF-(ON)
MTS-123-A2 (ON)-OFF-(ON)
SPDT 3P

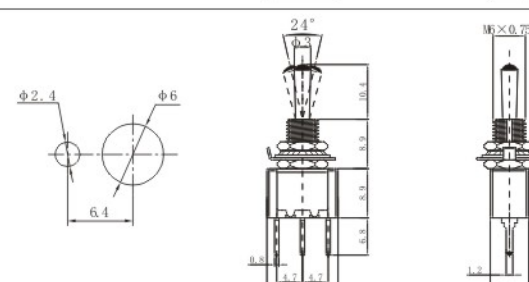


MTS-202-A2 ON-ON
MTS-203-A2 ON-OFF-ON
MTS-212-A2 ON-(ON)
MTS-213-A2 ON-OFF-(ON)
MTS-223-A2 (ON)-OFF-(ON)
DPDT 6P

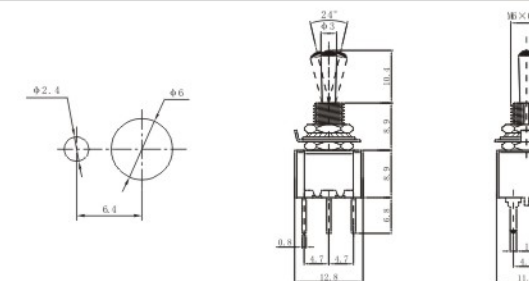


MTS-302-A2 ON-ON
MTS-303-A2 ON-OFF-ON
3PDT 9P

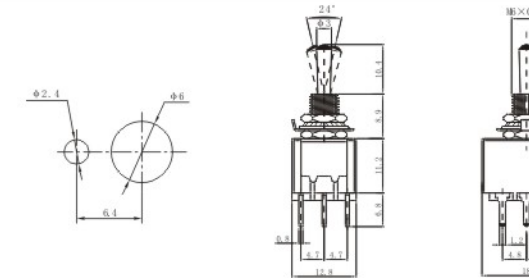


MTS-402-A2 ON-ON
MTS-403-A2 ON-OFF-ON
4PDT 12P

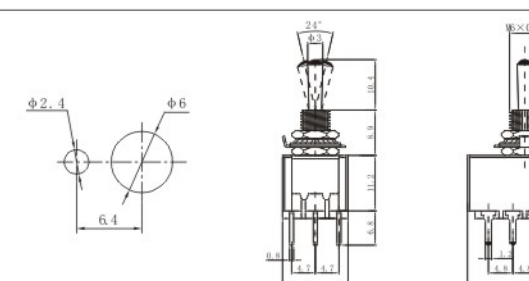


MTS-101-L1 ON-OFF SPST 2P
MTS-102-L1 ON-ON
MTS-103-L1 ON-OFF-ON
MTS-113-L1 ON-OFF-(ON)
MTS-123-L1 (ON)-OFF-(ON)
SPDT 3P

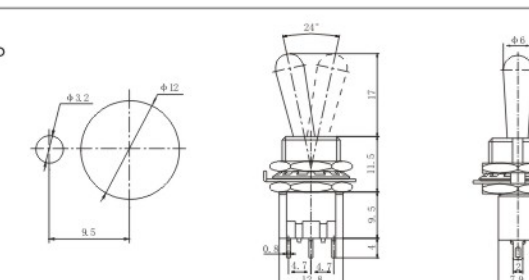

MTS-202-L1 ON-ON
MTS-203-L1 ON-OFF-ON
MTS-213-L1 ON-OFF-(ON)
MTS-223-L1 (ON)-OFF-(ON)
DPDT 6P

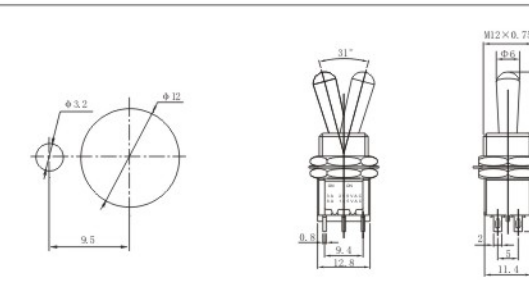


MTS-102-A2T ON-ON
MTS-112-A2T ON-(ON)
MTS-103-A2T ON-OFF-ON
MTS-113-A2T ON-OFF-(ON)
MTS-123-A2T (ON)-OFF-(ON)
SPDT 3P

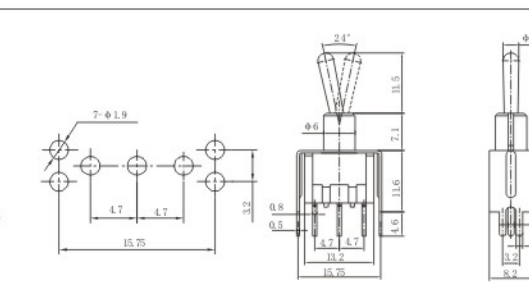





MTS-102-C3 ON-ON
MTS-112-C3 ON-(ON)
MTS-103-C3 ON-OFF-ON
MTS-113-C3 ON-OFF-(ON)
MTS-123-C3 (ON)-OFF-(ON)
SPDT 3P




MTS-202-C3 ON-ON
MTS-212-C3 ON-(ON)
MTS-203-C3 ON-OFF-ON
MTS-213-C3 ON-OFF-(ON)
MTS-223-C3 (ON)-OFF-(ON)
DPDT 6P




MTS-102-C4 ON-ON
MTS-112-C4 ON-(ON)
MTS-103-C4 ON-OFF-ON
MTS-113-C4 ON-OFF-(ON)
MTS-123-C4 (ON)-OFF-(ON)
SPDT 3P




MTS-202-C4 ON-ON
MTS-212-C4 ON-(ON)
MTS-203-C4 ON-OFF-ON
MTS-213-C4 ON-OFF-(ON)
MTS-223-C4 (ON)-OFF-(ON)
DPDT 6P




MTS-102-E1 ON-ON
MTS-112-E1 ON-(ON)
MTS-103-E1 ON-OFF-ON
MTS-113-E1 ON-OFF-(ON)
MTS-123-E1 (ON)-OFF-(ON)
SPDT 3P

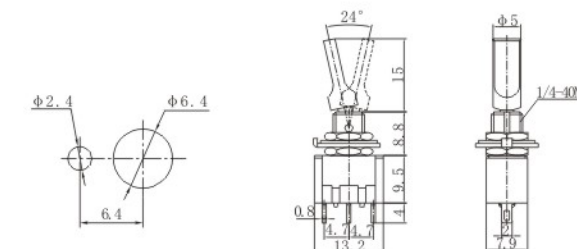


MTS-202-E1 ON-ON
MTS-212-E1 ON-(ON)
MTS-203-E1 ON-OFF-ON
MTS-213-E1 ON-OFF-(ON)
MTS-223-E1 (ON)-OFF-(ON)
DPDT 6P

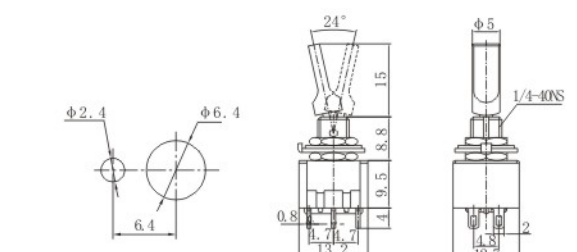


MTS-101-F1 ON-OFF SPST 2P
MTS-102-F1 ON-ON
MTS-112-F1 ON-(ON)
MTS-103-F1 ON-OFF-ON
MTS-113-F1 ON-OFF-(ON)
MTS-123-F1 (ON)-OFF-(ON)
SPDT 3P

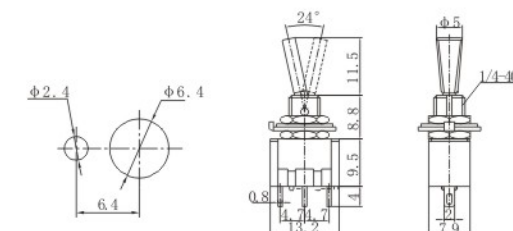


MTS-202-F1 ON-ON
MTS-212-F1 ON-(ON)
MTS-203-F1 ON-OFF-ON
MTS-213-F1 ON-OFF-(ON)
MTS-223-F1 (ON)-OFF-(ON)
DPDT 6P

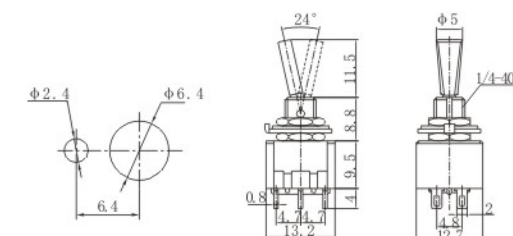


KNX-1-D1 ON-ON
KNX-103-D1 ON-OFF-ON
SPDT 3P
Available Color: R,G,Y,BL,BK,W

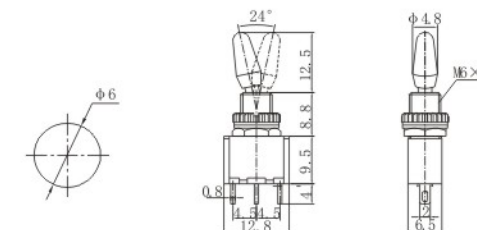


KNX-2-D1 ON-ON
KNX-203-D1 ON-OFF-ON
DPDT 6P
Available Color: R,G,Y,BL,BK,W

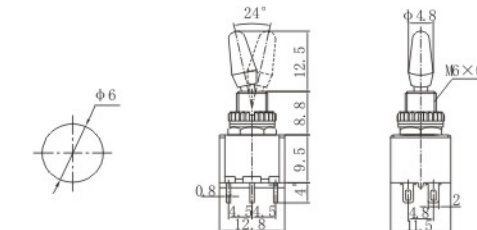

MTS-102-B1 ON-ON
MTS-112-B1 ON-(ON)
SPDT 3P

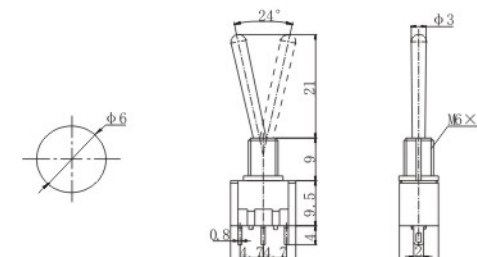


RLS-102-A1 ON-ON
RLS-112-A1 ON-(ON)
RLS-103-A1 ON-OFF-ON
RLS-113-A1 ON-OFF-(ON)
RLS-123-A1 (ON)-OFF-(ON)
SPDT 3P

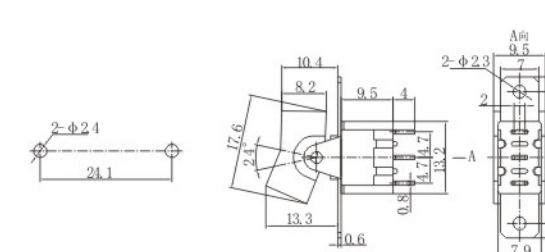





RLS-202-A1 ON-ON
RLS-212-A1 ON-(ON)
RLS-203-A1 ON-OFF-ON
RLS-213-A1 ON-OFF-(ON)
RLS-223-A1 (ON)-OFF-(ON)
DPDT 6P

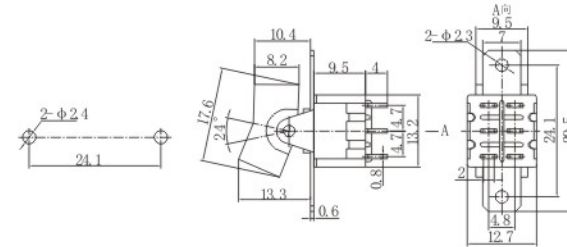


RLS-102-A3 ON-ON
RLS-112-A3 ON-(ON)
RLS-103-A3 ON-OFF-ON
RLS-113-A3 ON-OFF-(ON)
RLS-123-A3 (ON)-OFF-(ON)
SPDT 3P

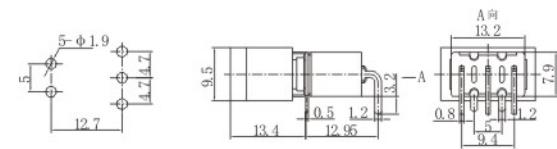


RLS-202-A3 ON-ON
RLS-212-A3 ON-(ON)
RLS-203-A3 ON-OFF-ON
RLS-213-A3 ON-OFF-(ON)
RLS-223-A3 (ON)-OFF-(ON)
DPDT 6P

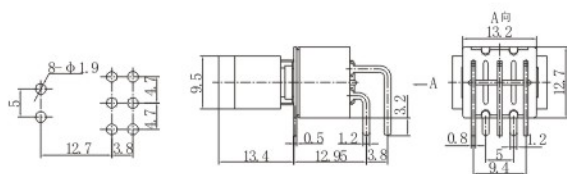


RLS-102-A4 ON-ON
RLS-112-A4 ON-(ON)
RLS-103-A4 ON-OFF-ON
RLS-113-A4 ON-OFF-(ON)
RLS-123-A4 (ON)-OFF-(ON)
SPDT 3P

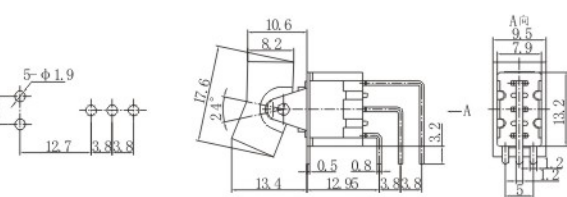

RLS-102-F1 ON-ON
RLS-112-F1 ON-(ON)
RLS-103-F1 ON-OFF-ON
RLS-113-F1 ON-OFF-(ON)
RLS-123-F1 (ON)-OFF-(ON)
SPDT 3P

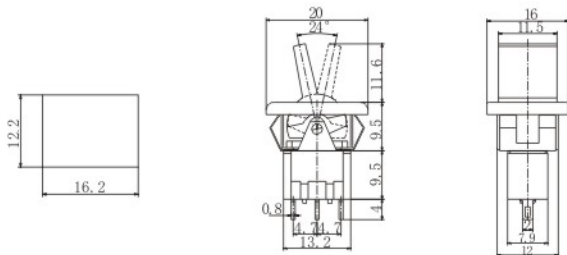

RLS-202-F1 ON-ON
RLS-212-F1 ON-(ON)
RLS-203-F1 ON-OFF-ON
RLS-213-F1 ON-OFF-(ON)
RLS-223-F1 (ON)-OFF-(ON)
DPDT 6P

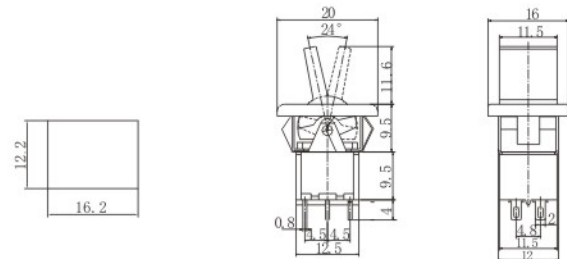

中型钮子开关 Medium Toggle Switch

技术特性 Specifications

- 规格 Rating: () 10A 125VAC; 6A 250VAC
(A) 15A 125VAC; 10A 250VAC
(AA) 20A 125VAC; 15A 250VAC
- 接触电阻 Contact Resistance: 50mΩ max

- 绝缘电阻 Insulation Resistance: 500VDC 1000MΩ Min
- 耐电压 Dielectric Strength: 1500VAC, 1Minute
- 操作温度 Operating Temperature: -25℃~+85℃
- 电气寿命 Electrical Life: ≥10,000 Cycles

选型说明 How to order

钮子外壳类型 Housing shape	刀数 Poles	电路特性 Switch Function	规格 Rating	端子种类 Terminal options	手柄种类 Handle options	基座颜色 Housing color
KN3 A B C D E	1 2 3 4	01 02 11 12 03 13 23	A P E	Screw Terminal () Solder Terminal (S) PC Terminal (P) Press Terminal (T) Hitch Terminal (R)	() (D) (E) (C) (L)	BK 黑色 Black BN 棕色 Brown OG 橘黄 Orange

() : Means Momentary

防水帽 Waterproof Cover



WPC-06



WPC-11A



WPC-12



WPC-08




WPC-09




WPC-10




KN3C-101 ON-OFF
KN3C-111 OFF-(ON)
SPST 2P

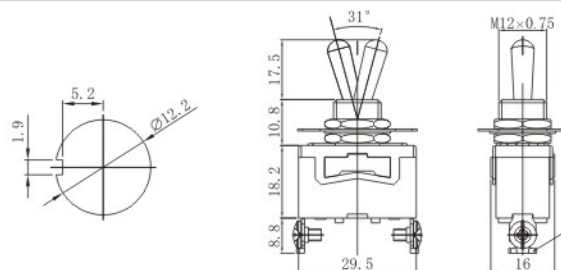


KN3C-102 ON-ON
KN3C-112 ON-(ON)
KN3C-103 ON-OFF-ON
KN3C-113 ON-OFF-(ON)
KN3C-123 (ON)-OFF-(ON)
SPDT 3P

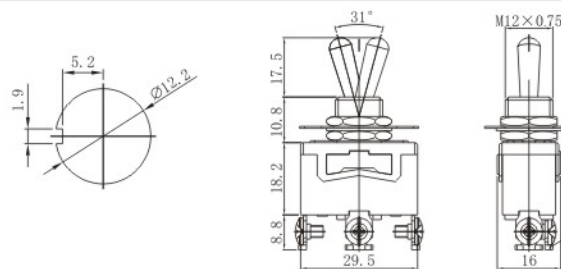


KN3C-201 ON-OFF
KN3C-211 OFF-(ON)
DPST 4P

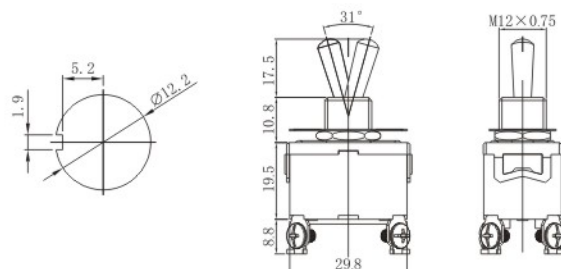


KN3C-202 ON-ON
KN3C-212 ON-(ON)
KN3C-203 ON-OFF-ON
KN3C-213 ON-OFF-(ON)
KN3C-223 (ON)-OFF-(ON)
DPDT 6P

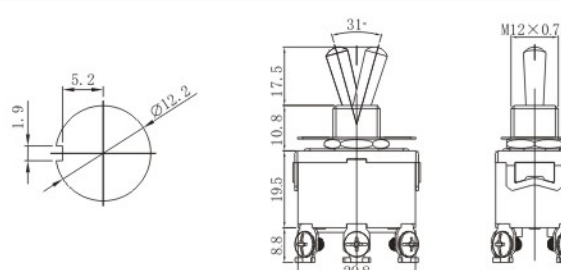


KN3C-302 ON-ON
KN3C-303 ON-OFF-ON
3PDT 9P

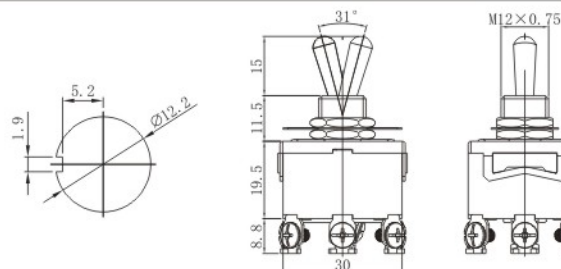


KN3C-402 ON-ON
KN3C-403 ON-OFF-ON
4PDT 12P

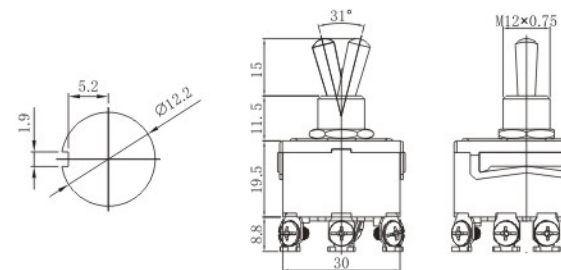


KN3C-101P ON-OFF
KN3C-111P OFF-(ON)
SPST 2P

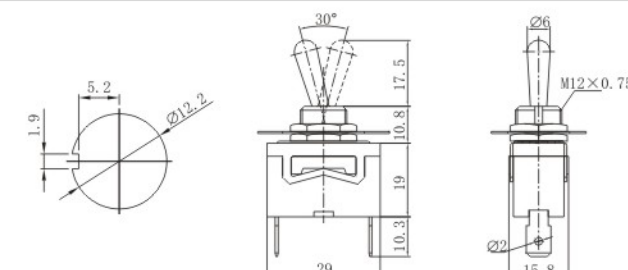


KN3C-102P ON-ON
KN3C-112P ON-(ON)
KN3C-103P ON-OFF-ON
KN3C-113P ON-OFF-(ON)
KN3C-123P (ON)-OFF-(ON)
SPDT 3P

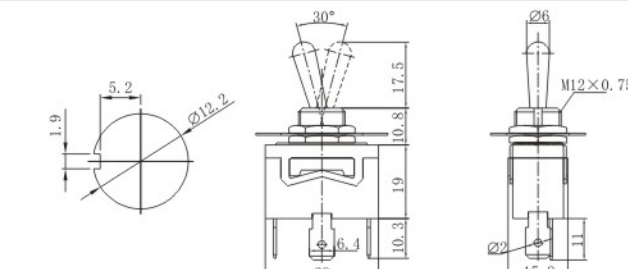


KN3C-201P ON-OFF
KN3C-211P OFF-(ON)
DPST 4P

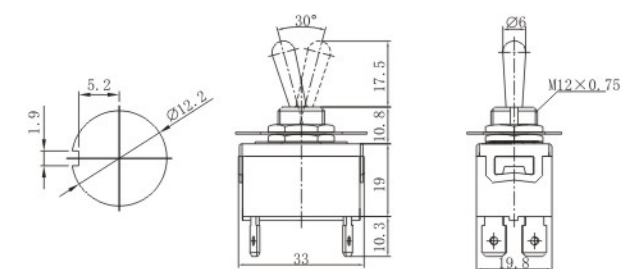


KN3C-202P ON-ON
KN3C-212P ON-(ON)
KN3C-203P ON-OFF-ON
KN3C-213P ON-OFF-(ON)
KN3C-223P (ON)-OFF-(ON)
DPDT 6P

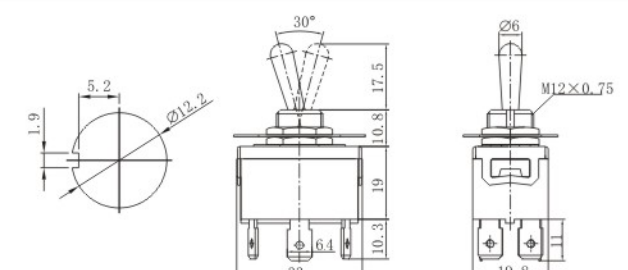

KN3C-302P ON-ON
KN3C-303P ON-OFF-ON
3PDT 9P

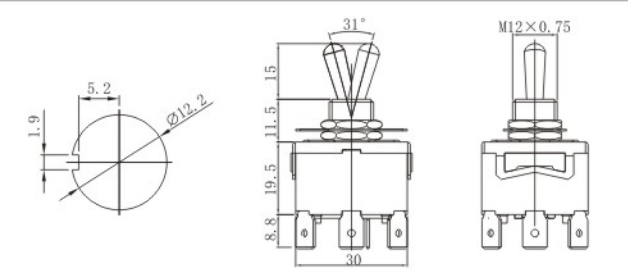


KN3C-402P ON-ON
KN3C-403P ON-OFF-ON
4PDT 12P

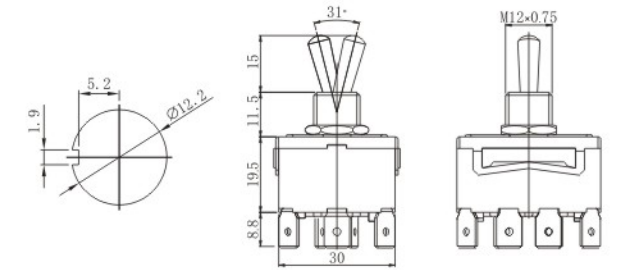





KN3A-101 ON-OFF
SPST 2P

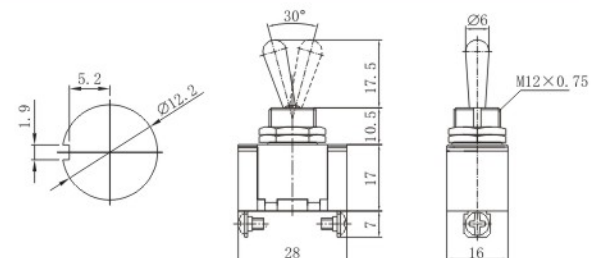


KN3A-102 ON-ON
KN3A-112 ON-(ON)
KN3A-103 ON-OFF-ON
KN3A-113 ON-OFF-(ON)
KN3A-123 (ON)-OFF-(ON)
SPDT 3P

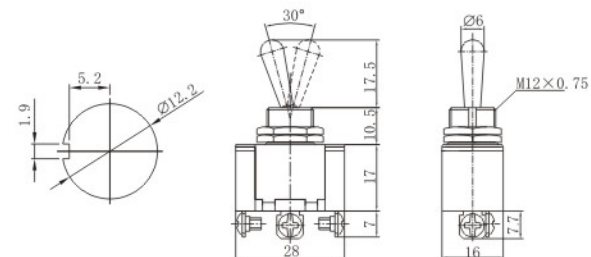


KN3A-101P ON-OFF
SPST 2P

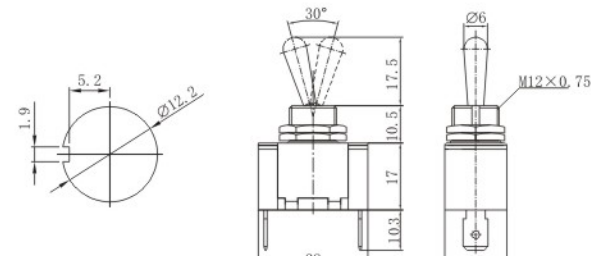


KN3A-102P ON-ON
KN3A-112P ON-(ON)
KN3A-103P ON-OFF-ON
KN3A-113P ON-OFF-(ON)
KN3A-123P (ON)-OFF-(ON)
SPDT 3P

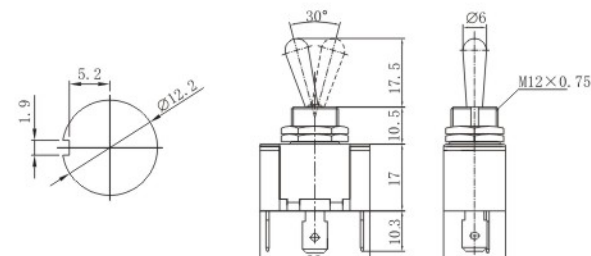


KN3B-101 ON-OFF
SPST 2P

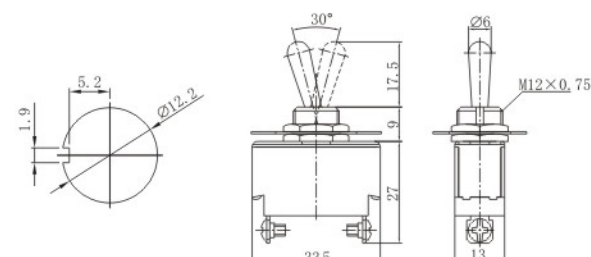


KN3B-102 ON-ON
KN3B-112 ON-(ON)
KN3B-103 ON-OFF-ON
KN3B-113 ON-OFF-(ON)
KN3B-123 (ON)-OFF-(ON)
SPDT 3P

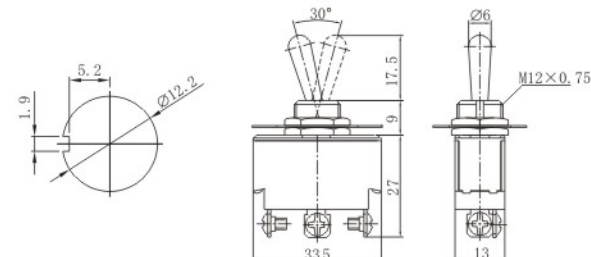


KN3B-201 ON-OFF
DPST 4P

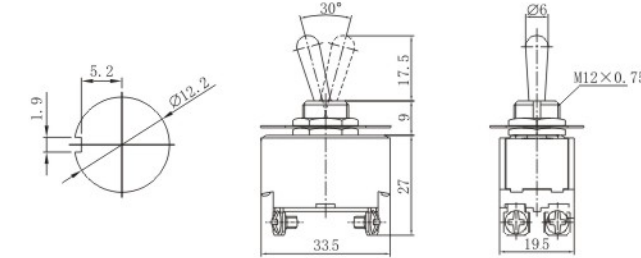


KN3B-202 ON-ON
KN3B-212 ON-(ON)
KN3B-203 ON-OFF-ON
KN3B-213 ON-OFF-(ON)
KN3B-223 (ON)-OFF-(ON)
DPDT 6P

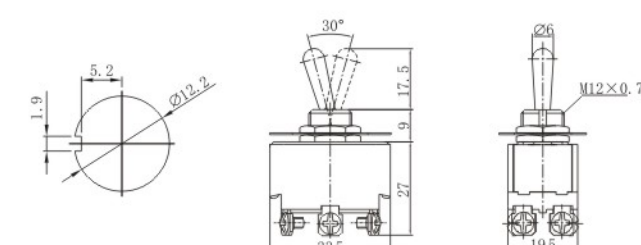


KN-32 ON-ON
DPDT 6P
10A 125VAC; 5A 250VAC

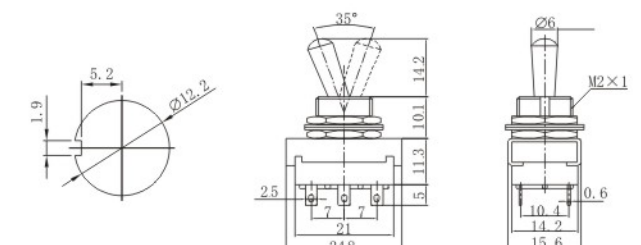


KN3-3A ON-ON
DPDT 6P
6A 125VAC; 3A 250VAC

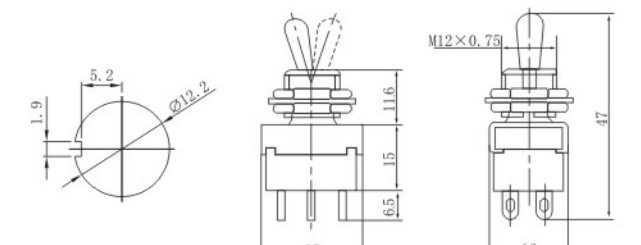

KN3-1 ON-OFF
SPST 2P
4A 125VAC; 2A 250VAC

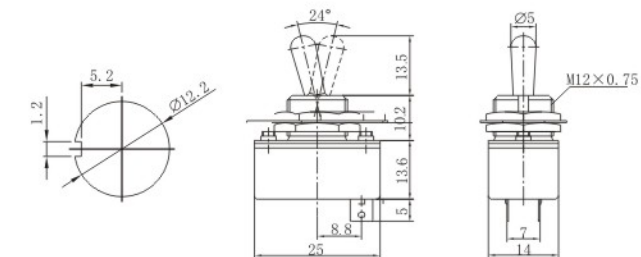


KN3-2 ON-ON
SPDT 4P
KN3-3 ON-ON
DPDT 6P
4A 125VAC; 2A 250VAC

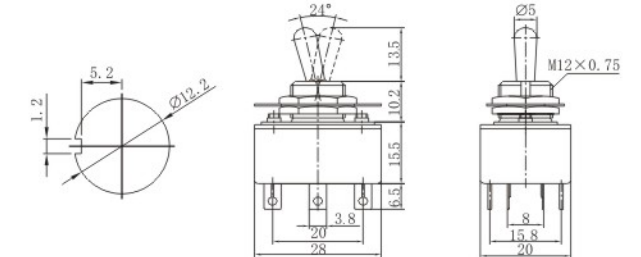





KN3D-101 ON-OFF 2P
KN3D-102 ON-ON 3P
KN3D-103 ON-OFF-ON 3P
6A 125VAC; 3A 250VAC;
25A 12VDC

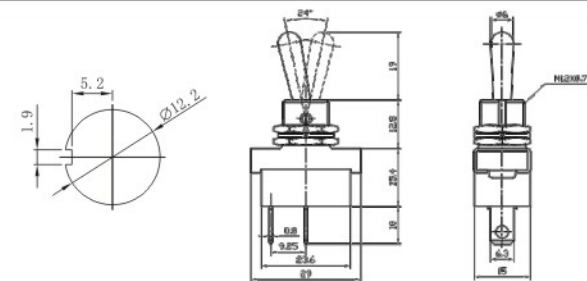


KN3C-202E ON-ON
KN3C-212E ON-(ON)
KN3C-203E ON-OFF-ON
KN3C-213E ON-OFF-(ON)
KN3C-223E (ON)-OFF-(ON)
DPDT 6P

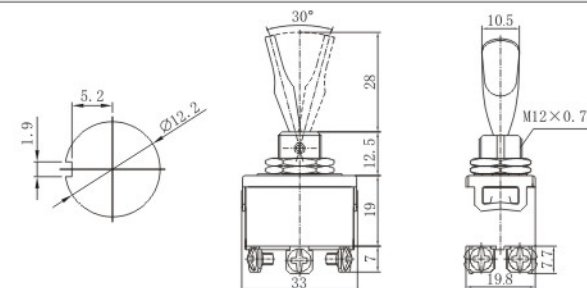


KNS-1 ON-OFF
SPST 2P
6A 125VAC; 3A 250VAC;
10A 12VDC

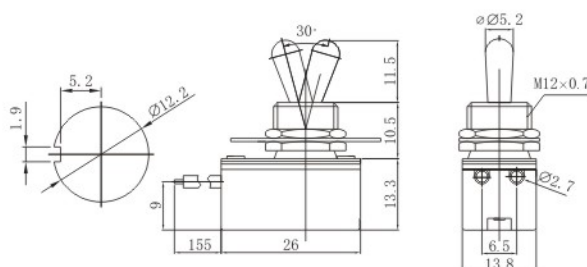


KNS-2 ON-OFF
SPST 2P
6A 125VAC; 3A 250VAC;
10A 12VDC

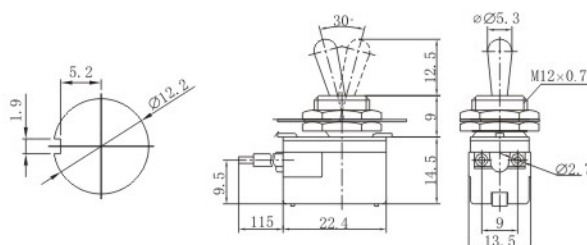

KNH-1 ON-OFF
SPST 2P
6A 125VAC; 3A 250VAC;
10A 12VDC

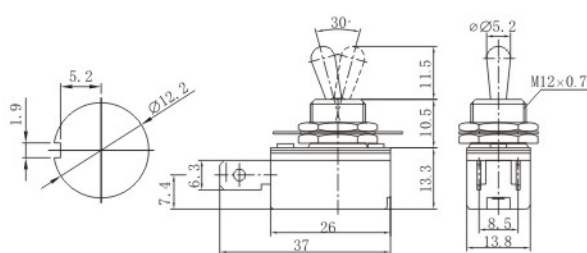

KNH-1S ON-OFF
SPST 2P(Screw Terminals)
6A 125VAC; 3A 250VAC;
10A 12VDC

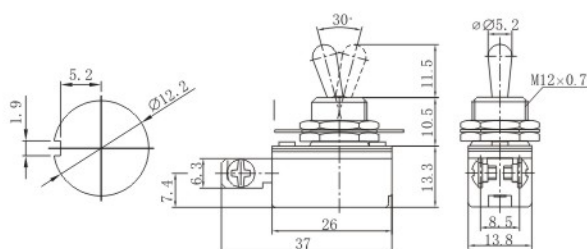


Micro Switch

微动开关



www.chinadaier.com

ISO9001 Professional
Manufacturer of Switches
专业缔造高品质开关

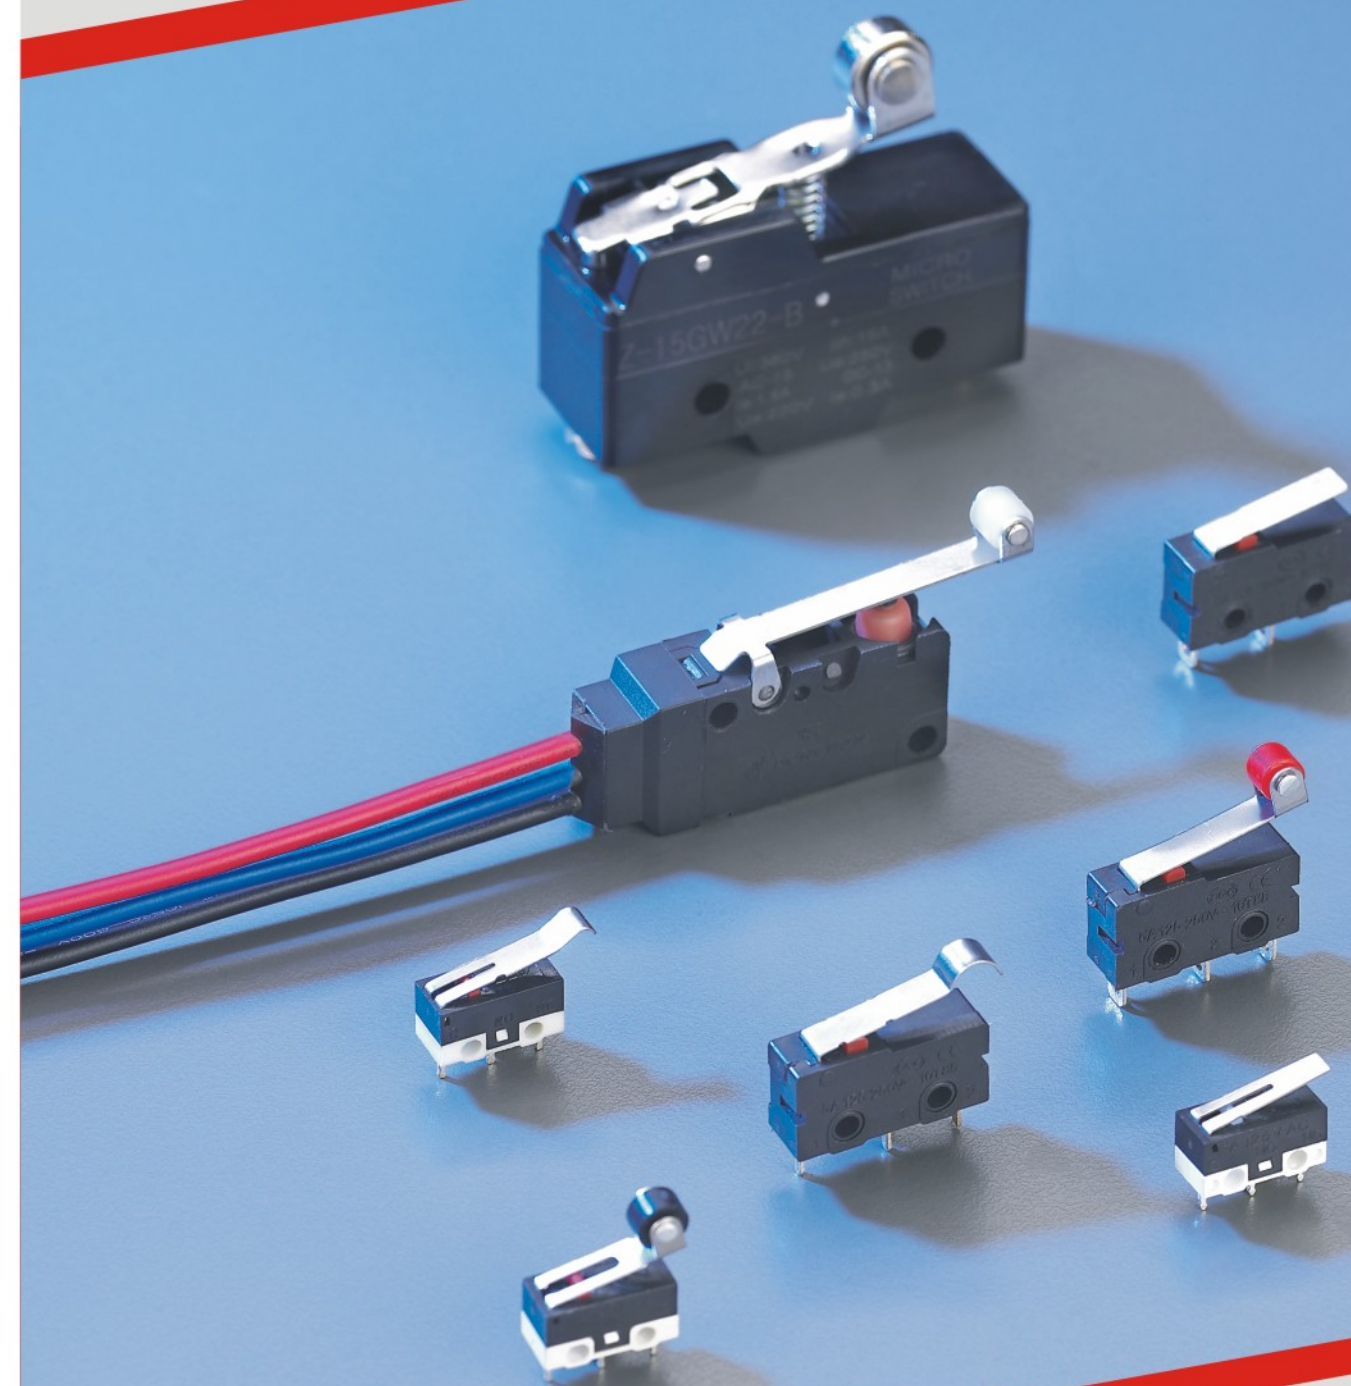


超小型微动开关 Sub-Miniature Micro Switch


技术特性 Specifications

- | | |
|---|--|
| 1. 规格 Rating: 1A~3A 125/250VAC | 5. 操作温度 Operating Temperature: -25°C ~ +75°C |
| 2. 接触电阻 Contact Resistance: $\leq 50\text{m}\Omega$ | 6. 环境湿度 Ambient Humidity Used: $<85\% \text{RH}$ |
| 3. 绝缘电阻 Insulation Resistance: $\geq 100\text{M}\Omega (500\text{VDC})$ | 6. 电气寿命 Electrical Life: $\geq 10,000$ Cycles |
| 4. 耐电压 Dielectric strength: 600VAC 1Minute | 7. 机械寿命 Mechanical Life: $\geq 100,000$ Cycles |


选型说明 How to order

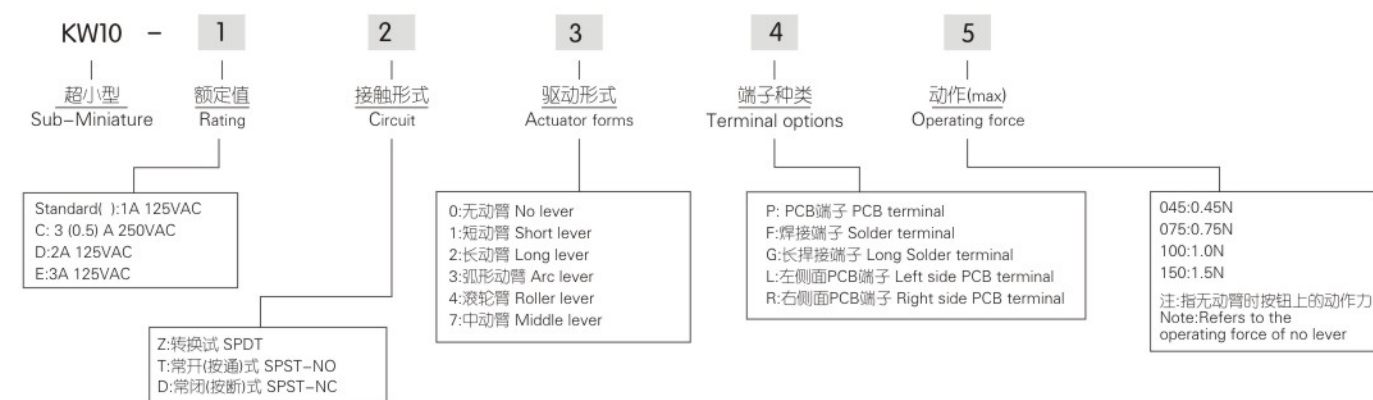


端子尺寸 Terminal dimensions

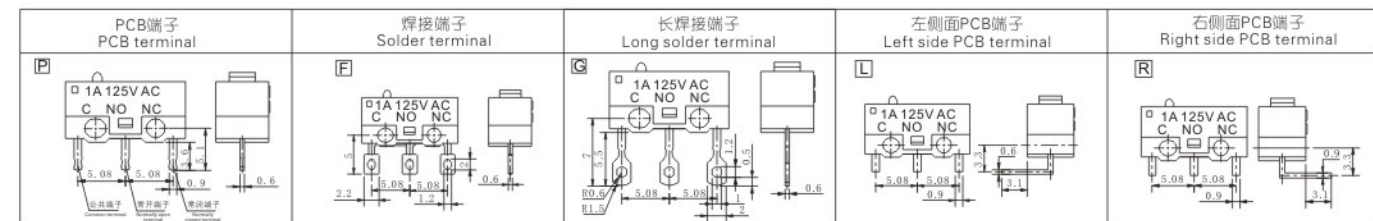


安装孔尺寸 Mounting hole dimensions

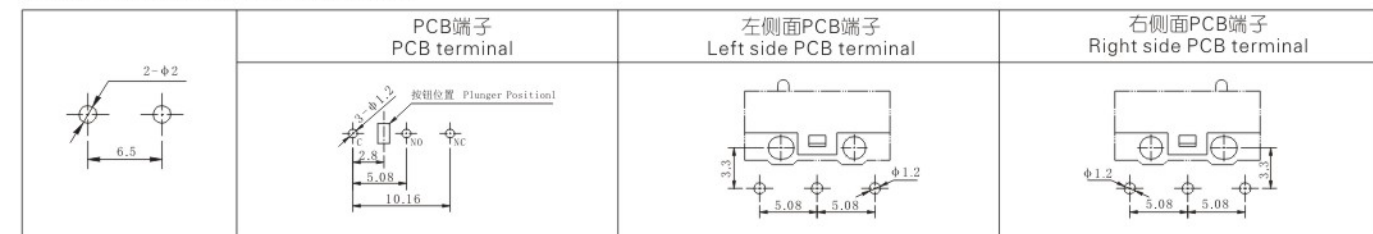

接触形式说明书 Circuit illustration

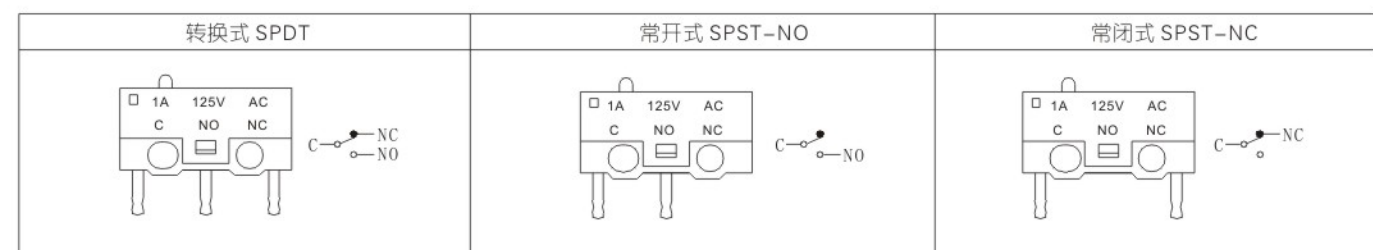

外形尺寸 Dimension

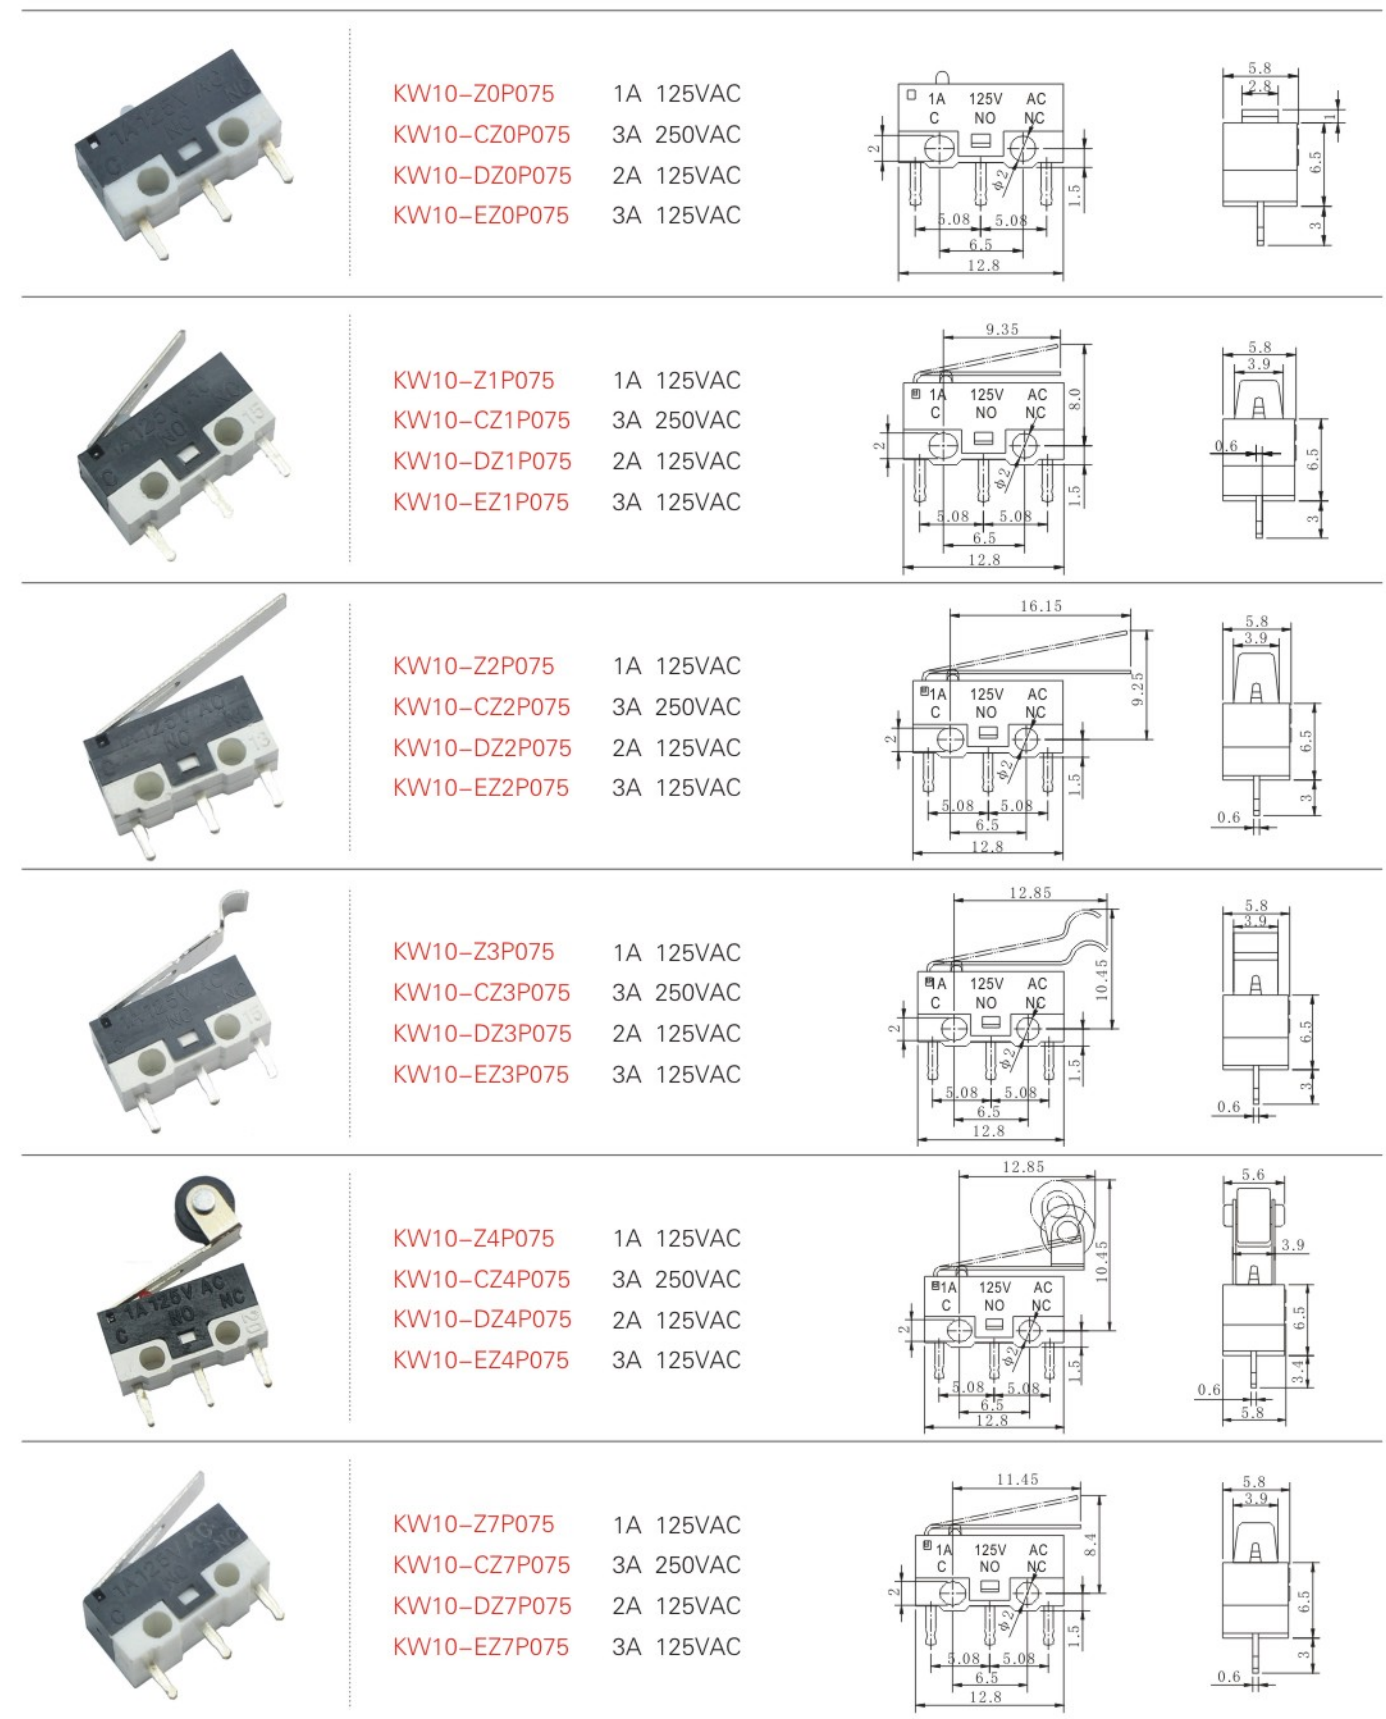


小型微动开关 Miniature Micro Switch


技术特性 Specifications

- | | |
|--|--|
| 1. 规格 Rating: 5A~10A 125/250VAC | 5. 操作温度 Operating Temperature: -25°C ~ +85°C |
| 2. 接触电阻 Contact Resistance: $\leq 50\text{m}\Omega$ | 6. 环境湿度 Ambient Humidity Used: <85%RH |
| 3. 绝缘电阻 Insulation Resistance: $\geq 100\text{M}\Omega$ (500VDC) | 6. 电气寿命 Electrical Life: $\geq 10,000$ Cycles |
| 4. 耐电压 Dielectric strength: 1000VAC 1Minute | 7. 机械寿命 Mechanical Life: $\geq 100,000$ Cycles |


选型说明 How to order

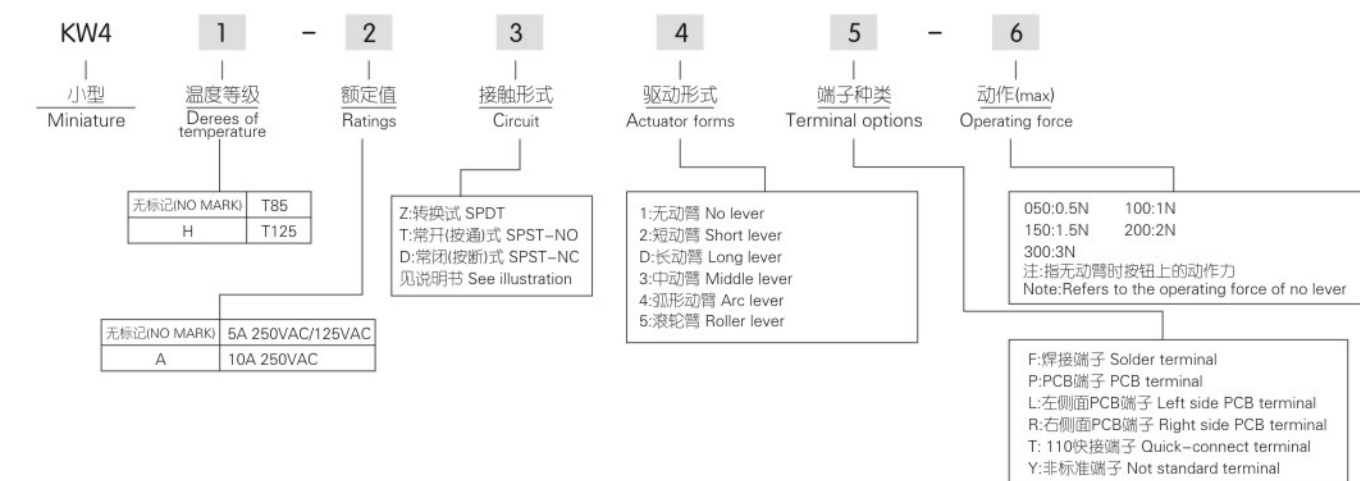


接触形式说明书 Circuit illustration

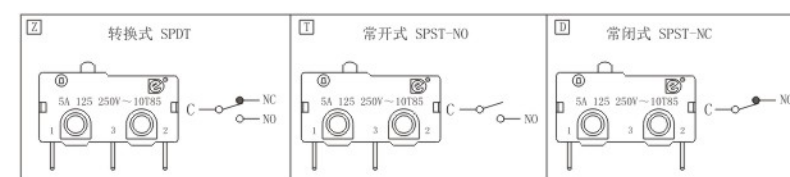

接线端子尺寸 Terminal dimensions

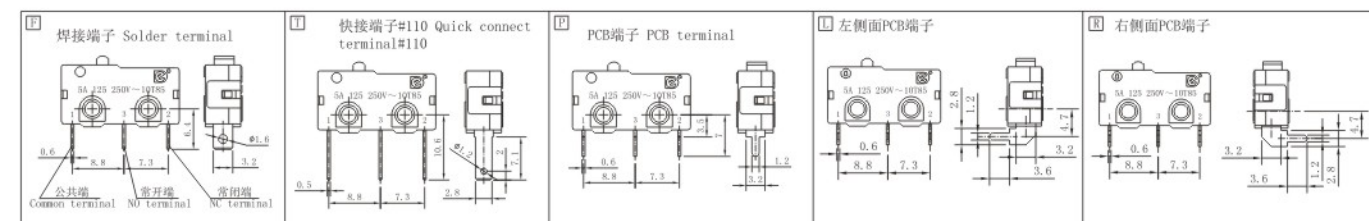


安装孔尺寸 Mounting hole dimensions

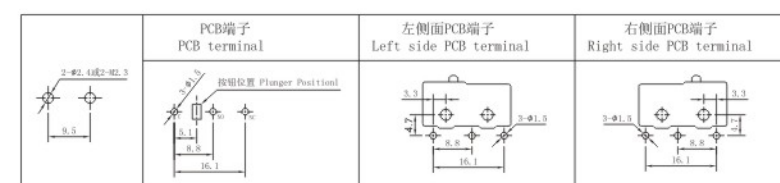


外形尺寸 Dimension





KW4-Z1F100
KW4-Z1F150
KW4-Z1F200

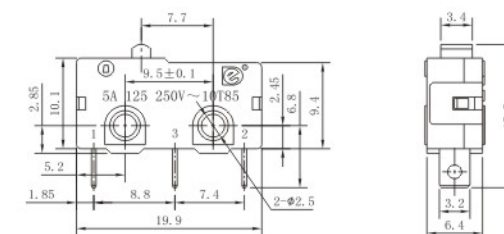


KW4-Z2F100
KW4-Z2F150
KW4-Z2F200

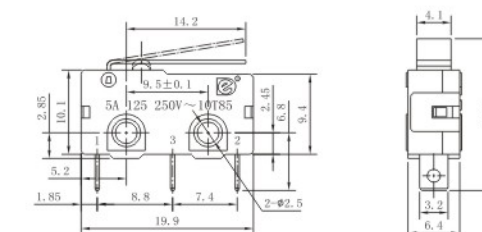


KW4-Z3F100
KW4-Z3F150
KW4-Z3F200

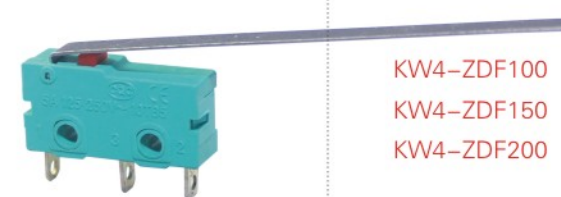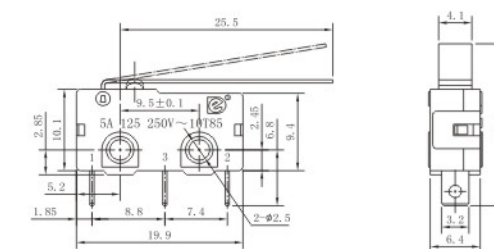


KW4-ZDF100
KW4-ZDF150
KW4-ZDF200

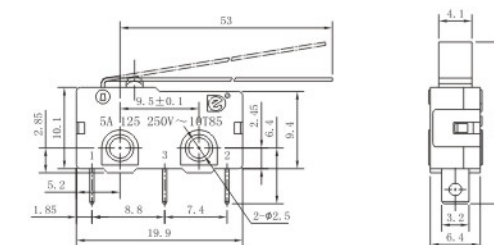

KW4-Z4F100
KW4-Z4F150
KW4-Z4F200

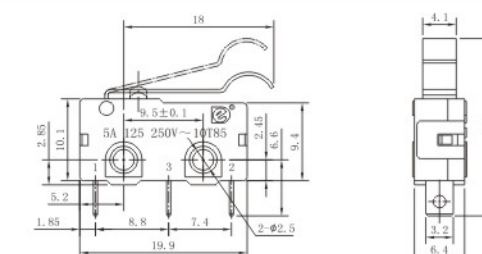

KW4-Z5F100
KW4-Z5F150
KW4-Z5F200

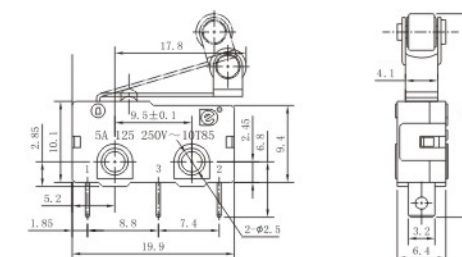

中型微动开关系列 Medium Micro Switch

技术特性 Specifications


- 规格 Rating: 16A 250VAC/20A 125VAC
- 接触电阻 Contact Resistance: $\leq 30\text{m}\Omega$
- 绝缘电阻 Insulation Resistance: $\geq 100\text{M}\Omega$ (500VDC)
- 耐电压 Dielectric strength: 1500VAC 1Minute
- 操作温度 Operating Temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 环境湿度 Ambient Humidity Used: $<85\%\text{RH}$
- 电气寿命 Electrical Life: $\geq 10,000$ Cycles
- 机械寿命 Mechanical Life: $\geq 100,000$ Cycles

注:指无动臂时按钮上的动作力 Note:Refers to the operating force of no lever


选型说明 How to order



接触形式说明书 Circuit illustration

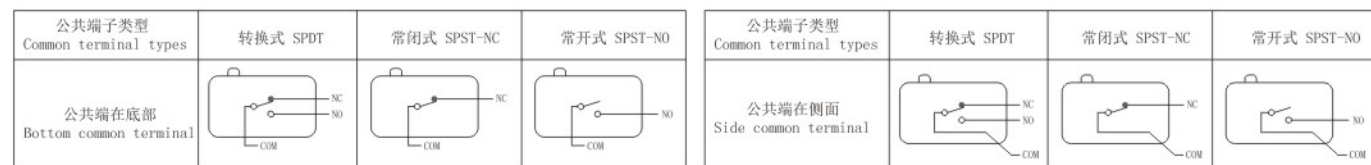


接线端子尺寸 Terminal dimensions

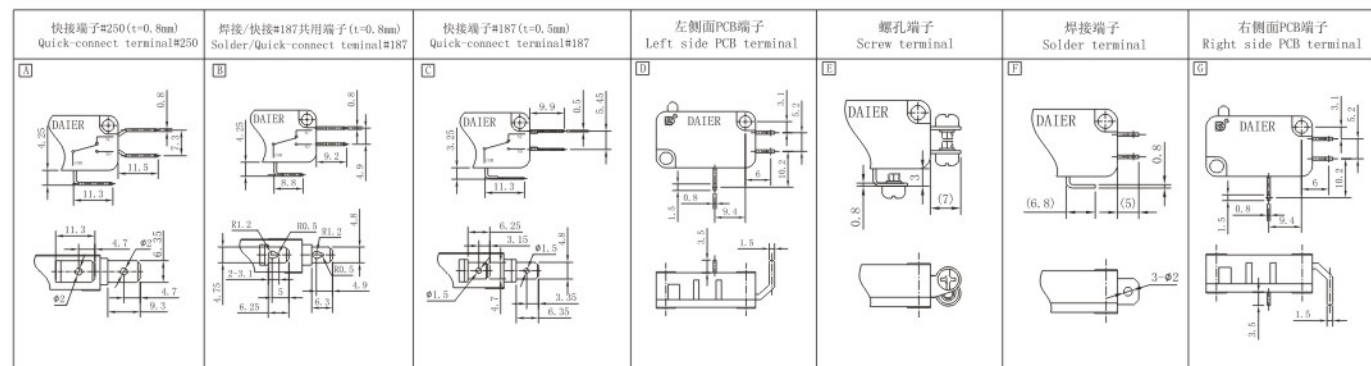


外形尺寸 Dimension




KW1-103-Z1A100
KW1-103-Z1A150
KW1-103-Z1A200
KW1-103-Z1A300

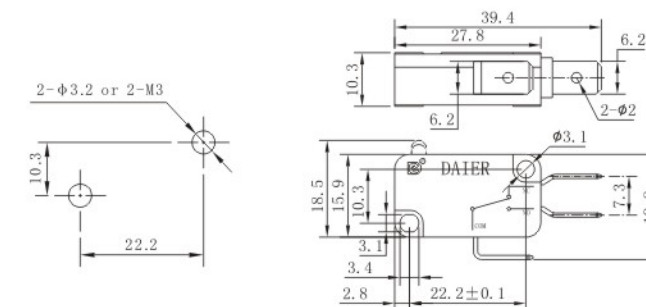


KW1-103-Z2A100
KW1-103-Z2A150
KW1-103-Z2A200
KW1-103-Z2A300

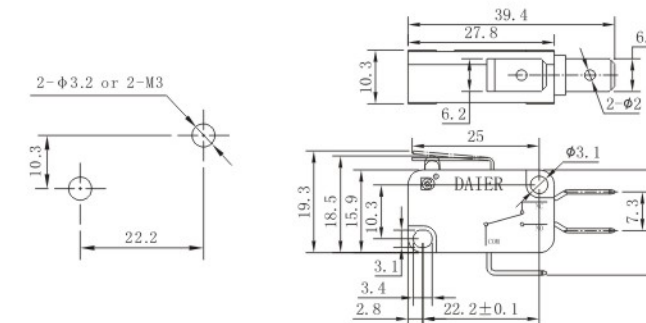


KW1-103-Z3A100
KW1-103-Z3A150
KW1-103-Z3A200
KW1-103-Z3A300





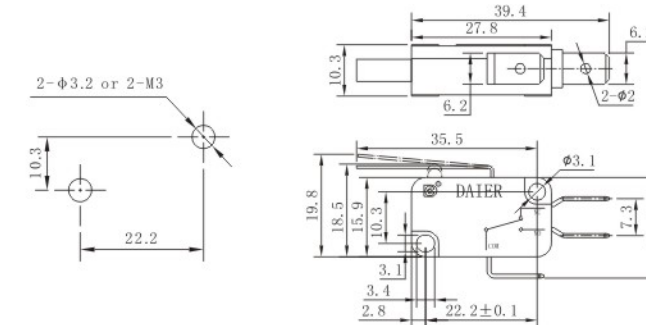




KW1-103-Z4A100
KW1-103-Z4A150
KW1-103-Z4A200
KW1-103-Z4A300

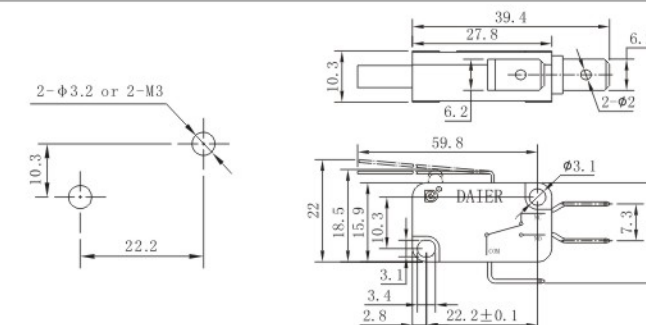

KW1-103-Z6A100
KW1-103-Z6A150
KW1-103-Z6A200
KW1-103-Z6A300

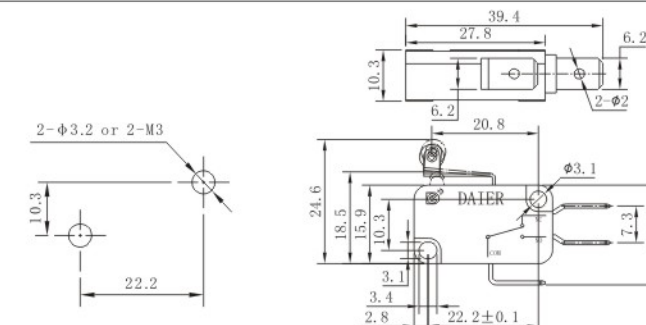

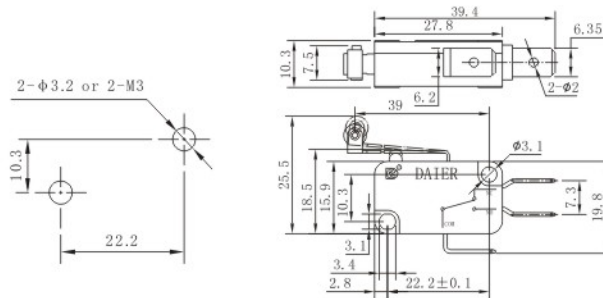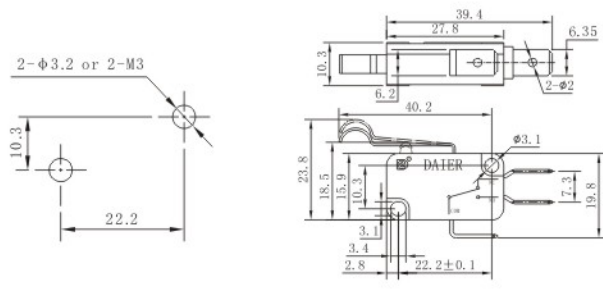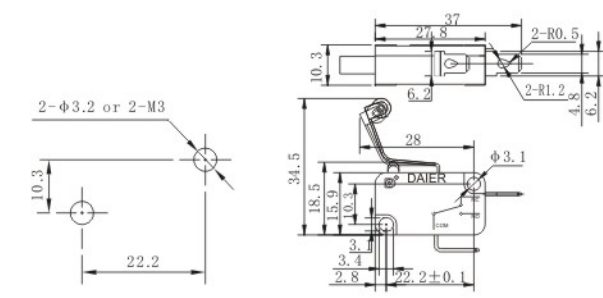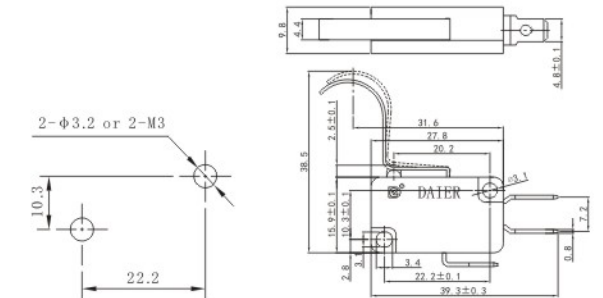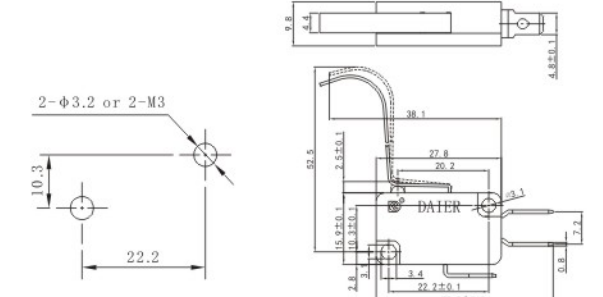	KW1-103-Z7A100 KW1-103-Z7A150 KW1-103-Z7A200 KW1-103-Z7A300	
	KW1-103-Z5A100 KW1-103-Z5A150 KW1-103-Z5A200 KW1-103-Z5A300	
	KW1-103-D13B100 KW1-103-D13B150 KW1-103-D13B200 KW1-103-D13B300	
	KW1-103-Z11A100 KW1-103-Z11A150 KW1-103-Z11A200 KW1-103-Z11A300	
	KW1-103-Z12A100 KW1-103-Z12A150 KW1-103-Z12A200 KW1-103-Z12A300	

		
KW1-103-Z10B200	WK1-1 6A 125V; 3A 250VAC	G303-A3 0.1A 250VAC 3A12VDC IP67
		
DS-438 ON-(ON) 16A 250VAC	HS-1 有声型	G303-A8 0.1A 250VAC 3A12VDC IP67
		
KW1-103-Z2B-D	LXW20-11 15A 380VAC	WS1-Z3-F150 5A 250VAC IP67
		
KW1-103-Q Air Pressure Switch	KW-1037	WS1-Z6-W150R200 5A 250VAC IP67
		
BVM3 ON-(OFF) 10A 250VAC; 15A 125VAC	KW-1038	WS2-Z6F200 10A 125/250VAC IP67
		
WK3-1 6A 125VAC; 3A 250VAC	KW-1039	WS2-Z4W200 10A 125/250VAC IP67

		
Z-15G-B	Z-15HW24-B	D4MC-1000
		
Z-15GD-B	Z-15HW78-B	D4MC-1020
		
Z-15GW21-B	Z-15GW2277-B	D4MC-2000
		
Z-15GW-B	Z-15GQ-B	D4MC-2020
		
Z-15GW22-B	Z-15GQ22-B	D4MC-5000
		
Z-15GW2-B	Z-15GQ21-B	D4MC-5020

Rocker Switch

船型开关

UL US CE CQC RoHS

www.chinadaier.com

ISO9001 Professional
Manufacturer of Switches
专业缔造高品质开关




















KCD5 Series Rocker Switch

技术特性 Specification

- 规格 Rating: 6A 125VAC; 3A 250VAC
- 接触电阻 Contact Resistance: 35mΩ max
- 绝缘电阻 Insulation Resistance: 500VDC 100MΩ min
- 耐电压 Dielectric Strength: 1500VAC, 1 Minute
- 操作温度 Operating Temperature: -25℃~ +85℃
- 电气寿命 Electrical Life: ≥10,000 Cycles

型号说明 Model Information

KCD	5	-	2	-	1	01	N	L	-	C3	-	R	B	-	220V
	超小型		序号		单刀	功能	灯	端子类型		标记		按钮颜色	外壳颜色		灯电压
	Sub-Miniature		Series		1 Pole	Function	Lamp	Terminals		Marking		Actuator Color	Housing Color		Lamp Volt
						01 ON-OFF	No mark No Lamp	No mark Straight		C1		B 黑色Black	B 黑色Black		3V
						02 ON-ON	N With Lamp	L Right Angle		C2		W 白色White	W 白色White		6V
						03 ON-OFF-ON		T Through hole		C3		R 红色Red	R 红色Red		12V
						11 (ON-OFF)单复位				C4		G 绿色Green	G 绿色Green		24V
						12 (ON-ON)单复位				C5		Y 黄色Yellow	Y 黄色Yellow		48V
						13 (ON-OFF-ON)单复位				C6		BL 蓝色Blue	BL 蓝色Blue		110V
						23 (ON-OFF-ON)双复位				C7		O 橙色Orange	O 橙色Orange		220V
										C8		GR 灰色Gray	GR 灰色Gray		
										C9		C 棕色Brown	C 棕色Brown		
										C10					

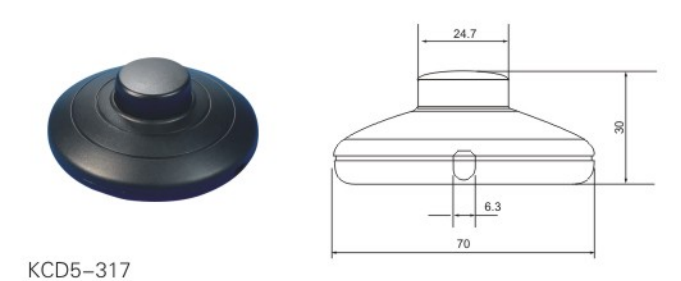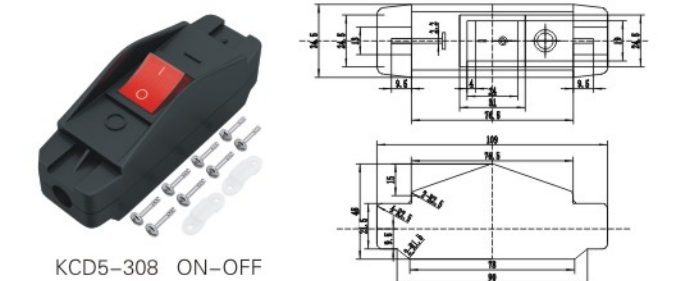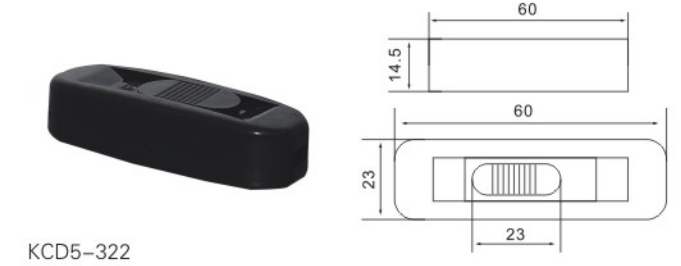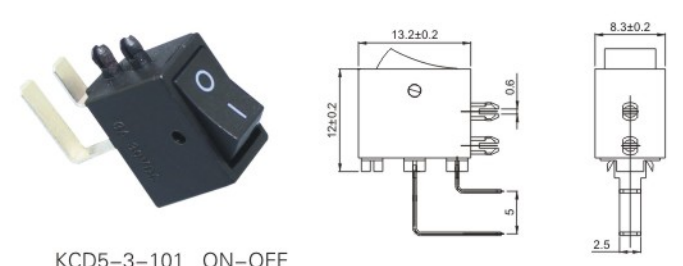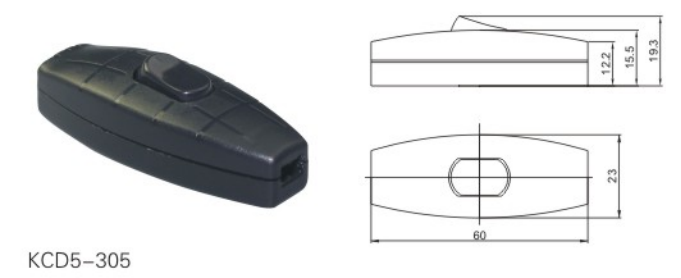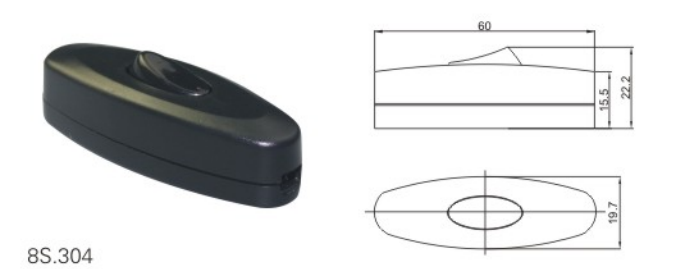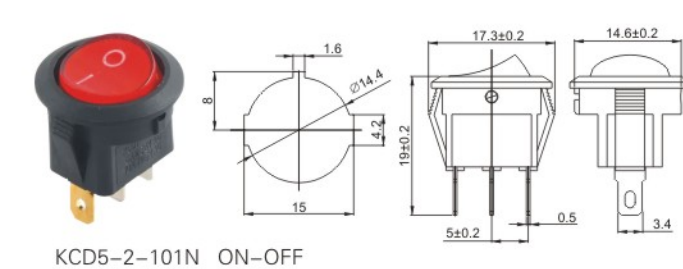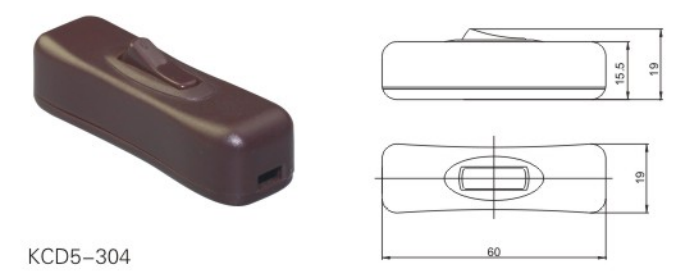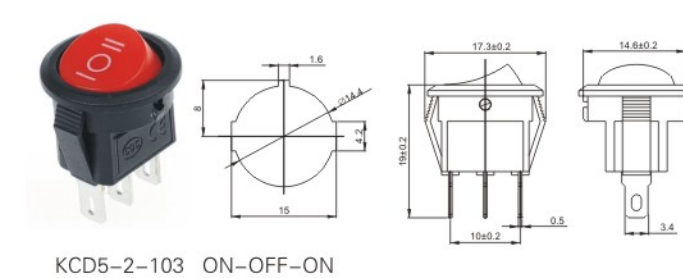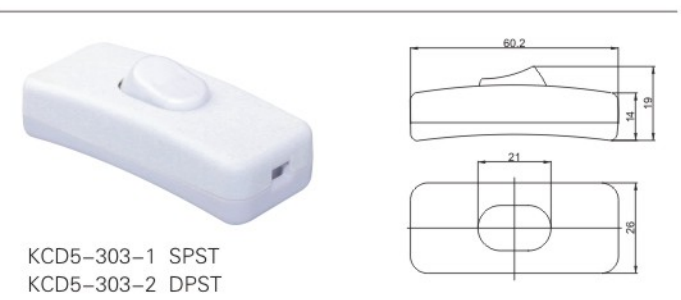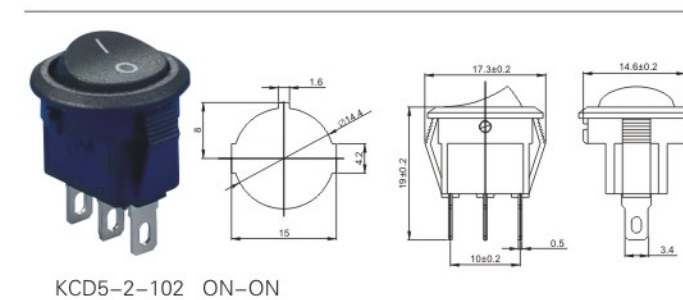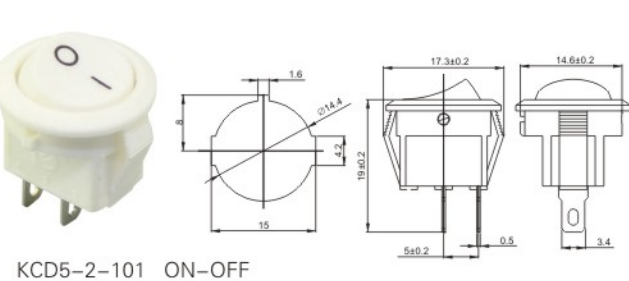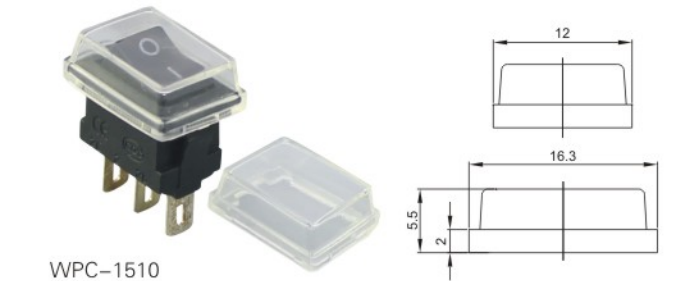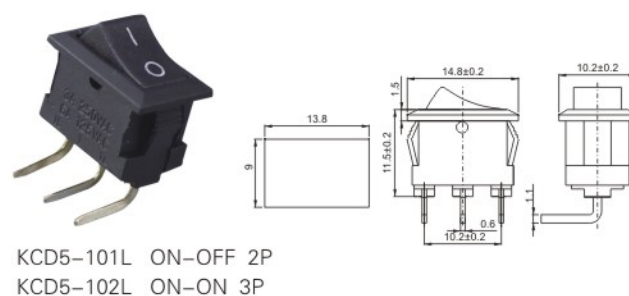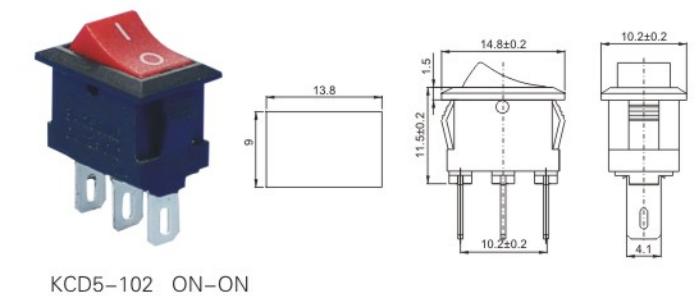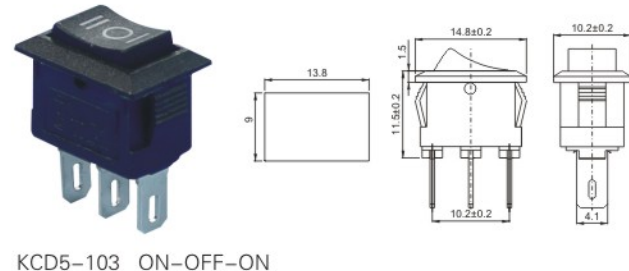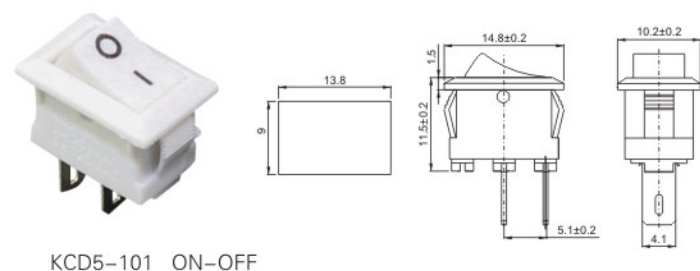



KCD1 Series Rocker Switch


技术特性 Specification


- 规格 Rating: 10A 125VAC; 6A 250VAC
- 接触电阻 Contact Resistance: 35mΩ max
- 绝缘电阻 Insulation Resistance: 500VDC 100MΩ min
- 耐电压 Dielectric Strength: 1500VAC, 1 Minute
- 操作温度 Operating Temperature: -25℃ ~ +85℃
- 电气寿命 Electrical Life: ≥10,000 Cycles

型号说明 Model Information

特征 Features	序号 Series	刀数 Poles	功能 Function	带灯状态 Lamp	按钮类型 Actuator	端子类型 Terminals	标记 Marking	按钮颜色 Actuator Color	外壳颜色 Housing Color	灯电压 Lamp Volt
1 Miniature	1 1 pole 1 button	01 ON-OFF	No Mark	No lamp	No Mark	Straight	C1	B 黑色Black	B 黑色Black	3V
2 Medium 2 poles	2 2 pole 1 button	02 ON-ON	N	Lens illuminated	D	Short	C2	W 白色White	W 白色White	6V
3 Medium 1 pole	2 2 pole 1 button	03 ON-OFF-ON	EN	Dot illuminated	L	Right Angle	C3	R 红色Red	R 红色Red	12V
5 Sub-Miniature	21 2 pole 2 button	11 (ON)-OFF(单复位)	No Mark	C shape	S	Screw	C4	G 绿色Green	G 绿色Green	24V
	3 3 pole 1 button	12 (ON)-ON(单复位)	W	Waterproof	C	Through hole	C5	Y 黄色Yellow	Y 黄色Yellow	48V
		13 (ON)-OFF-ON(单复位)	H	High Actuator			C6	BL 蓝色Blue	BL 蓝色Blue	110V
		23 (ON)-OFF-ON(双复位)	V	V shape			C7	O 橙色Orange	O 橙色Orange	220V
							C8	GR 灰色Gray	GR 灰色Gray	
							C9	C 棕色Brown	C 棕色Brown	
							C10			
							CX			

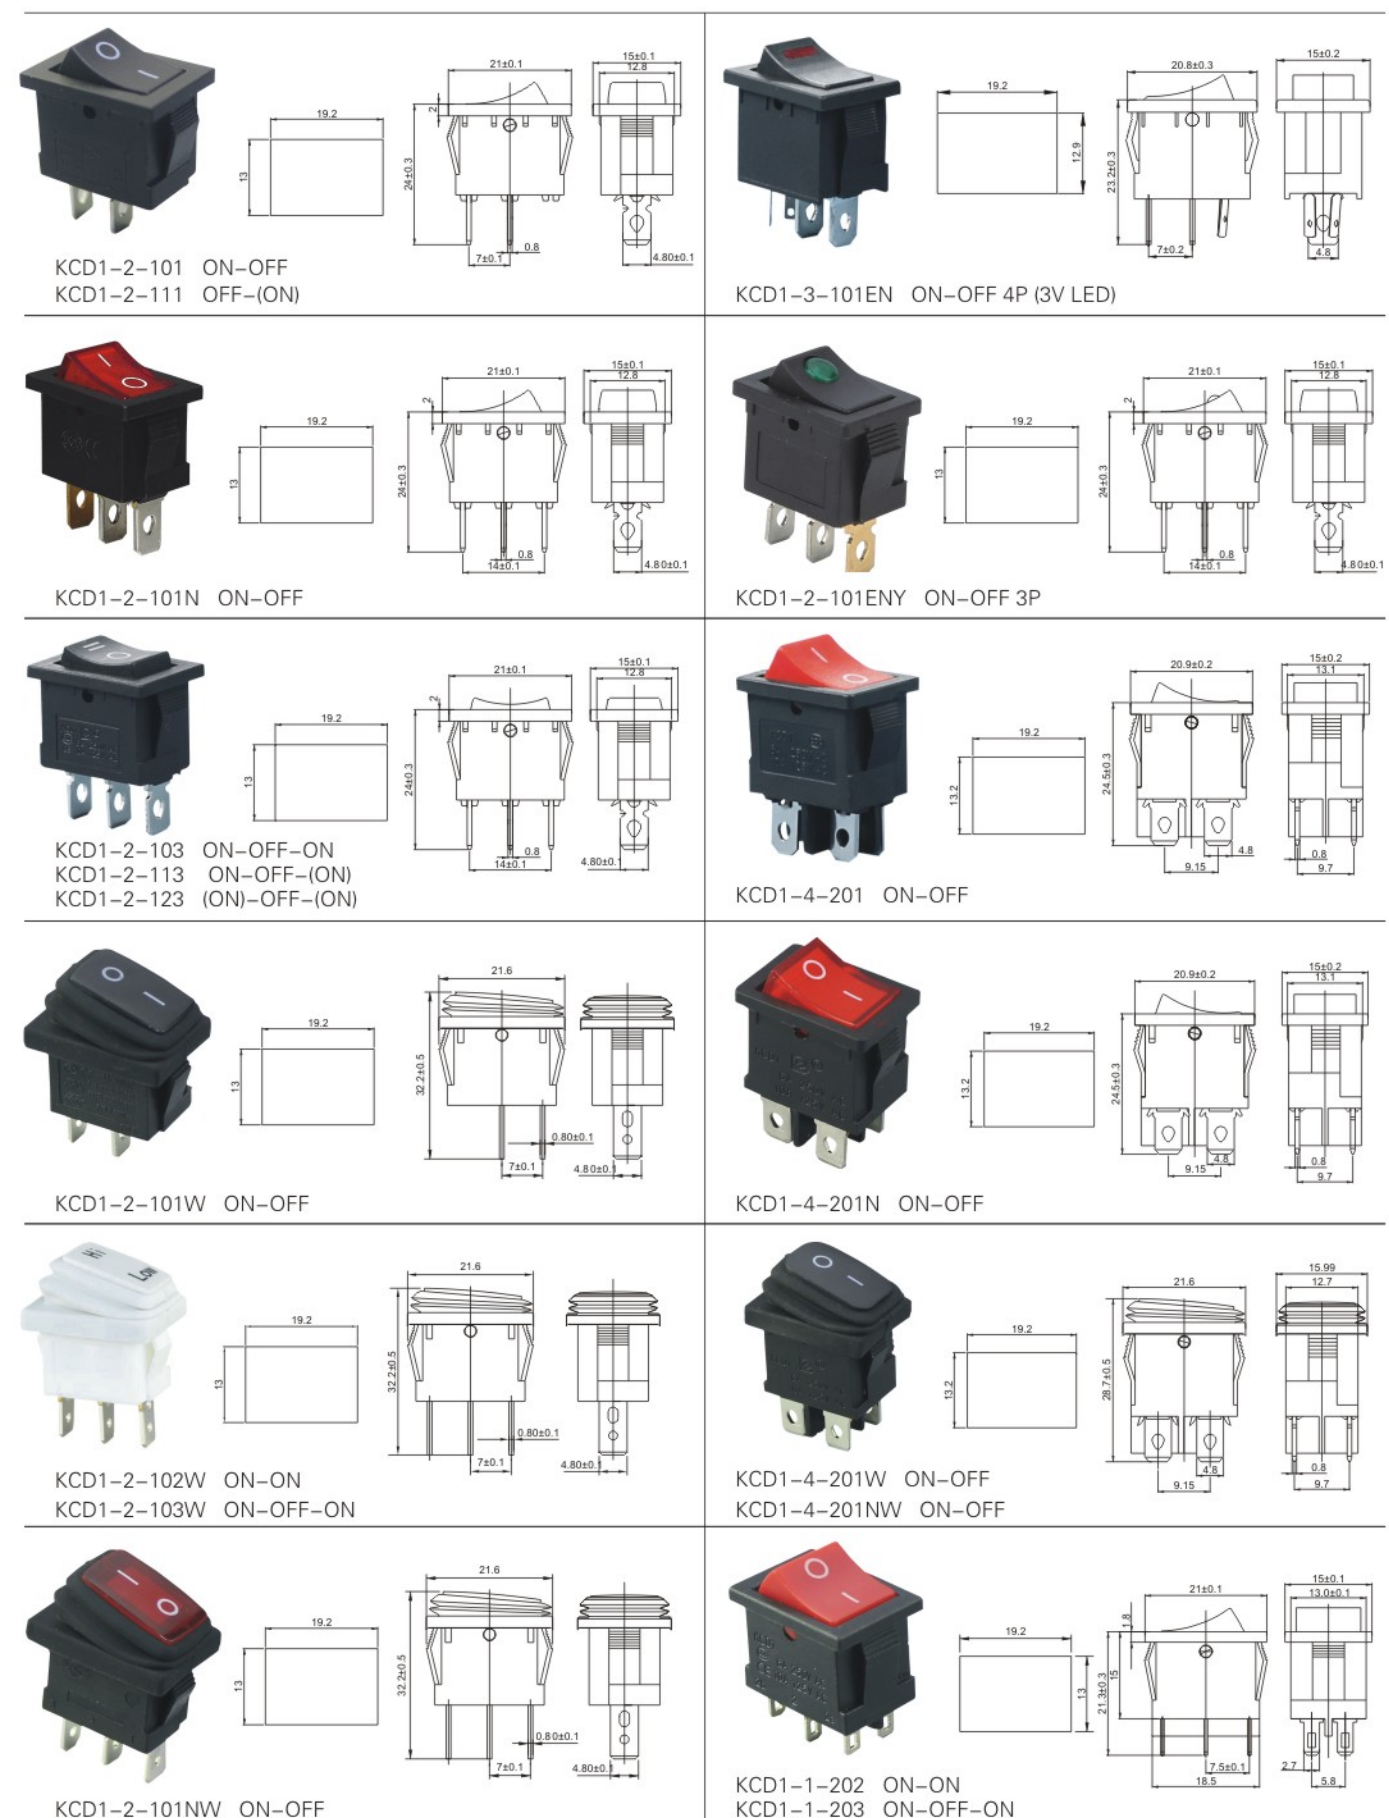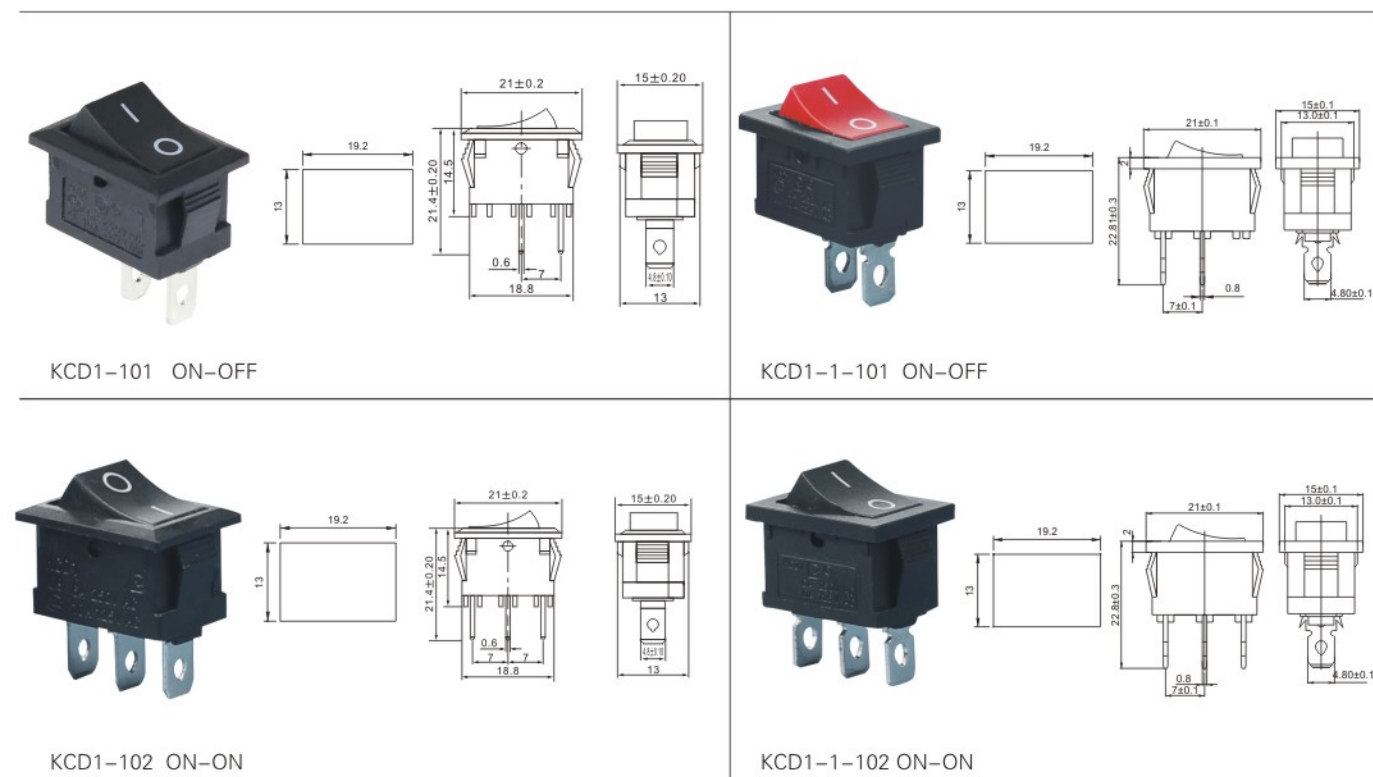

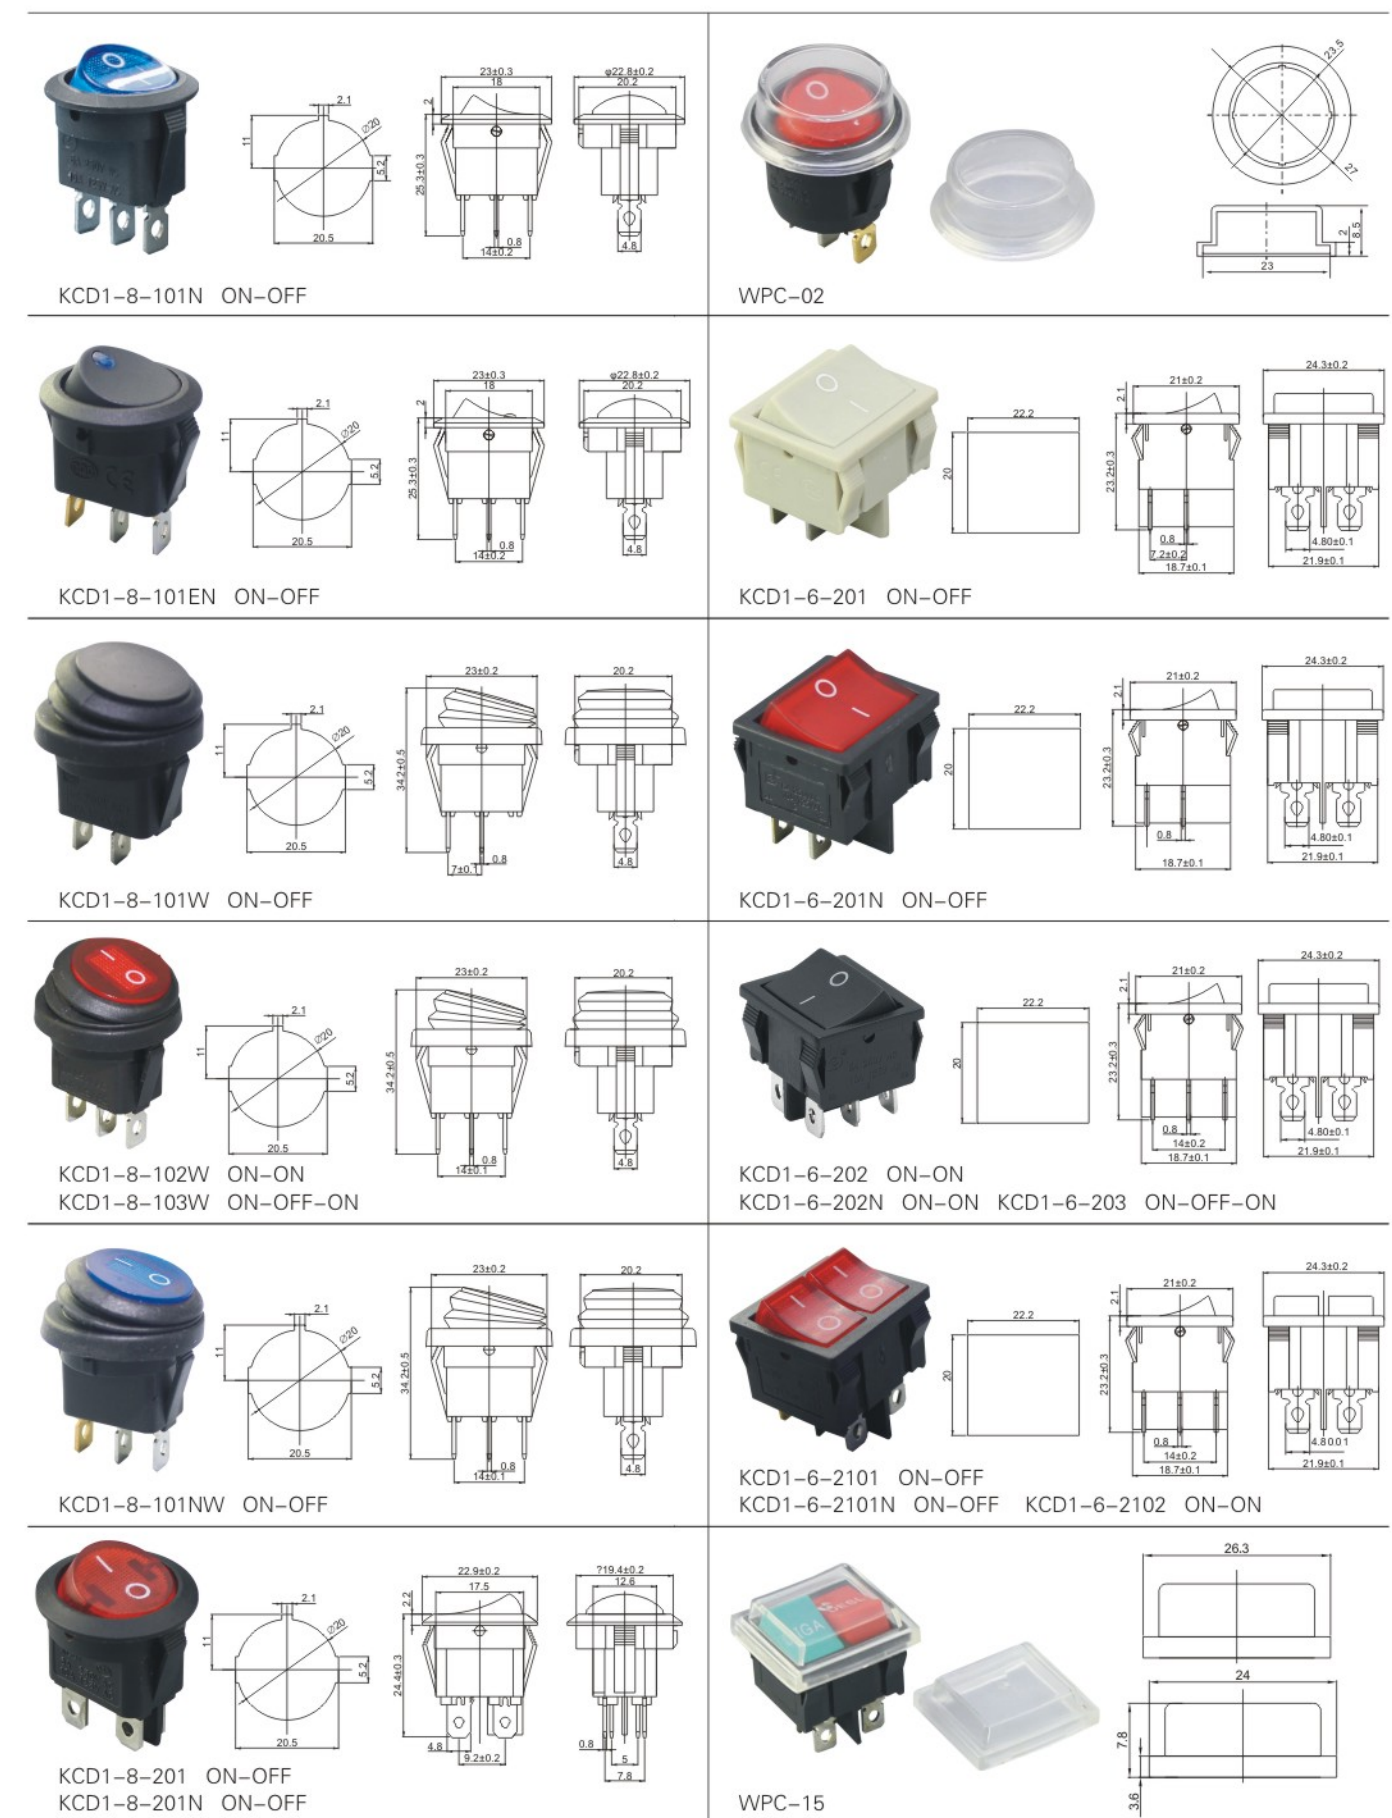

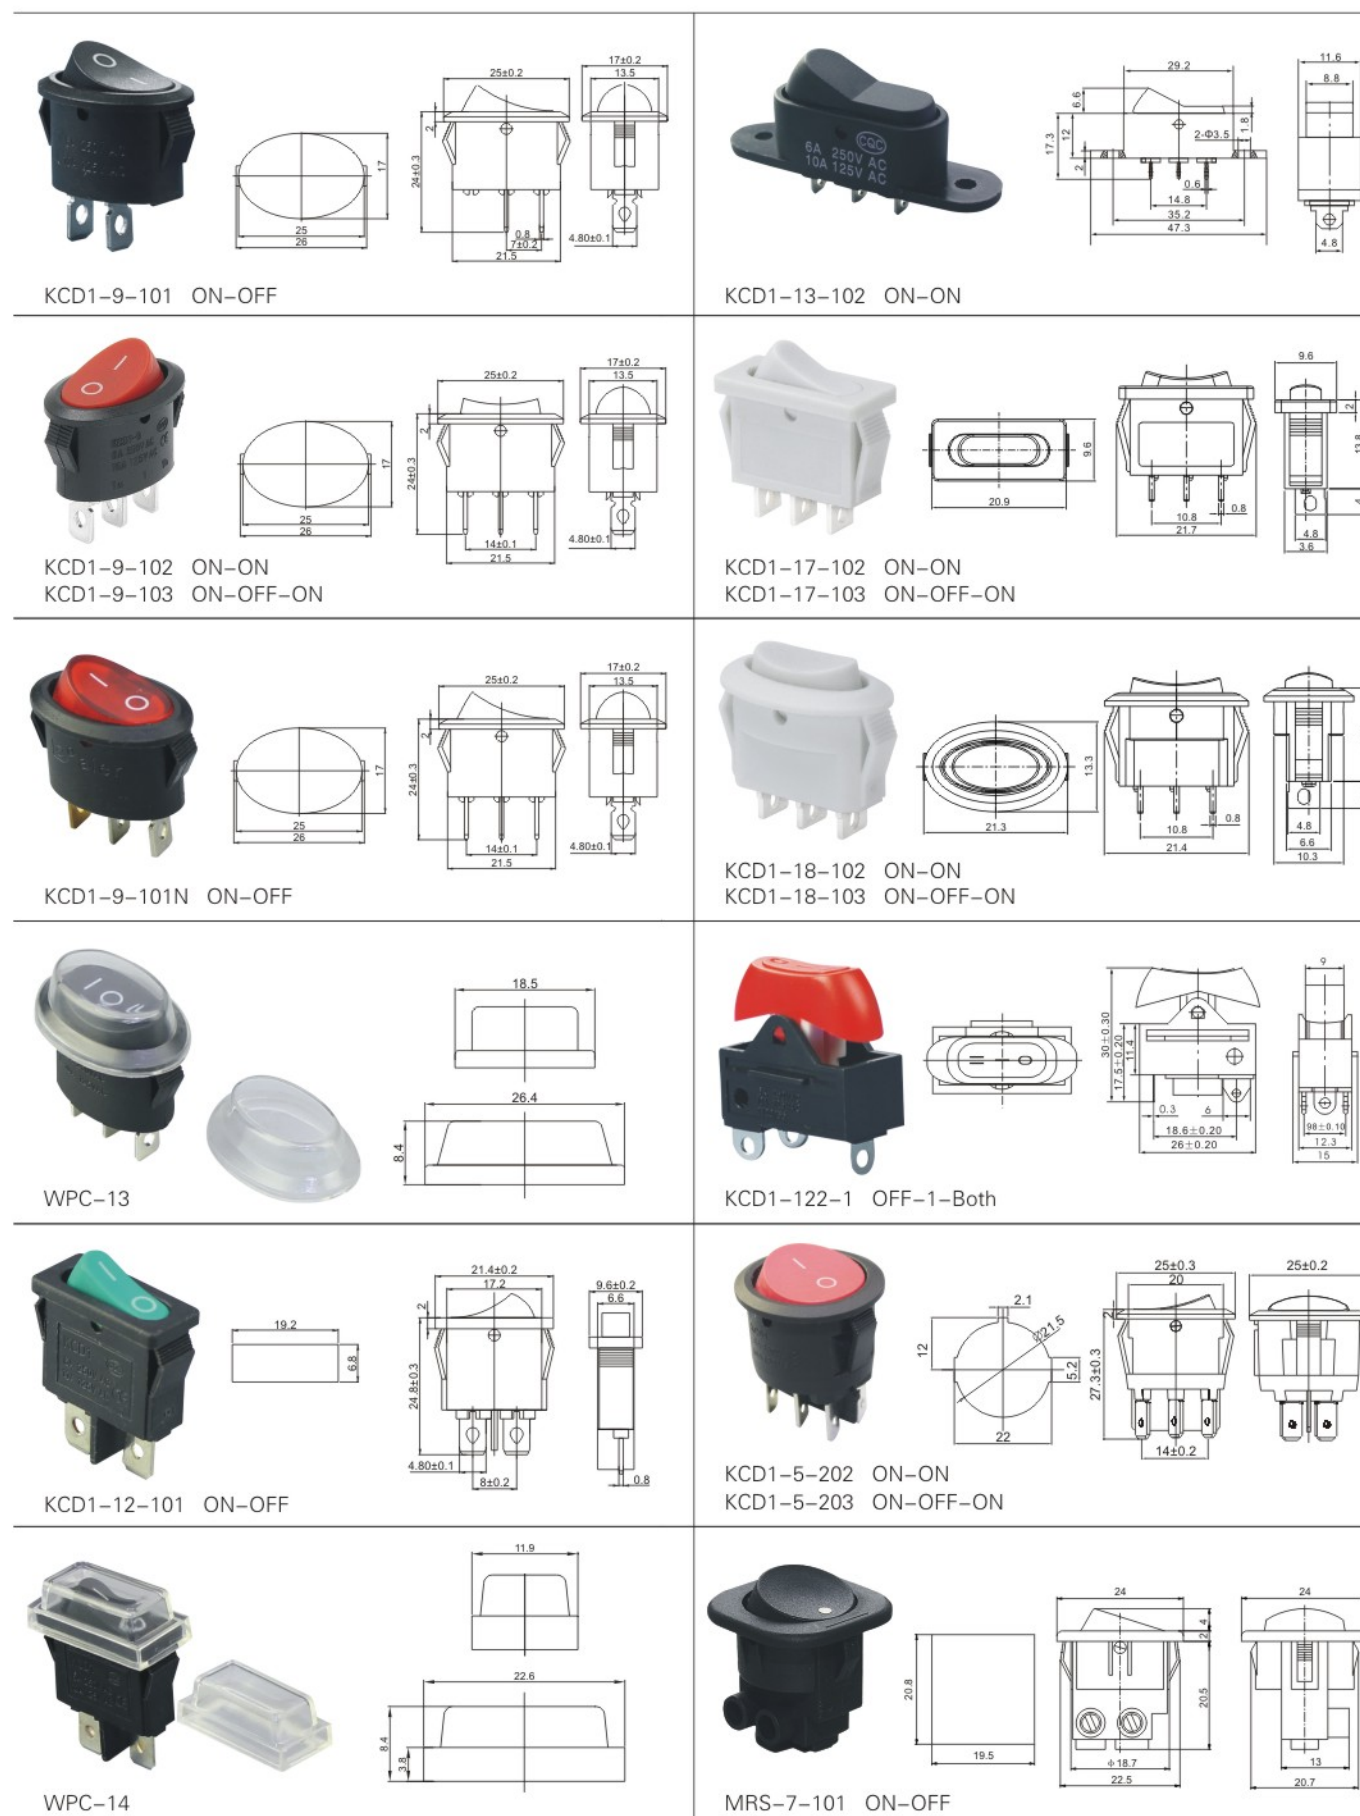

KCD3 Series Rocker Switch


技术特性 Specification









- 规格 Rating: 20A 125VAC; 15A 250VAC
- 接触电阻 Contact Resistance: 35mΩ max
- 绝缘电阻 Insulation Resistance: 500VDC 100MΩ min













- 耐电压 Dielectric Strength: 1500VAC, 1 Minute
- 操作温度 Operating Temperature: -25℃~ +85℃
- 电气寿命 Electrical Life: ≥10,000 Cycles


型号说明 Model Information

特征 Features	序号 Series	刀数 Poles	功能 Function	带灯状态 Lamp	按钮类型 Actuator	端子类型 Terminals	标记 Marking	按钮颜色 Actuator Color	外壳颜色 Housing Color	灯电压 Lamp Volt
1 Miniature	1 1 pole 1 button	01 ON-OFF	No Mark	No lamp	No Mark	Straight	C1	B 黑色Black	B 黑色Black	3V
2 Medium 2 poles	2 2 pole 1 button	02 ON-ON	N	Lens illuminated	W	Short	C2	W 白色White	W 白色White	6V
3 Medium 1 pole	21 2 pole 2 button	03 ON-OFF-ON	EN	Dot illuminated	H	Right Angle	C3	R 红色Red	R 红色Red	12V
5 Sub-Miniature	31 3 pole 3 button	11 (ON)-OFF(半复位)	No Mark	C shape	C	Screw	C4	G 绿色Green	G 绿色Green	24V
		12 (ON)-ON(半复位)	W	Waterproof	Y	Through hole	C5	BL 蓝色Blue	BL 蓝色Blue	48V
		13 (ON)-OFF-(ON)半复位	H	High Actuator	O		C6	O 棕色Orange	O 棕色Orange	110V
		23 (ON)-OFF-(ON)双复位	V	V shape	GR		C7	GR 灰色Gray	GR 灰色Gray	220V
					C		C8	C 棕色Brown	C 棕色Brown	
							C9			
							C10			

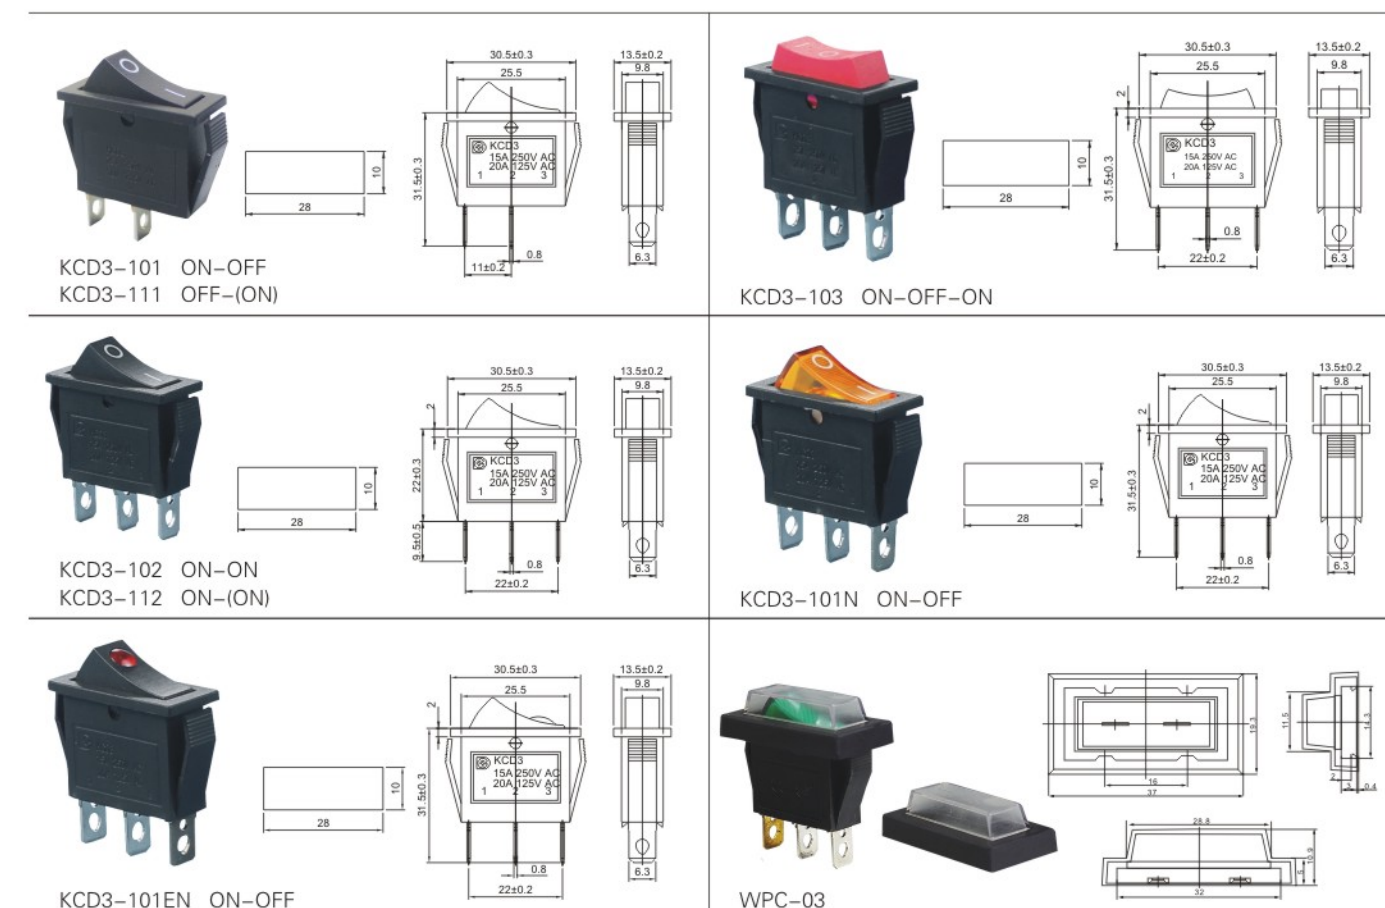

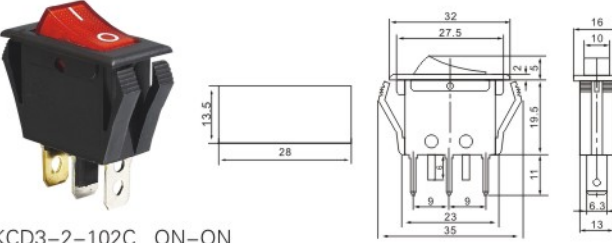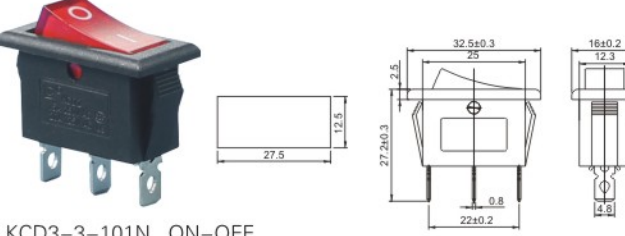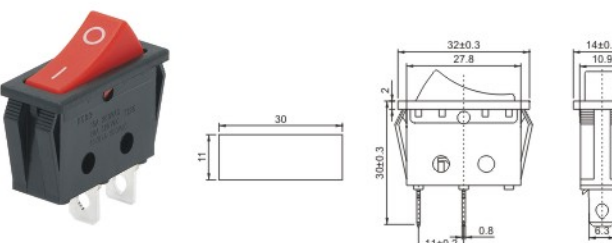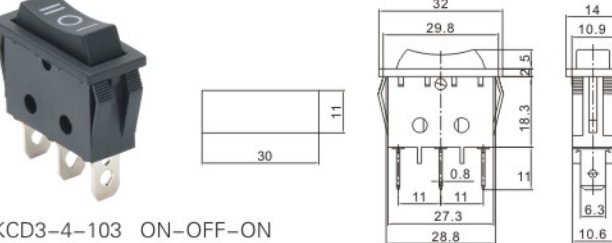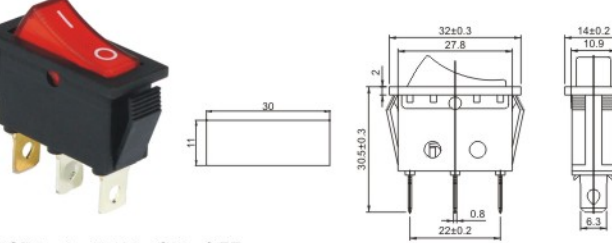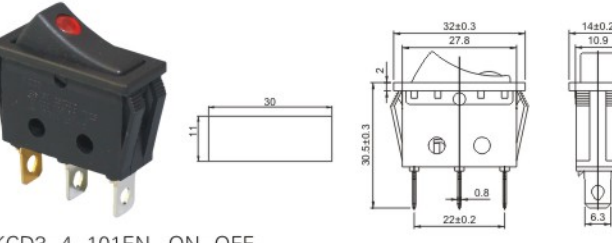
 KCD3-101W ON-OFF	 KCD3-2-102C ON-ON KCD3-2-101NC ON-OFF
 KCD3-103W ON-OFF-ON	 KCD3-3-101N ON-OFF
 KCD3-101NW ON-OFF KCD3-102W ON-ON	 KCD3-4-101 ON-OFF
 KCD3-2-101V ON-OFF KCD3-2-102V ON-ON	 KCD3-4-103 ON-OFF-ON KCD3-4-123 (ON)-OFF-(ON)
 KCD3-2-101NV ON-OFF	 KCD3-4-101N ON-OFF
 KCD3-2-101C ON-OFF	 KCD3-4-101EN ON-OFF

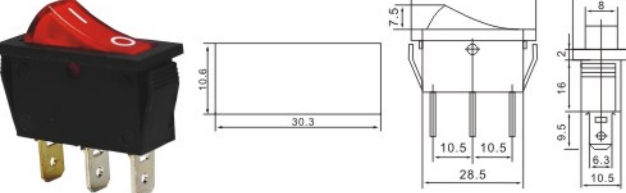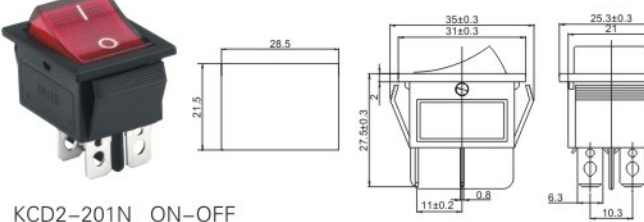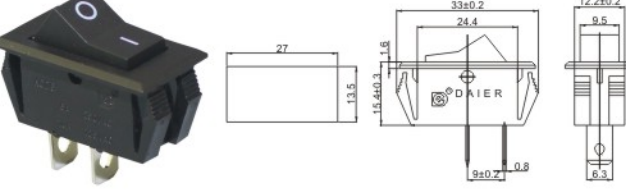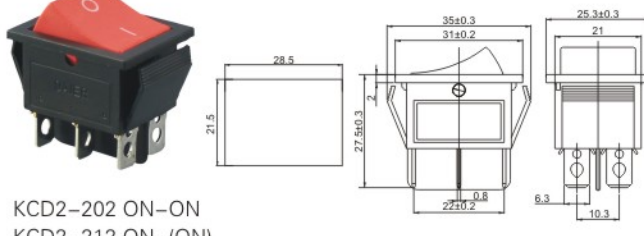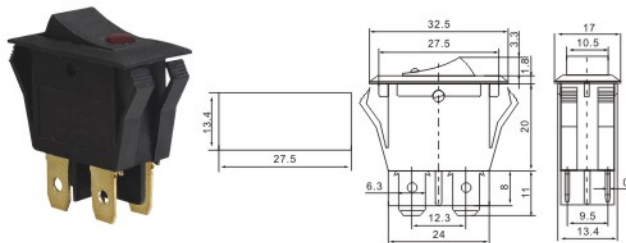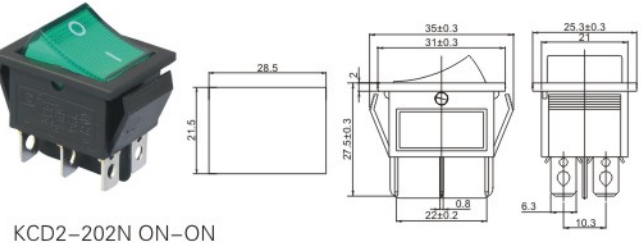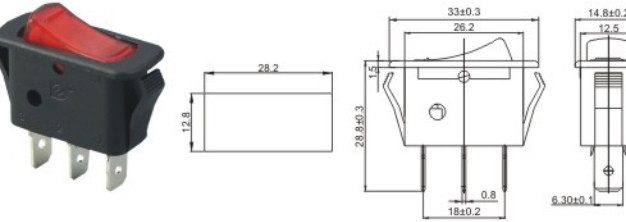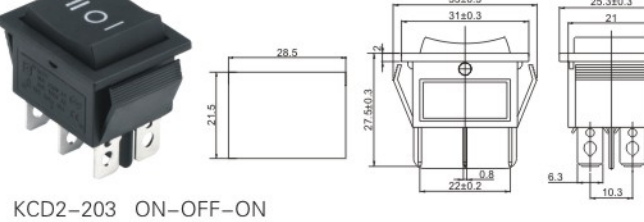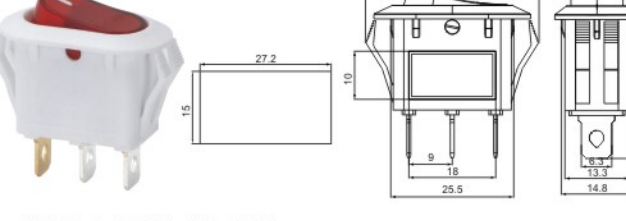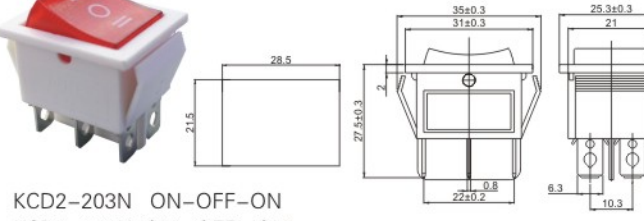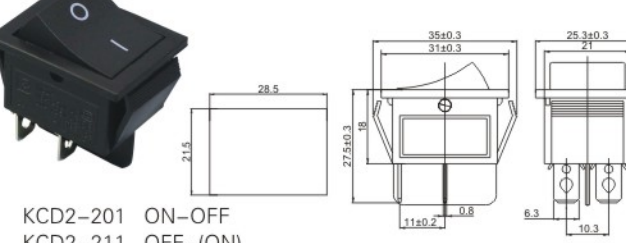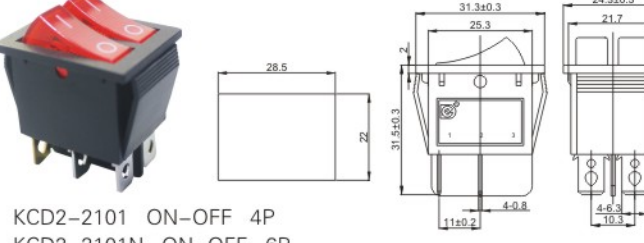 KCD3-5-101N ON-OFF	 KCD2-201N ON-OFF KCD2-211N OFF-(ON)
 KCD6-101 ON-OFF	 KCD2-202 ON-ON KCD2-212 ON-(ON)
 KCD3-11-201EN ON-OFF	 KCD2-202N ON-ON KCD2-212N ON-(ON)
 KCD3-12-101N ON-OFF	 KCD2-203 ON-OFF-ON KCD2-213 ON-OFF-(ON) KCD2-223 (ON)-OFF-(ON)
 KCD3-9-101N ON-OFF	 KCD2-203N ON-OFF-ON KCD2-223N (ON)-OFF-(ON)
 KCD2-201 ON-OFF KCD2-211 OFF-(ON)	 KCD2-2101 ON-OFF 4P KCD2-2101N ON-OFF 6P

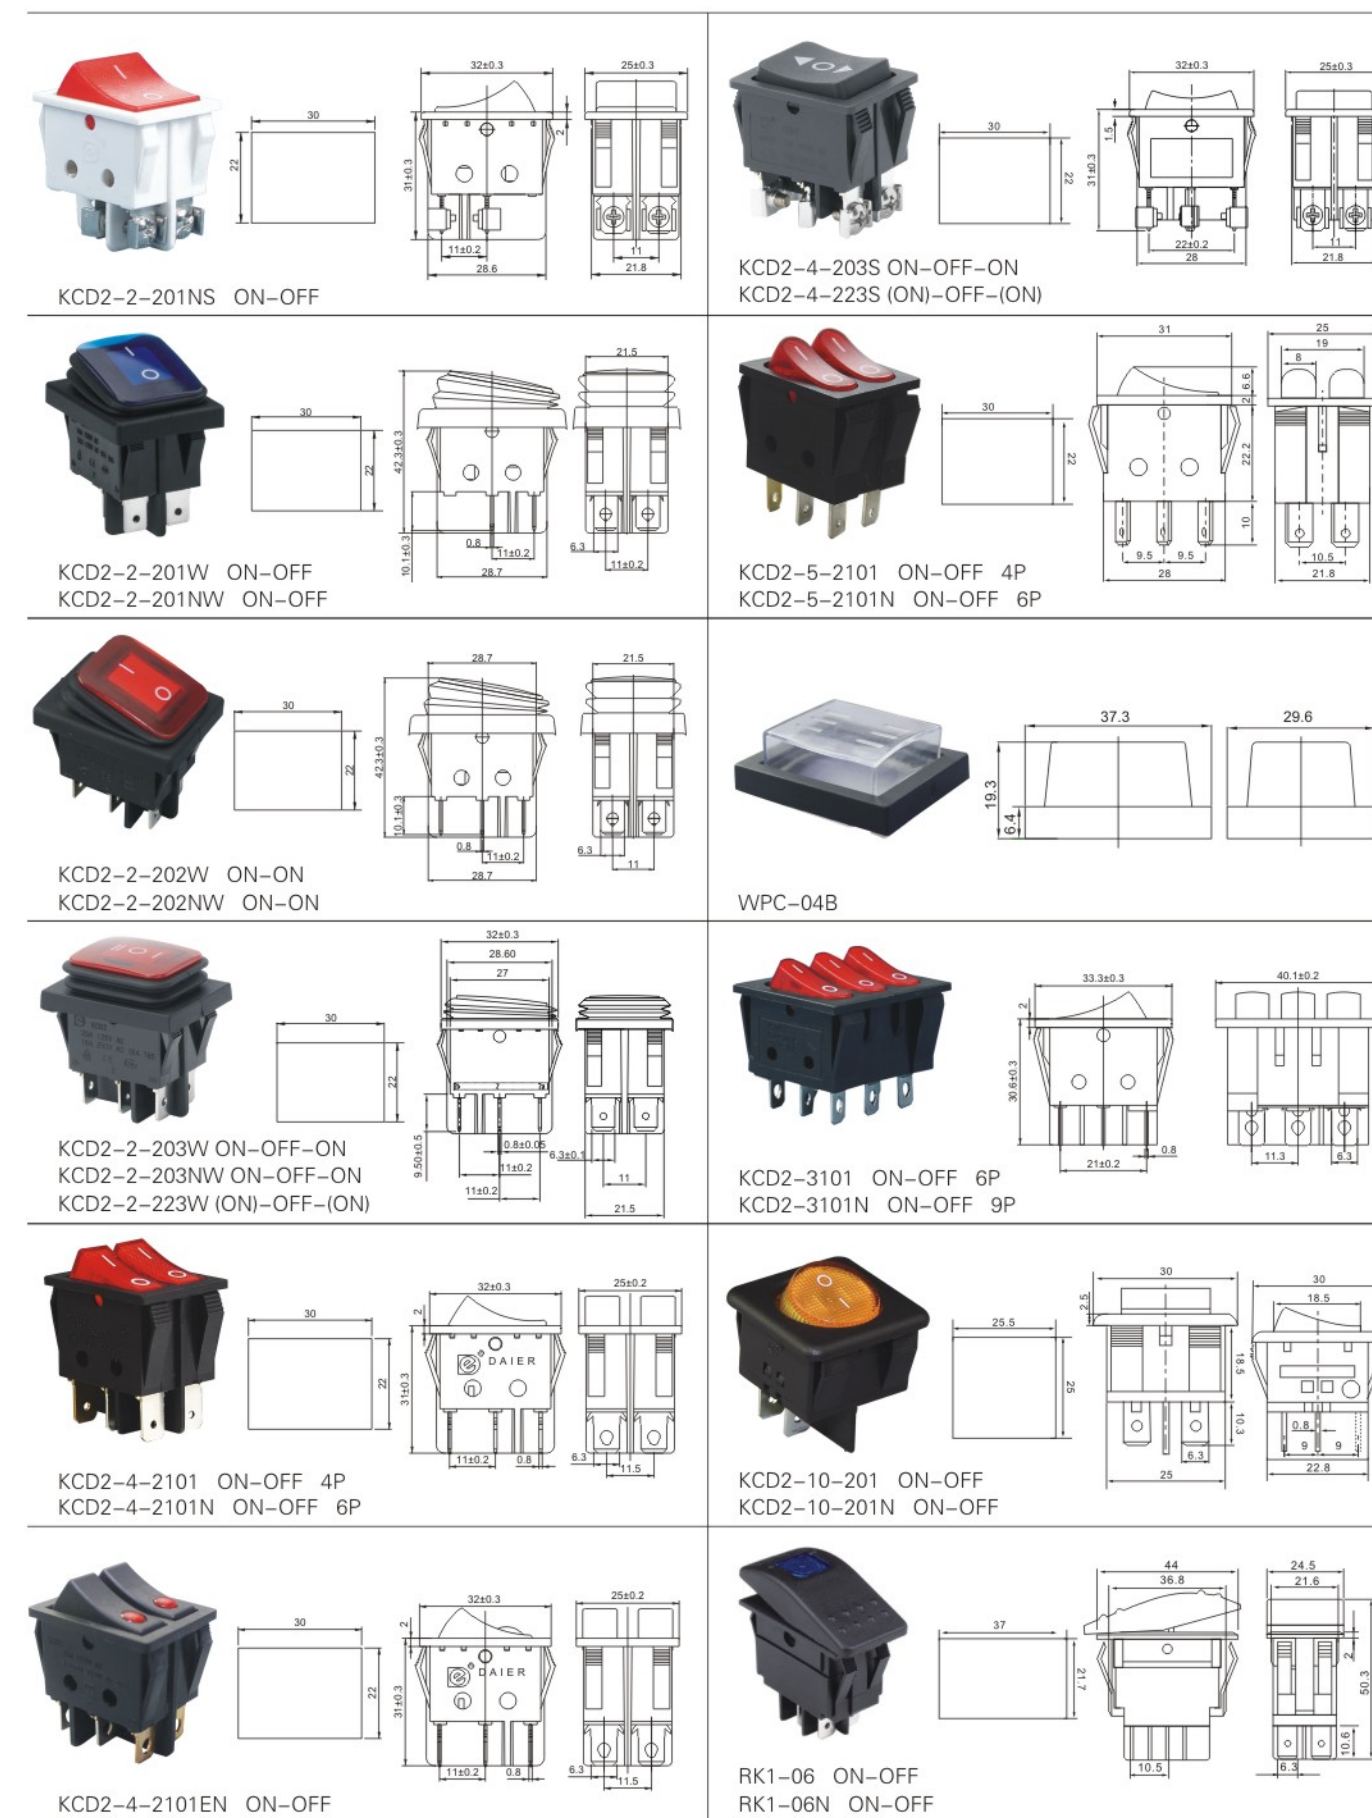





DS-402 OFF-(ON)
0.5A 125VAC

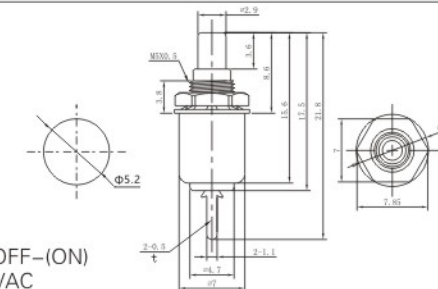


DS-314 OFF-(ON)
DS-315 ON-(OFF)
0.5A 250VAC

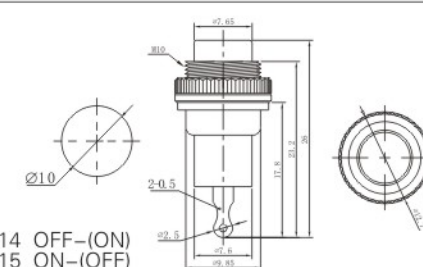


DS-612 ON-ON
DS-613 ON-(ON)
2A 250VAC; 5A 125VAC

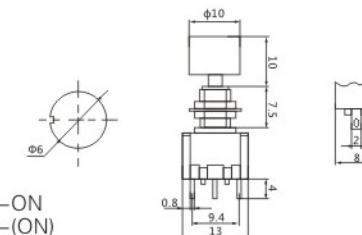


DS-316 OFF-(ON)
0.5A 250VAC

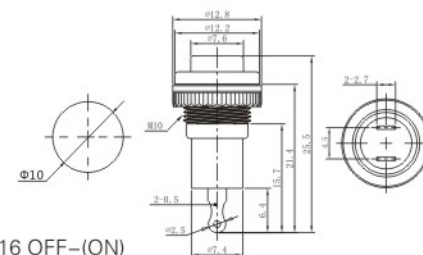


DS-622 ON-ON
DS-623 ON-(ON)
2A 250VAC; 5A 125VAC

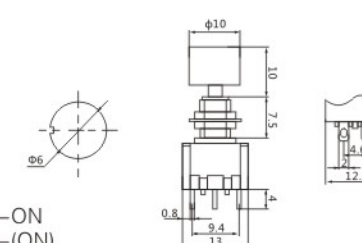


DS-318 OFF-(ON)
1A 250VAC

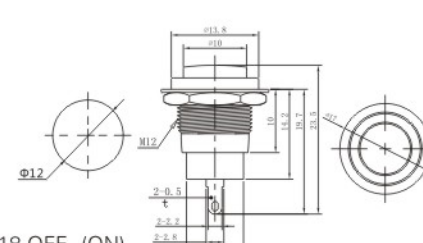


KAX-3 OFF-(ON)
0.5A 250VAC

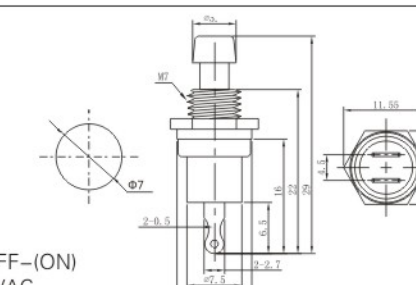


PBS-13B OFF-(ON)
PBS-13C ON-(OFF)
4A 250VAC

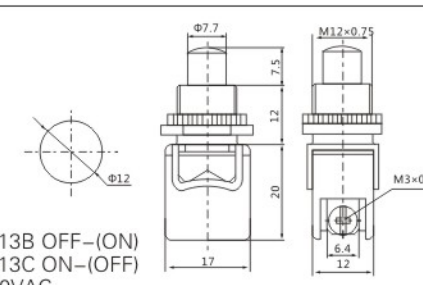


PBS-105 OFF-(ON)
PBS-105C ON-(OFF)
0.5A 250VAC

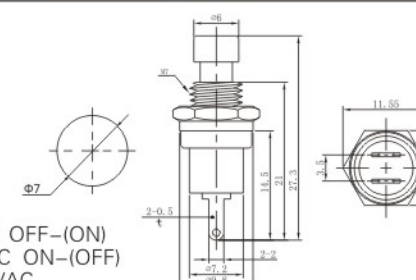


PBS-16A ON-OFF
PBS-16B OFF-(ON)
1A 250VAC


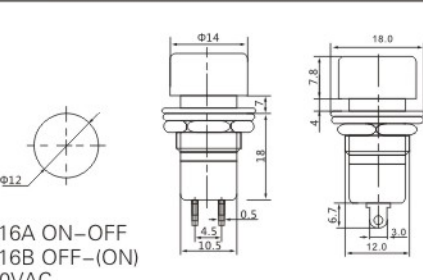




DS-101 OFF-(ON)
0.5A 125VAC

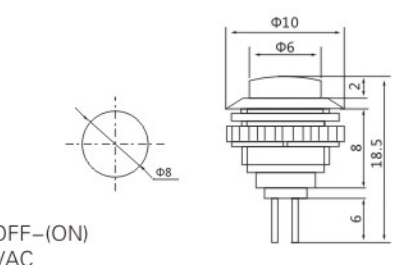


DS-212 OFF-(ON)
3A 250VAC


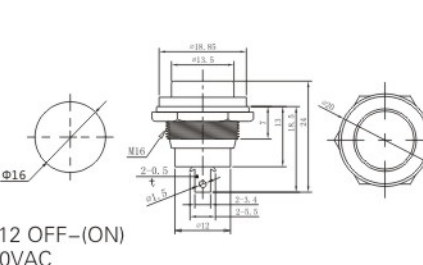


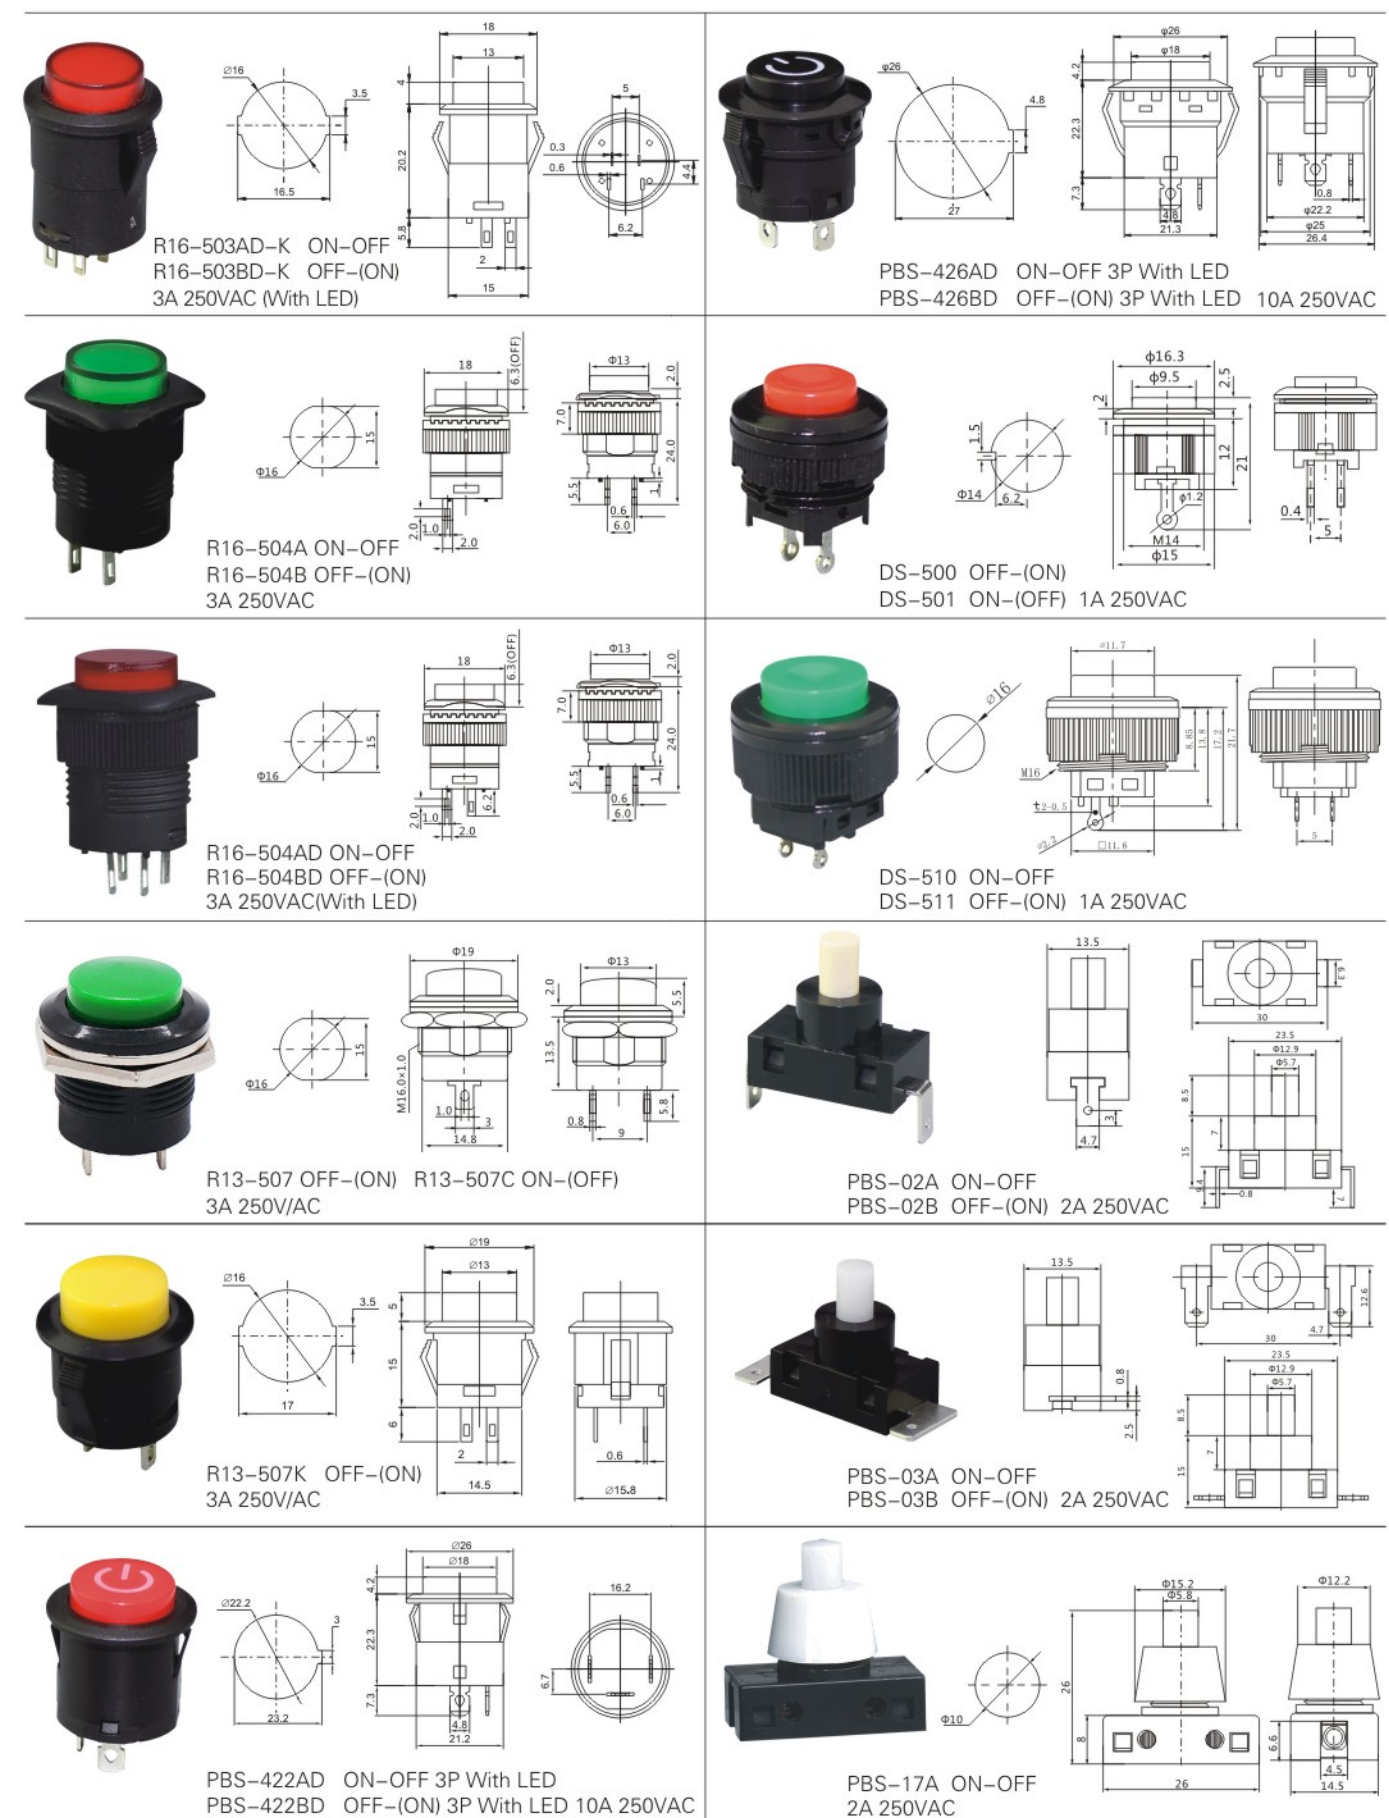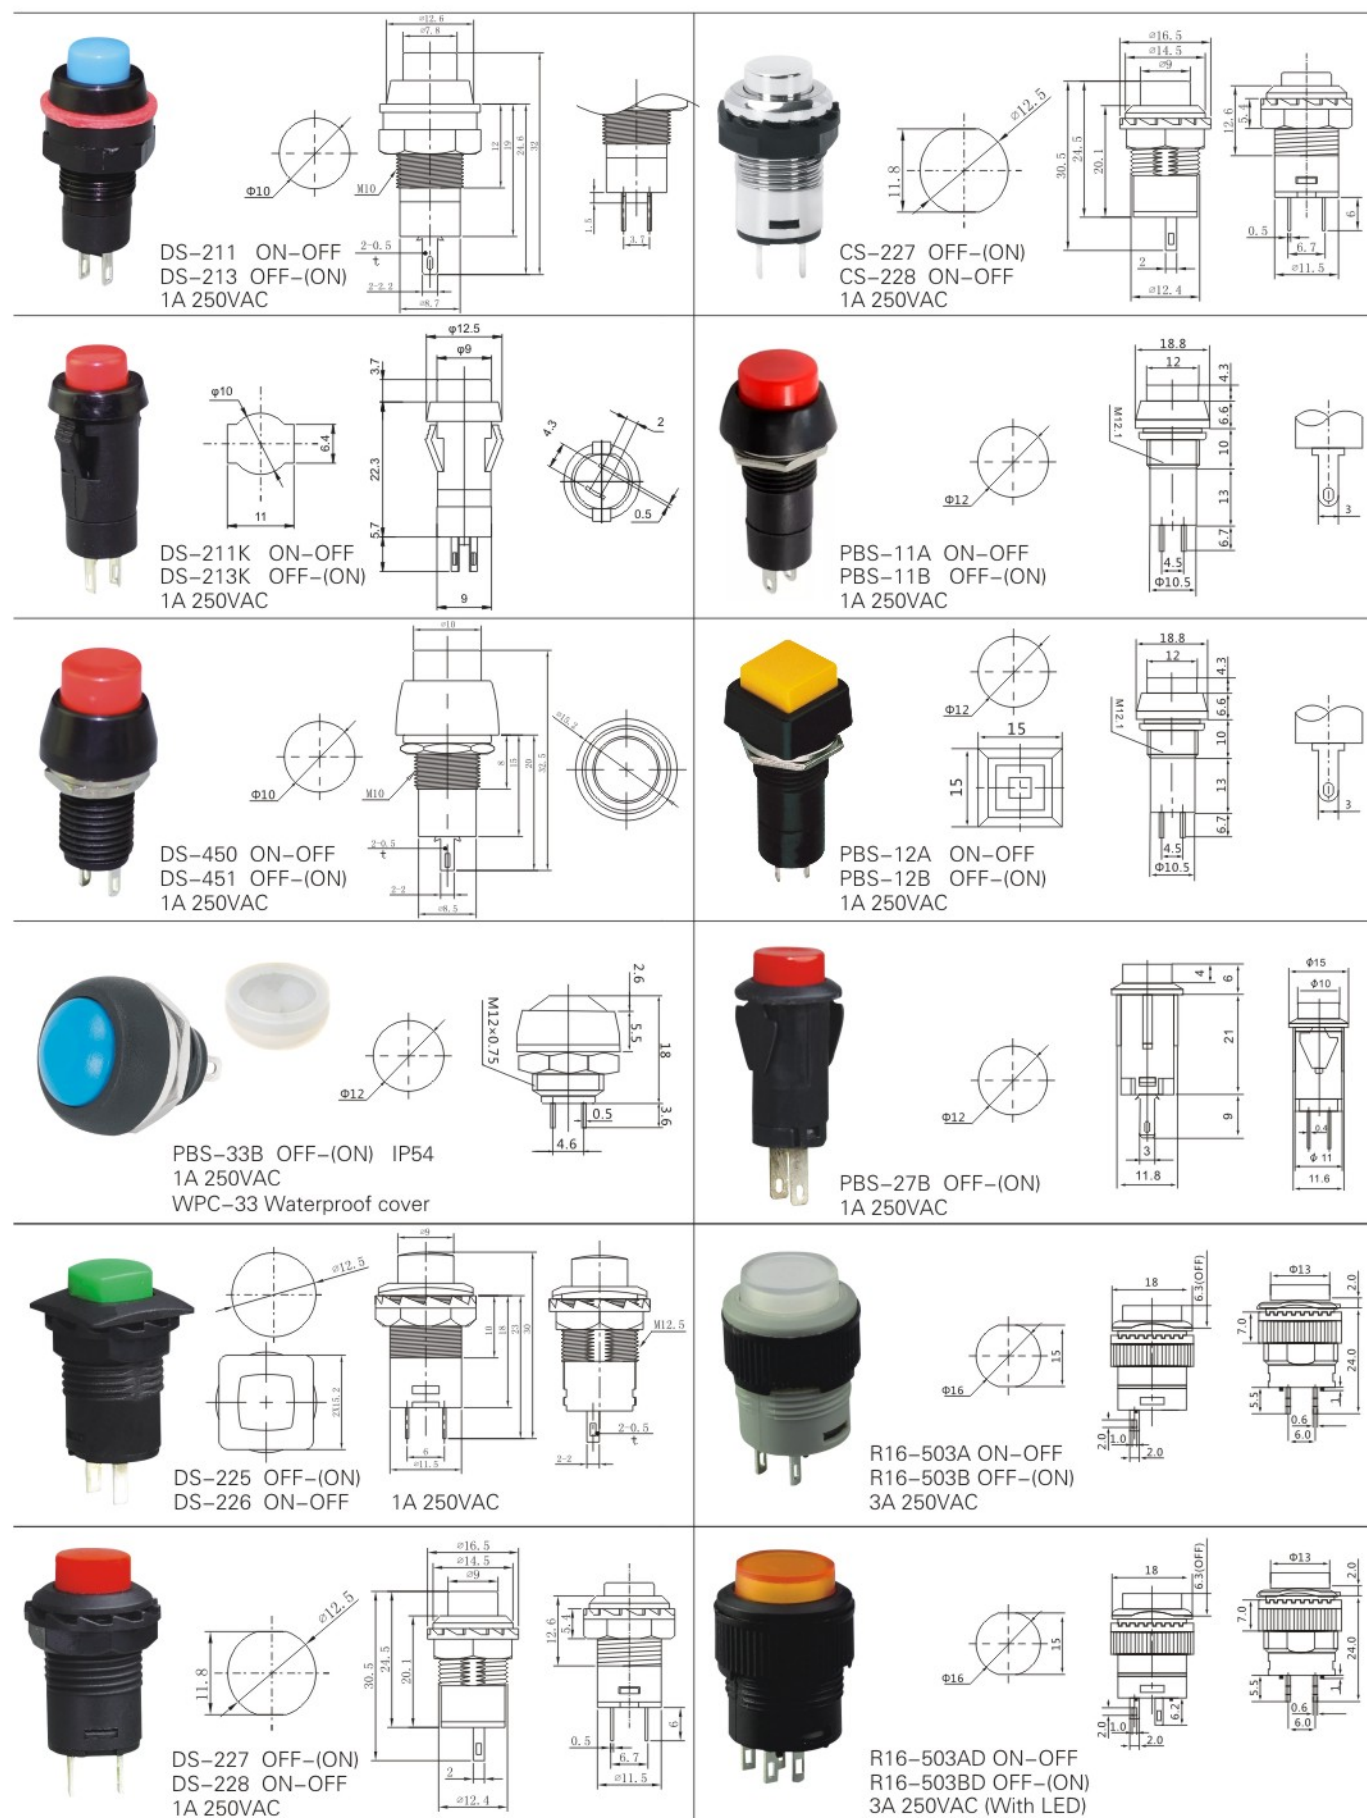

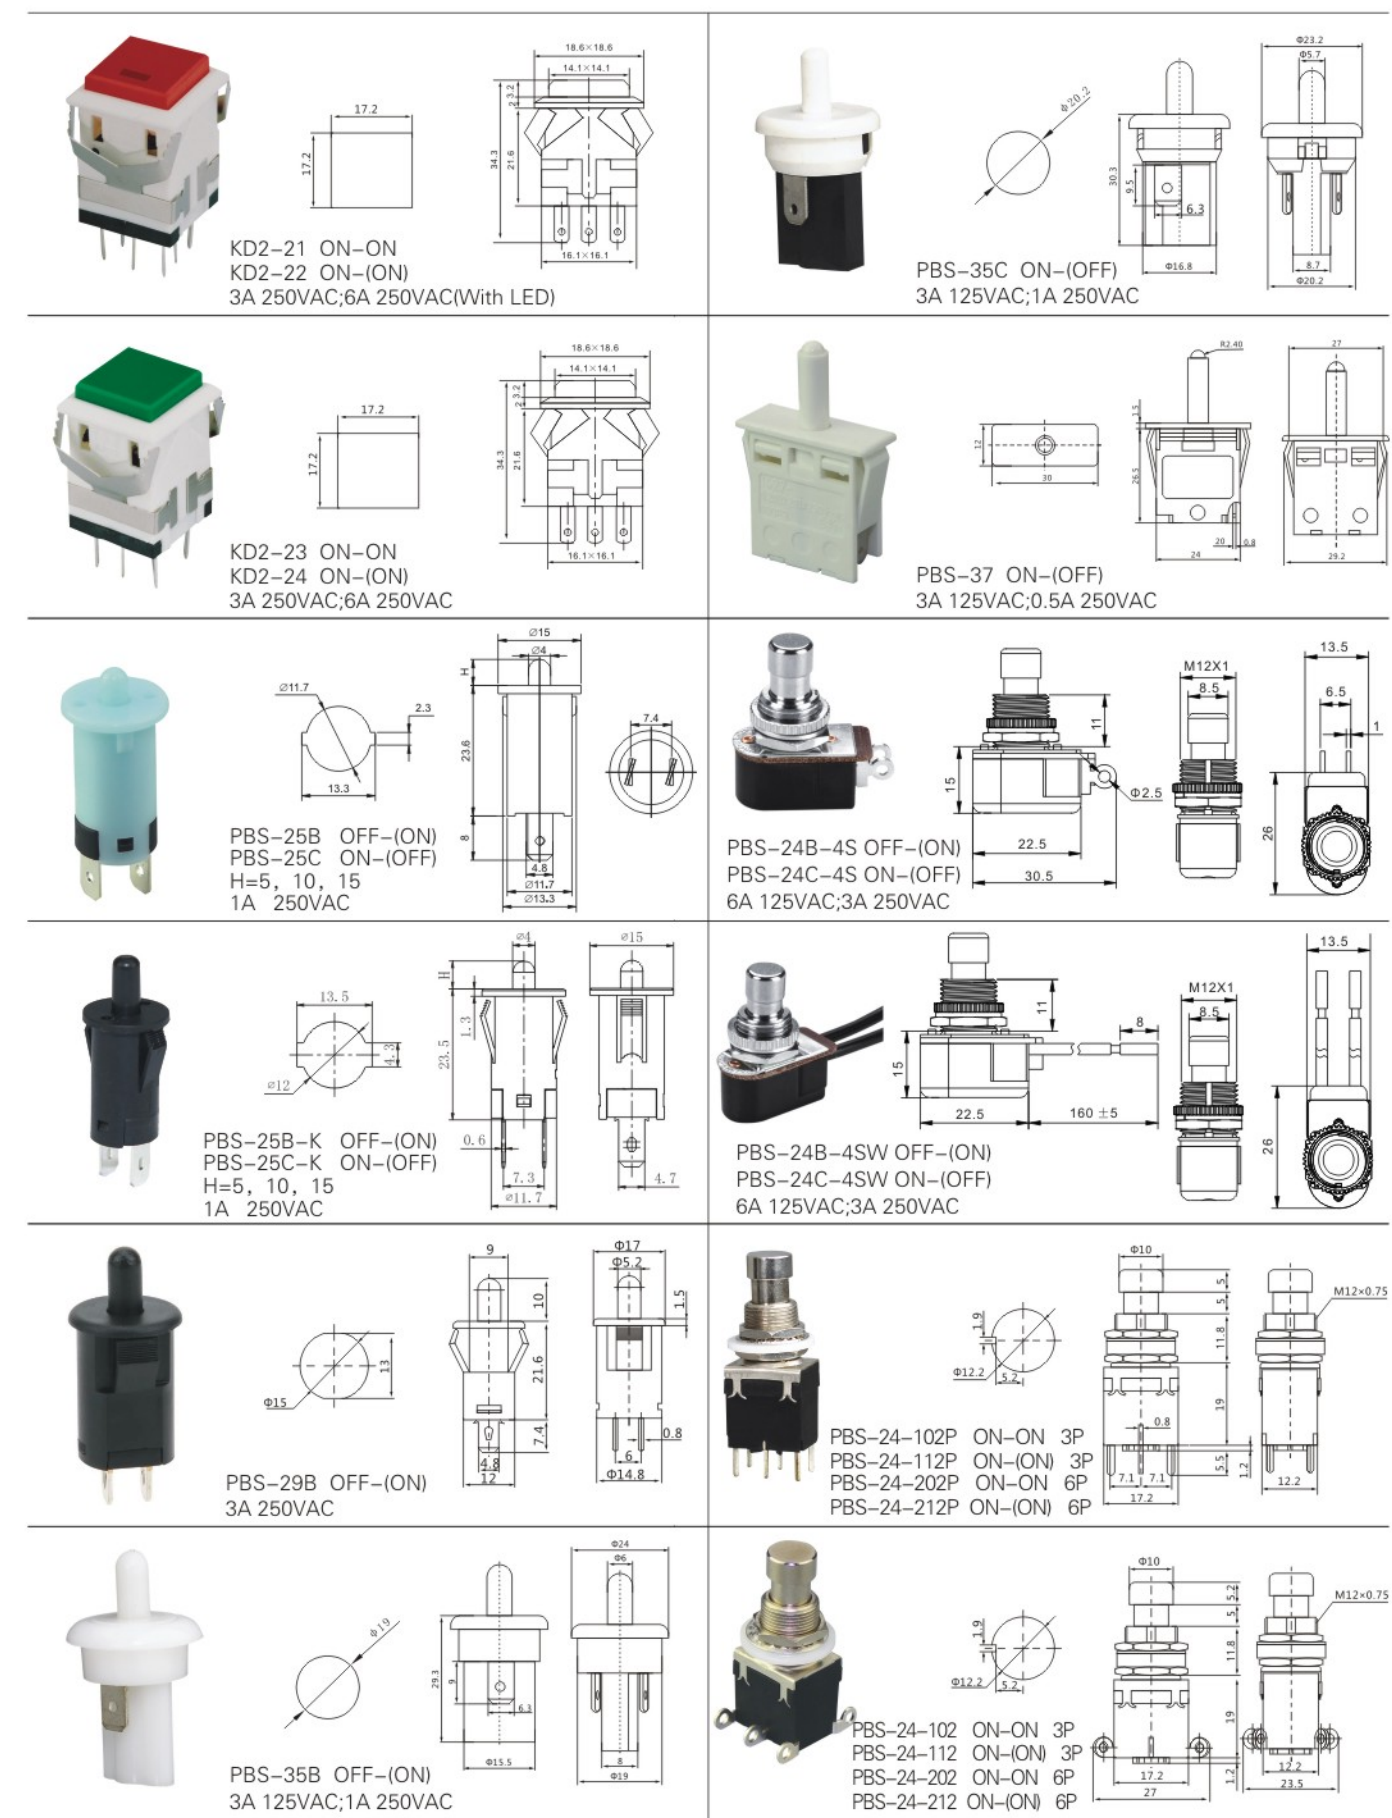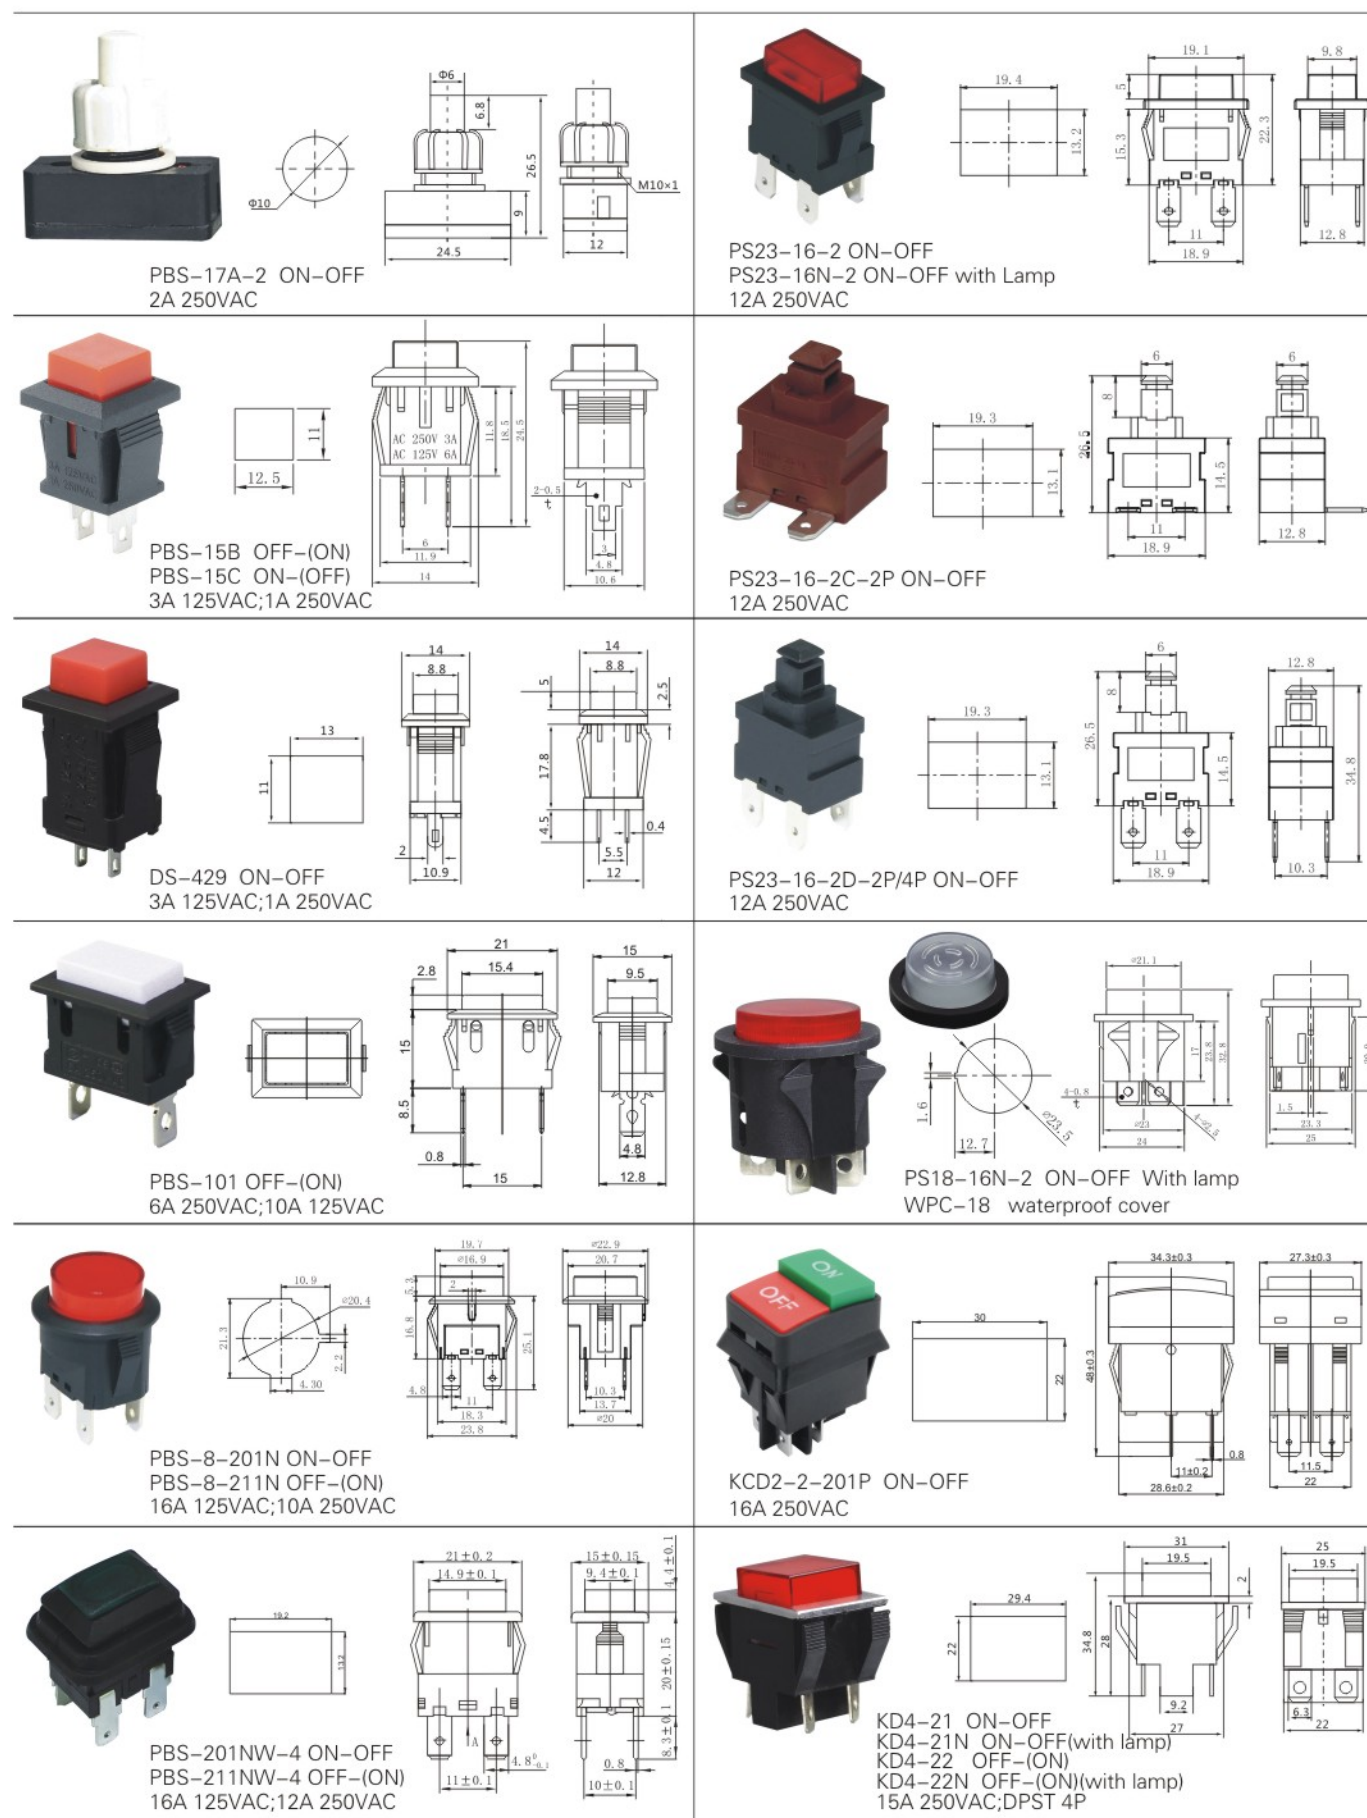



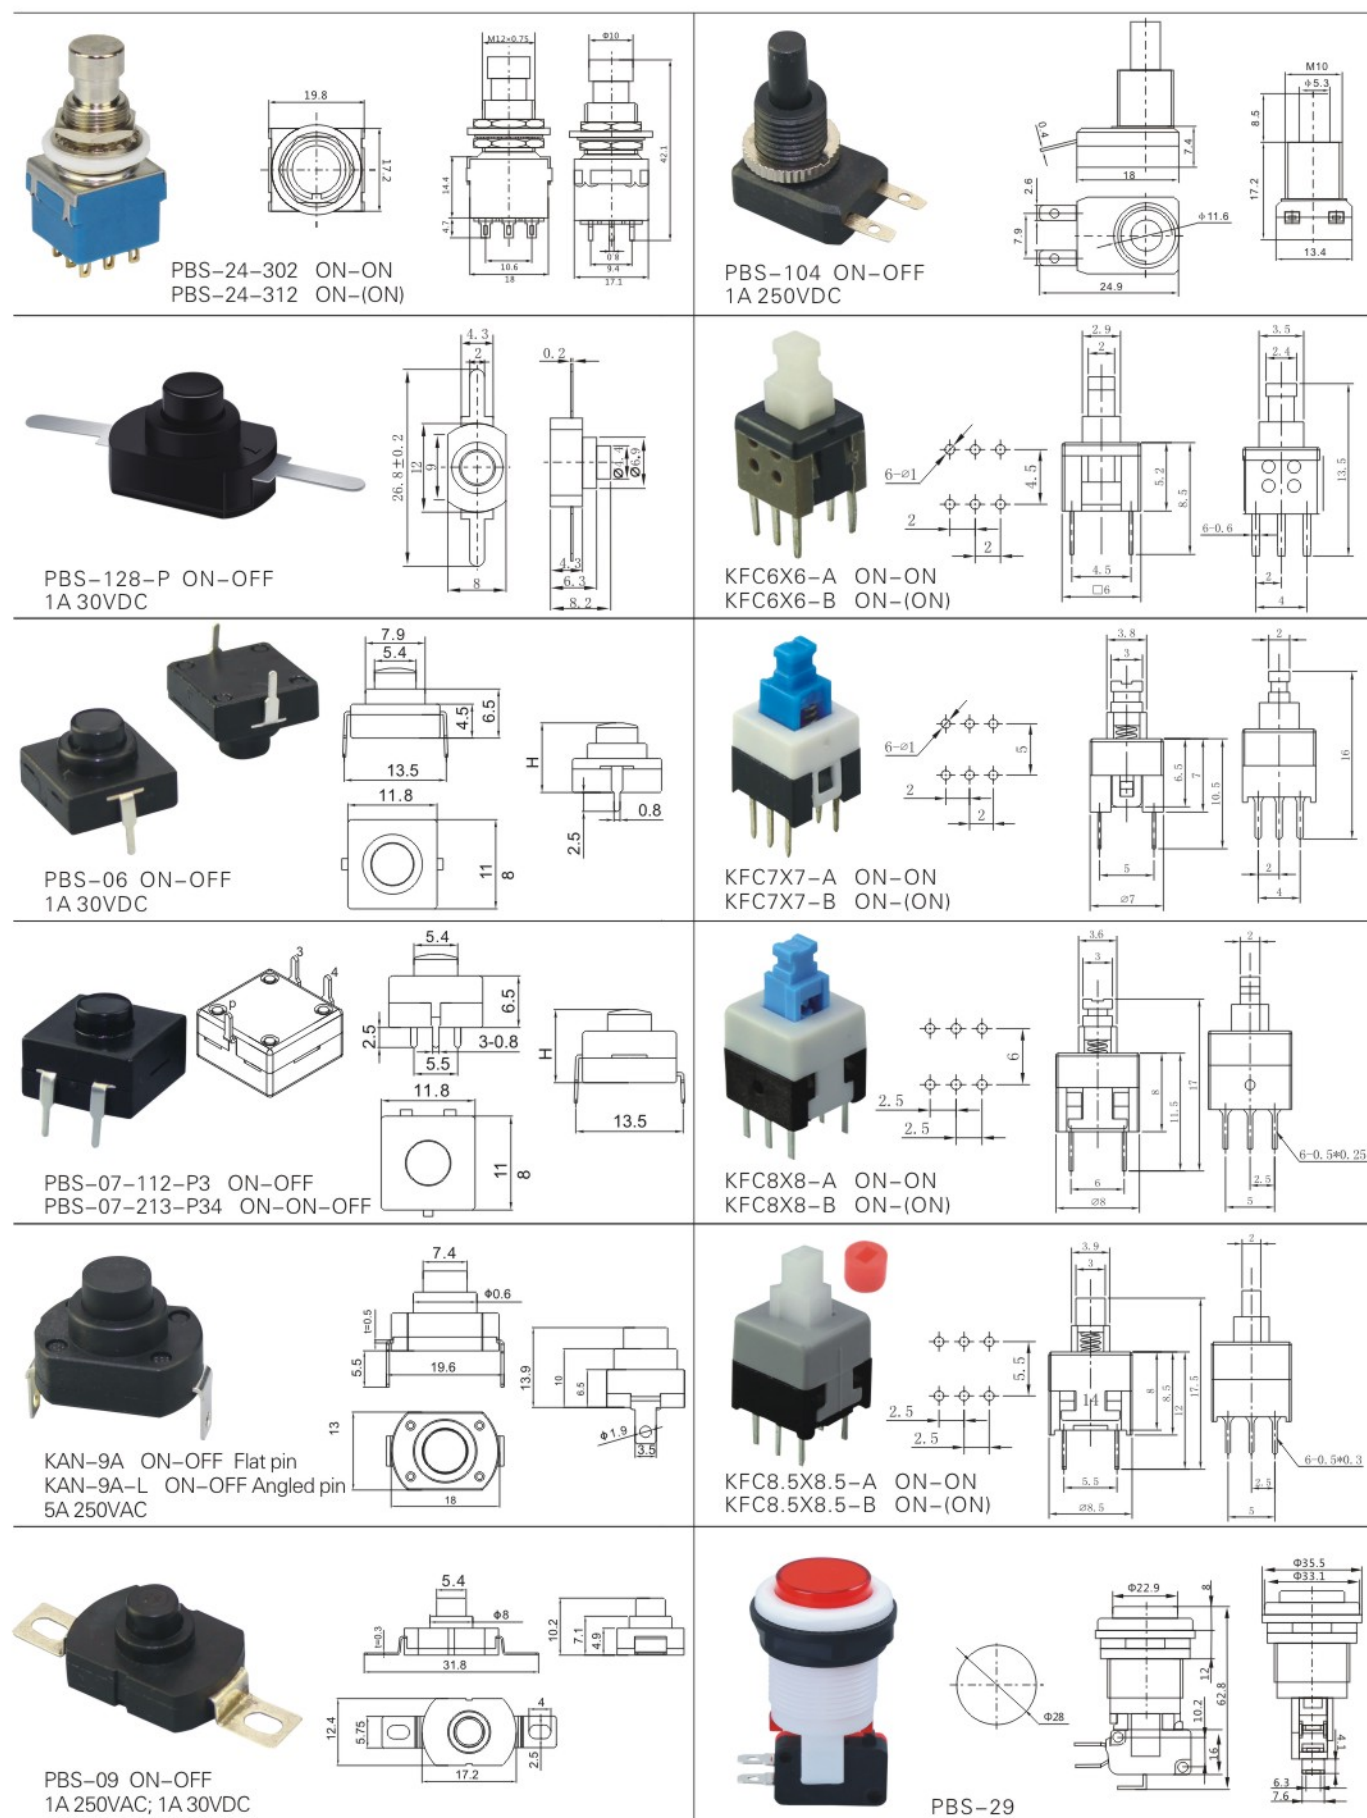


A Series Plastic Push Button

A	16	-	11	S	Y	-	N	-	□	R	12V
塑料型 Series	尺寸 Mounting Size		刀数 Poles	功能 Function	形状 shape		灯 LED		外壳颜色 Housing Color	按钮颜色 Actuator Color	灯电压 LED Volt
A12			11 1 NO 1NC 20 2NC 22 2NO 2NC 10 1NC	Y:圆形 Round F:正方形 Square J:长方形 Rectangle R:急停 Emergency M:蘑菇形 mushroom X:旋转形 Rotary type Z:自锁 Latching)		No LED E Ring illuminated P Laser Power Logo EP Laser Power Logo+Ring N Lens illuminated S Custom Laser Symbol	黑色Black S 银色Silver	R 红色Red G 绿色Green Y 黄色Yellow B 蓝色Blue W 白色White A 黑色Black S 银色Silver	3V 6V 12V 24V 48V 110V 220V		
A16											

			
A12-11SY; A12-11SY-N ON-(ON) A12-11ZY; A12-11ZY-N ON-(ON)	A16-11SJ-N ON-(ON) A16-11ZJ-N ON-(ON)	A16-11ZK2 ON-ON 3P A16-22ZK2 ON-ON 6P A16-22ZK3 ON-OFF-ON 6P	A22-11SY-N-SΔ ON-(ON) A22-11ZY-N-SΔ ON-(ON)
			
A12-11SF; A12-11SF-N ON-(ON) A12-11ZF; A12-11ZF-N ON-(ON)	A16-11SM ON-(ON) A16-11ZM ON-(ON)	A16-BZ Buzzer 蜂鸣器	A22-11SY-EP-SS ON-(ON) A22-11ZY-EP-SS ON-(ON)
			
A16-11SY; A16-11SY-N ON-(ON) A16-11ZY; A16-11ZY-N ON-(ON)	A16-11SR SPDT A16-22SR DPDT	A16-10SR-F SPST A16-20SR-F DPST	S01 Square S02 Rectangle
			
A16-22SF-N ON-(ON) A16-22ZF-N ON-(ON)	A16-11ZX2 ON-ON 3P A16-22ZX2 ON-ON 6P A16-22ZX3 ON-OFF-ON 6P	A16-10SR-B SPST A16-20SR-B DPST	Wiring Harness



IP67 Series Plastic Push Button




L	19	F	-	11	E	L	□	-	S	R	-	R	12V
塑料型 SERIES	尺寸 Mounting Dia.	按钮形状 Button Shape		接触方式 Contact Mode	灯 LED	开关功能 Function	类别 Tape		外壳颜色 Housing Color	按钮颜色 Actuator Color		LED颜色 LED Color	LED电压 LED VOLT
L12	13.7X30	F Flat Round H High Round		10 1NO 11 1NO1NC 22 2NO2NC		M Momentary L Latching			A 黑色Black S 银色Silver	R 红色Red G 绿色Green Y 黄色Yellow B 蓝色Blue W 白色White A 黑色Black S 银色Silver		Same as button R 红色Red G 绿色Green Y 黄色Yellow B 蓝色Blue W 白色White A 黑色Black S 银色Silver	3V 6V 12V 24V 48V 110V 220V
L16													
L19													
L22													
L25	28X35												





		
L12F-10M 2P OFF-(ON) L12F-10L 2P ON-OFF L12F-10NM 4P OFF-(ON) L12F-10NL 4P ON-OFF	L19F-11M 3P ON-(ON) L19F-11L 3P ON-ON L19F-11NM ON-(ON) L19F-11NL ON-ON	L22F-11M 3P ON-(ON) L22F-11L 3P ON-ON L22F-11NM ON-(ON) L22F-11NL ON-ON
		
L16F-11M 3P ON-(ON) L16F-11L 3P ON-ON L16F-11NM 5P ON-(ON) L16F-11NL 5P ON-ON	L19F-11EPM5P ON-(ON) L19F-11EPL 5P ON-ON L19F-11EPM6P Dual LED L19F-11EPM7P Triple LED	L22F-11PM5P ON-(ON) L22F-11PL 5P ON-ON L22F-11PM6P Dual LED L22F-11PM7P Triple LED
		
L16F-11M 3P ON-(ON) L16F-11L 3P ON-ON L16F-11NM 5P ON-(ON) L16F-11NL 5P ON-ON	L22F-11M 3P ON-(ON) L22F-11L 3P ON-ON L22F-11NM ON-(ON) L22F-11NL ON-ON	DPC-16 φ 16 DPC-19 φ 19 DPC-22 φ 22 DPC-25 φ 25 Dustproof&Safety cover

















				
DS-12B DS-12B-L	GQ-16F	LAS3-16H-E	LAS1-19B-SR	LAS3A-22F/25F 20A 250VAC
				
DS-12B-DM DS-12B-DL	GQ-16B	LAS3-16H-HORN	LAS3-19 No LED	LAS3-22/25/30
				
GQ-8H GQ-10H	GQ-16H/J	PBS-28B-2	LAS3-19F-E	GQ40F-22E
				
GQ12H2-10EL	GQ16F-10EM	PBS-28B	LAS3-19F-EP	PZ16F-10 Piezo Switch
				
GQ-12B	LAS3-16 No LED	PBS-28B-4	LAS3D-19F-10E 15A 250VAC	PZ19F-10 Piezo Switch
				
GQ12H-10EM	LAS3-16F-E	LAS1-19-ZX	GQ22-11E	TS19C-10EP Touch Switch

	
KS-01-101C ON-OFF Total Length=23.5mm 0.5A 250VAC; 0.5A 24VDC	K16-05 ON-ON Total Length=31.75mm 2A 250VAC; 4A 28VDC
	
KS-01-101A ON-OFF Total Length=29mm 0.5A 250VAC; 0.5A 24VDC	K16-05C-102 3P ON-ON K16-05C-202 6P ON-ON Total Length=31.75mm 2A 250VAC; 4A 28VDC
	
KS-02-101 ON-OFF Total Length=24mm 0.5A 250VAC; 0.5A 24VDC	K19-06 ON-OFF 2P Total Length=40.3mm 2A 250VAC; 4A 28VDC
	
KS-02-101A ON-OFF Total Length=29mm 0.5A 250VAC; 0.5A 24VDC	K19-03-201 DPST ON-OFF 4P K19-03-102 SPDT ON-ON 4P Total Length=37.5mm 2A 250VAC; 4A 28VDC
	
KS-03-101 ON-OFF Total Length=23.5mm KS-03-111 OFF-(ON) Total Length=30.2mm 0.5A 250VAC; 0.5A 24VDC	K19-04-102 SP ON-ON K19-04-202 DP ON-ON K19-04-103 SP ON-ON-ON K19-04-203 DP ON-ON-ON Total Length=34mm 2A 250VAC; 4A 28VDC
	
K12-07 ON-OFF Total Length=33mm 0.5A 250VAC; 0.5A 24VDC	K19-05-112 SP ON-(ON) K19-05-212 DP ON-(ON) K19-05-113 SP ON-ON-(ON) K19-05-213 DP ON-ON-(ON) K19-05-123 SP (ON)-ON-(ON) K19-05-223 DP (ON)-ON-(ON) Total Length=39.5mm 2A 250VAC; 4A 28VDC
	
K16-101 ON-OFF K16-102 OFF-ON-ON Total Length=30.5mm 2A 250VAC; 4A 28VDC	LAS1-19-11ZK-102 ON-ON 3P LAS1-19-11ZK-103 ON-OFF-ON 3P LAS1-19-22ZK-102 ON-ON 6P LAS1-19-22ZK-103 ON-OFF-ON 6P

				
TST335 3X3.5X1.8/2.5	TST3425 3.2X4.2X2.5	TST3635 3.5X7X3.5	KFC-003A 3.7X6.1X2.5	KFC-003B 4.2X6.1X2.5
				
KFC-003C 3.5X6.1X4.3/5.0	KFC-003D 3.5X6.1X4.3/5.0	KFC-004A 5.2X5.2X1.5	KFC-004B 6.5X6.2X2.5/3.1	KFC-004D 6.5X6.2X2.5/3.1
				
KFC-045-H(4.5X4.5) H=3.8/4.3/4.8/5.0/7.0	KFC-045A-H(4.5X4.5) H=3.8/4.3/4.8/5.0/7.0	KFC-A06-H 6X6XH(H=4.3~23)	KFC-A06A-H 6X6XH(H=4.3~23)	KFC-A06B-H 6X6XH(H=4.3~23)
				
KFC-A06BS-H 6X6XH(H=4.3~23)	KFC-A06P2-H 6X6XH(H=4.3~23)	KFC-A06Y-4.3 KFC-A06Y-5.0	KFC-A06W1-7.3F 6X6X7.3	KFC-A06W1-H 6X6XH(H=4.3~13)
				
KFC-A06W2-H 6X6XH(H=4.3~13)	KFC-A06W3-H 6X6XH(H=4.3~13)	TSX88HN 7.8X7.8X5.5	TSX88HS 7.8X7.8X5.5	KFC-012-H 12X12XH(H=4.3~21)
				
KFC-012A-H 12X12XH(H=4.3~21)	KFC-012-7.3F 12X12X7.3	WS-A06-H IP67 6X6XH(H=4.3~19)	WS-M06 6X6X4.3/5.0 IP67	KFC-A06J-H H=3.1/3.5/4.3/5.0

				
KFC-2DV-7.3/9.5	WS-012-H IP67 12X12XH(H=4.3~19)	TSL-A061 6X9mm	TSL-A061-DL2 ϕ 7.5 TSL-A061-3L2 ϕ 8.0 TSL-A061-7L2 ϕ 10	TSL-A061-DL1 ϕ 7.5 TSL-A061-3L1 ϕ 8.0 TSL-A061-7L1 ϕ 10
				
TSL-A061-2DL1	TSL-A063 6X7.2mm	TSL-A063-DL1 ϕ 7.5 TSL-A063-3L1 ϕ 8.0 TSL-A063-7L1 ϕ 10	TSL-A063-9	TSL-012 12X12X7.3
				
PS-22F03L ON-ON PS-22F03N ON-(ON)	PS-42F09L ON-ON PS-42F09N ON-(ON)	KZJ2X2-A ON-ON KZJ2X2-B ON-(ON)	KZJ2X2-1J-A ON-ON KZJ2X2-1J-B ON-(ON)	MSK-12C02
				
MSS-22D18	SS-12D00	SS-12D07	SS-12D06 3A 250VAC	SS-12D10 3A 250VAC
				
SS-12F15	SS-12F17	SS-12F21	SS-12F23	SS-12F25
				
SS-12F44	SS-13D07	SS-13F23	SS-22D07	SS-22F07

				
SS-22F24	SS-22F25	SS-22F32	SS-22G04 1.5A 250VAC	SS-22I02 1.5A 250VAC
				
SS-22K35 1.5A 250VAC	SS-23D03	SS-23D07	SS-23F19 1.5A 250VAC	SS-23H25 3A 250VAC
				
SS-23L03 3A 250VAC	SS-24N01 3A 250VAC	SS-42H03	SK-12D07	SK-13D07
				
SK-22D02	SK-23D06	SK-23E01	TS-22E01AT15	TS-23E01AT15
				
SS-22N03 5A 250VAC	SS-22N04 10A 250VAC	SS-22N02 10A 250VAC	SS-23N02 8A 250VAC	SS-24N02 8A 250VAC
				
SS8-1 3A 250VAC	SS8-2 3A 250VAC	SS8-5 3A 250VAC	SS8-7 3A 250VAC	SS8-8 3A 250VAC

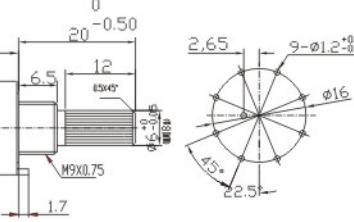	RBS-1-112-20VP (1P12T) RBS-1-206-20VP (2P6T) RBS-1-304-20VP (3P4T) RBS-1-403-20VP (4P3T) RBS-1-602-20VP (6P2T) L=15;20;25;40mm 0.5A 125VAC;0.3A 250VAC   
	RBS-1-112-20VS (1P12T) RBS-1-206-20VS (2P6T) RBS-1-304-20VS (3P4T) RBS-1-403-20VS (4P3T) RBS-1-602-20VS (6P2T) L=15;20;25;40mm 0.5A 125VAC;0.3A 250VAC   
	RTS-01-1P-20VP (1 Pole) RTS-01-2P-20VP (2 Poles) RTS-01-3P-20VP (3 Poles) RTS-01-4P-20VP (4 Poles) L=15;20;25;30;38;50mm 0.3A 125VAC;0.15A 250VAC  
	RS16-1-8-15VP (1P8T) RS16-2-4-15VP (2P4T) L=15;20;25mm 0.3A 60VDC  
	RT634-1 (5Pin 4Position) RT634-2 (3Pin 2Position) RT634-3 (4Pin 3Position) RT634-4 (6Pin 5Position) RT634-5 (7Pin 6Position) RT634-6 (8Pin 7Position) RT634-7 (9Pin 8Position) 6A 250VAC T85   
	RT2 Series L=11.4;15;18;23;26mm 16A 250VAC T100   


				
A-1316 (12.7x16)	A-1512 (15x12) A-2014 (20x14)	Aluminum Knob 18T	MSL (19.5x15)	KN-109(15x14) KN-112(15.5x17)
				
MF-A	C-2005(26x12)	C-2009(26x14)	KN-138(23.8x14) KN-135(29x19) KN-139(36.5x15.2)	KN-2618S(25.4x19)
				
MF-B	KN-8C/D/E/F	KYD19-16(19x16) KYD28-16(28x16)	KN-32(24x16)	KN-33B(32x18)
				
KN-1470A(28.4x12.7)	KN-1400(21x11)	KN-1900H-S(12.7x16)	MF-B00(20x11)	KN-7074(20x12)
				
KN-1516(15x16)	KN-1615(16x15)	KN-1614(16x14)	KA485-2(15x15)	KA485-4(15x15)
				
KN-19(19x15)	KN-1360(16x12)	KN-1611(16x15)	A-2019(31x16)	K7-1(32x13.5)

			
GQ6F-DW $\phi 6$	GQ8A-D $\phi 8$	GQ8B-D $\phi 8$	XD22-6 XD22-8 XD22-10 XD22-12 XD22-14 XD22-16
			
XD8-1 $\phi 8$ XD10-1M $\phi 10$ XD12-1M $\phi 12$	XD8-1W $\phi 8$	XD8-2 $\phi 8$	XD8-2W $\phi 8$
			
GQ12A-D (Pin) GQ12AS-D (Screw) $\phi 12$	GQ12A-DW-2 $\phi 12$ GQ16A-DW-2 $\phi 16$ Engravable	GQ16A-D-3 (Pin) GQ16AS-D-3 (Screw) Engravable $\phi 16$	GQ19A-D (Pin) GQ19AS-D (Screw) Engravable $\phi 19$
			
MDX-8 $\phi 8$	WL-04 $\phi 8$	XD10-1 $\phi 10$	XD10-3 $\phi 10$
			
XD10-6W $\phi 10$	XD10-7W $\phi 10$	XD10-8W $\phi 10$	MDX-11A $\phi 9.5$ MDX-14A $\phi 13$


			
MDX-11AW ϕ 9.5 MDX-141AW ϕ 13	MDX-13 ϕ 13	NXD-215 ϕ 8 NXD-211 ϕ 10 NXD-212 ϕ 12 NXD-213 ϕ 16	WL-02S ϕ 12.7
			
DR016 ϕ 16	PL1604 ϕ 15	KCD1-5-D ϕ 21	KCD3-D 28x10
			
AD16-16C ϕ 16	AD16-16E ϕ 16	AD16-22DS ϕ 22	AD16-16SM ϕ 16 AD16-22SM ϕ 22
			
LH-12,16,19,22 LED Halo	MLH-3(ϕ 3 LED) MLH-5(ϕ 5 LED) Metal Nickel	MLH-3-1(ϕ 3 LED) MLH-5-1(ϕ 5 LED) Metal Chrome	MLH-3-2(ϕ 3 LED) MLH-5-2(ϕ 5 LED) Metal Chrome
			
PLH-3(ϕ 3 LED) PLH-5(ϕ 5 LED) PLH-8(ϕ 8 LED) PLH-10(ϕ 10 LED) PLH-12(ϕ 12 LED)	PLH-3K(ϕ 3 LED) PLH-5K(ϕ 5 LED) PLH-8K(ϕ 8 LED) PLH-10K(ϕ 10 LED)	PLH-3K-2(ϕ 3 LED) PLH-5K-2(ϕ 5 LED) Plastic Black	LC3-1(ϕ 3 LED) LC5-1(ϕ 5 LED)

				
ASW-01	ASW-02D	ASW-01-HS	ASW-05 L=7/13/20	ASW-05A
				
ASW-07D+SAC-01	ASW-07D-2	ASW-08	ASW-13-101 ASW-13-111	ASW-13D ASW-13-103
				
ASW-14-101	ASW-14D	ASW-15D	ASW-17D	ASW-18
				
PIN-10R	P-31	PIN-2	PIN-7	ASW-20D
				
ASW-20D-2	ASW-23-101A	ASW-23-103A	ASW-29D	DS1825
				
RS-203/223/2233-4C	KCD2-7-101	KCD2-7-203 KCD2-7-223	R13-401-101	R13-401-103

				
R13-501-101 IP65	TS16-10EL IP67	A2-23B-07	ASW-B05	DR-A1
				
DR-A2	DR-A3	DR-A4	DR-A5	DR-A6
				
DR-A7	DR-A8	DR-A9	DR-AM	DR-AN
				
DR-AL Engravable	DR-AJ Engravable	DR-AX Engravable	DR-PBS-T002 Engravable	DR-T20A-B Engravable
				
ASW-A01	ASW-A1002	ASW-A1204S	ASW-A6004	ASW-A701
				
ASW-A701S-B	ASW-A705	ASW-A720	ASW-A802	ASW-A805

			
DS10-U	PN-1812	PN-1813	PN-1814
			
PN-1815	PN-1816	PN-1818	PN-AB2
			
PN-L6S1	PN-L6S3-2	PN-R5S3	PN-R6
			
PN-R8S4	PN-SAC1	PN-SAC2	PN-SAC3
			
PN-SAC5	SP-053	PN-SPRF8	PCP-6



				
R3-11 $\phi 5 \times 20$ $\phi 12.5$	FH-102 $\phi 6 \times 30$ $\phi 14$ FH-103 $\phi 6 \times 30$ $\phi 15$	F103-C1 $\phi 5 \times 20$ F103-C2 $\phi 6 \times 30$	F104-C1 $\phi 5 \times 20$ F104-C2 $\phi 6 \times 30$	F106-C $\phi 6 \times 30$
				
AGU-02 $\phi 10 \times 38$	QSA-1	QSB-1	QSB-2	QSC-1
				
QS-03 ATC Fuse	F107-C MINI Fuse	F110-C ATC Fuse	F111-C ATC Fuse	F114-C ATC Fuse
				
F117-C ATC Fuse	F113-C MAXI Fuse	F116-C MAXI Fuse	AFS-07	AFS-30
				
ANS-H	ANS-H12	MEGA-1	ANL-04	ANL-07-2
				
ANL-33	BB300-ANL	FB-1709L	FH-723	FB-1713

				
FB-1714	FB-2012 12IN12OUT FB-2012B 1IN12OUT	FB-1901	FB-1902	ST-1 3~25A
				
ST-2P 15~50A	ST-2A 15~50A	ST-001	CB-03	CB-06
				
RY-01 Thermo fuse 65°C~300°C 10A/15A	TLRS-9700 40°C~150°C 5A	KSD301A-OF2 NC Type KSD301B-OF2 NO Type	KSD301A-OR2 NC Type KSD301B-OR2 NO Type	KSD301M-BR2 Manual reset NC Type
				
HH54P(MY4) PYF14A Relay Socket	JQX-13F(LY2) PTF08A Relay Socket	JD1212 4P JD1213 5P	Jd1912 4P JD1914 5P	JD1912-W 4P JD1914-W 5P
				
JDS Relay Socket	WM686-K	RB-R4F12-W1	RB-R4F15-W1	RB-R6F11-W1
				
RB-R6F6	RB-R10F15	DT Series Connector	DJ7011;DJ7021;DJ7031 DJ7041;DJ7051;DJ7061	Anderson Connector

				
DJ610B-2.8X0.5A DJ617-4.8X0.5A DJ615-6.3X0.8B	DJ622-D2.8/4.8/6.3	DJ622-J2.8/4.8/6.3	DJ621-B6.3	DJ621-E4.8 DJ623-E6.3
				
DJ614-2.8X0.8B DJ619-4.8X0.8B DJ611-6.3	DJ4311 Series	RNB Series	AWG Series	SC Series
				
E Series	TE Series	RV Series	SV Series	FDD Series
				
MDD Series	FDFD Series	MPD Series	FRD Series	BV Series
				
RNY Series	SNY Series	FDNY Series	MDNY Series	MDFN Series
				
FDFN Series	FLDNY Series	HSRT Series	HSYT Series	HSMT Series

				
HSFT Series	FDFH Series	HSC-1 Series	SST Series	BNT Series
				
KW4 KW5 KW6	SP Series	HCE Series	CH-2 CH-3	TB Terminal Block
				
221-102	221-103	221-104	221-105	222-211
				
222-102	222-103	222-104	222-105	222-222
				
222-223	222-224	222-242	222-623	222-633
				
Wd025 L=27.5mm 5A Wd026 L=35mm 5A Wd027 L=42.5mm 10A	Wd038A L=27.5mm 5A Wd038B L=35mm 5A Wd038C L=42.5mm 10A	Wd032 L=43mm 5A Wd036 L=54mm 10A Wd038 L=65mm 20A Wd039 L=71mm 30A	Wd028A L=33mm 5A Wd028B L=41mm 5A Wd028C L=51.5mm 10A	Wd029 L=55/66mm 10A

				
WD030-2mm WD030-4mm 10A	WD031 L=50mm 10A	WD037 L=75mm 30A WD033 L=100mm 50A	WD040 L=105mm 100A	WD020 L=93mm
				
WD021 L=125mm	WD022 L=150mm Brass plated	WD200W 200A WD400W 400A WD600W 600A WD1000W 1000A	WD023 L=55mm 20A WD1069 L=84mm 30A	WD1096 L=32/50mm 10A WD1101 L=42/57mm 30A
				
WD1096+CX-3044	WD1096W	CX-2067 φ2mm	CX-2068 φ2mm	CX-3041 φ2mm
				
CZ-2086 φ2mm	CX-02 φ4mm	CX-03 φ4mm	CX-06 φ4mm	CX-07 φ4mm
				
CX-3022 φ4mm	CX-08 φ4mm	CX-2074 φ4mm	CX-3044 φ4mm	CX-3050 φ4mm
				
CZ2 φ4mm	CZ3 φ4mm	CZ4 φ4mm	CZ-2022 φ4mm	JS-301 φ8x46mm JS-302 φ4x42mm

				
JS-900A φ3mm JS-910A φ4mm JS-999A φ5mm	JS-910B φ4mm	JS-910B-2 φ4mm	JS-9222 φ4mm	JS-999B φ4mm
				
JS-999B-2 φ4mm	JS-333 φ6mm JS-555 φ8mm JS-555B φ10mm	5-30R	14-50R	AC-003B
				
AC-006	AC-008	AS-02	AS-04	AS-04F
				
AS-05	AS-08	AS-06	AS-07	AS-10
				
AS-10E	AC-02A	KET-501	AC-10F	AC-10M
				
AC-06A	AC-06C	AS-C19	WP2-2 L=45mm WP2-3 L=35mm	WP4-1 L=58mm

DC-005	DC-021	DC-022	DC-022K	DC-022B
DC-025M	DC-098 ϕ 9mm DC-099 ϕ 11mm	DC2.1	DC2.1-F	DC2.1-T1
DC2.1-F2	BNC-12	BNC-13	2F01M ϕ 2.5mm 3F01M ϕ 3.5mm	3F07 ϕ 3.5mm
EJ-214M ϕ 3.5mm	CT2502 ϕ 2.5mm CT3502 ϕ 3.5mm	CT3504 ϕ 3.5mm	PJ-617A	PJ-629HAN
PJ-644C	PJ-644D	PJ-644F	PJ-651A	PJ-663A
PJ-669 Mono PJ-670 Stereo	CT6351	CT6353	Ct6355 Mono CT042 Stereo	CT6356 Mono CT038 Stereo

BH2032-3	BH2032-5	BH2032X1	BH2032X2	BH-CR123A
BH5-1001 BH7-1001 BH18650-1001	BH5-1001P BH7-1001P BH18650-1001P	BH5-2001 BH7-2001 BH18650-2001	BH5-2002 BH7-2002	BH5-2003(W/ switch) BH7-2003(W/ switch)
WBH5-2004 IP65	BH5-3001 BH7-3001 BH18650-3001	BH5-3003(W/ switch) BH7-3003(W/ switch)	BH5-3010(3AA) BH7-3010(3AAA)	WBH5-3004 IP65
BH5-4001 BH7-4001 BH18650-4001	BH18650-4001S	BH5-4002 BH7-4002	BH5-6002(6AA) BH7-6002(6AAA)	BH5-8002(8AA) BH7-8002(8AAA)
BH5-8003 (8AA W/ switch)	DCK1	DCK7	DCK2	DCK3
DCK4	DCK6	DCK9	SBH-9V	BH-9VPC