



PRODUCTS CATALOG

Professional Circular Connector Manufacturer
Cable Assembly Solutions Experts



RAYMO ELECTRONICS TECHNOLOGY LIMITED



About "RAYMO"

RAYMO ELECTRONICSTECH NOLOGYLIMITED, here in after referred to as the " RAYMO", as a **Creative customer-oriented** manufacturer located in Shenzhen, focusing on manufacturing connectors and cable assemblies to serve over 75 countries and regions since 2010.

With professional R&D and excellent craftsmanship, our factory has the ability of providing customer with much more precision connectors and cable harness solutions to meet customer's demand in this fields.

RAYMO has already established an integrated quality control system from R&D, Supply Chain, Marketing, Sales, after-sales service to meet customer deeper demand, and expect to achieve Raymo's globalization strategy.

More than 3000 types connectors

Aimed on providing customer with suitable higher-qualified connectors and cable assemblies, our factory has already designed and developed over 3000 types of connectors and 1000 kinds of OEM cable assemblies based on customer real needs since the establishment.

Applications

RAYMO connectors and cable assemblies have been found to be widely used in the areas of telecommunication, electronics, medical equipments, Aviation, Audio-video, Petroleum, motor and power industries, electrical signal connection, IC control systems, test and measurement instruments, etc.

Our Missions

Design and develop more precision and suitable push pull connectors and cable assemblies for all humanity and the world
Provide better living conditions for employees

Certificates

CE RoHS ISO:9001-2015 SGS REACH



Building



Office



R&D



Production Department



Cable Warehouse



Warehouse



CNC Department



Over-Mold Department



CONTENTS TABLE

RM-F Series	
Part Numbering System	7
Metal Housing Models	9
Insulator Configuration	16
RM-L Series	
Part Numbering System	23
Metal Housing Models	25
Insulator Configuration	26
RM-U Series	
Part Numbering System	33
Metal Housing Models	34
Insulator Configuration	36
RM-C Series	
Part Numbering System	39
Metal Housing Models	41
Insulator Configuration	42
RM-G Series	
Part Numbering System	51
Metal Housing Models	53
Insulator Configuration	54
RM-A Series	
Part Numbering System	57
Metal Housing Models	60
Insulator Configuration	63
RM-B Series	
Part Numbering System	67
Metal Housing Models	69
Cable Collet	76
RM-K Series	
Part Numbering System	81
Metal Housing Models	83
Cable Collet	86



RM-W Series

Part Numbering System	89
Metal Housing Models	91
Insulator Configuration(B,K,W)	92

RM-M Series

Part Numbering System	99
Metal Housing Models	101
Insulator Configuration	104

RM-S Series

Part Numbering System	109
Metal Housing Models	111
Insulator Configuration	115

RM-P Series

Part Numbering System	121
Metal Housing Models	123
Cable Collet	125

RM-H Series

Part Numbering System	129
Metal Housing Models	130
Insulator Configuration	132

Accessories	134
PCB Drilling Pattern	139
Cable Datasheet	144
Product Safety Notice	152



RM-F Series


Metal Waterproof Push Pull Self-locking Connector

- Secure high performance push pull self-locking system
- Sealed up to IP68 and hermetic
- 3 codes alignment key and polarized keying system to avoid cross-interface
- 360° EMC shielded
- High pin density contributing to equipment miniaturization
- Robust and shock resistant designs
- Functional in a wide temperature range from -50°C to +250°C
- Available solder, PCB and right angle PCB contact



RM-F Series


Plugs



S/SC



SS/SSC




FS7



WSO



SFE/SFU



SV

Receptacles




D



DEE/DEU



DBP



DBPC



DBPE/DBPU



DBPLE/DBPLU



DBEE/DBEU



FG9




FGX



FGD




FGS



KE/K



KSE/KS



PGX




DKBE



DKE

Part Numbering System

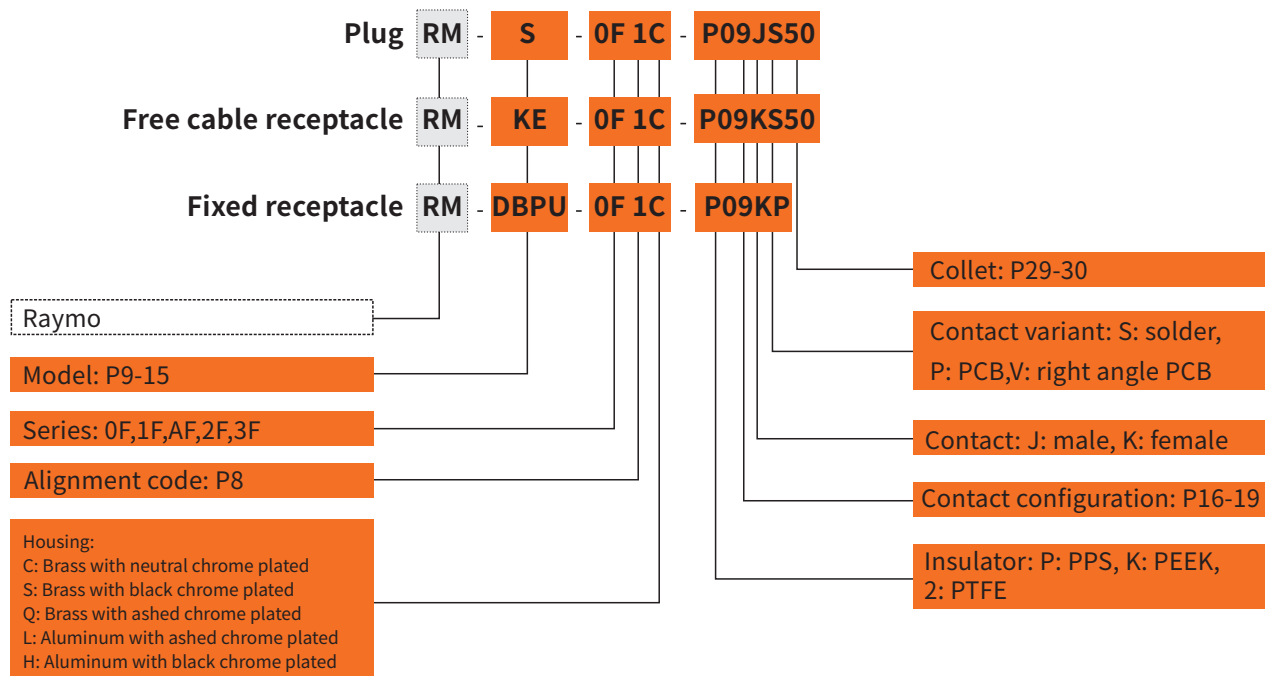

Part No.Example

Straight plug with cable collet

RM-S-0F1C-P09S50Z= straight plug, 0F series, code 1, multipole 9 contacts, outer shell in natural chrome-plated brass, PPS insulator, male solder contacts, collet for 4.2-5.2mm diameter cable with a black colour bend relief, IP68.

Free cable mount receptacle

RM-KE-0F1C-P09KS50= free cable receptacle, 0F series, code 1 multipole 9 contacts, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, collet for 4.2-5.2 mm diameter cable, IP68.


Fixed receptacle

RM-DBPU-0F1C-P09KP= fixed receptacle, nut fixing, 0F series, code 1, multipole 9 contacts, outer shell in natural chrome-plated brass, PPS insulator, female PCB contacts, IP68.

Part Section Showing Internal Components


Cable Mount Plug

- ① Conical Sleeve
- ② Male contact
- ③ Insulator
- ④ Fixed spacer
- ⑤ Latch sleeve
- ⑥ Outer shell
- ⑦ Split insert carrier A/B
- ⑧ Snap spring
- ⑨ EMI ring
- ⑩ O-ring

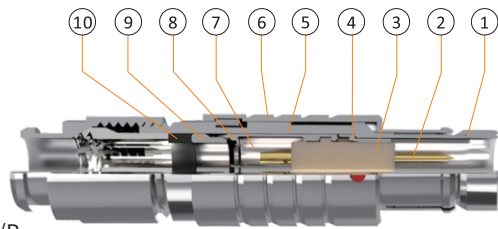

Fixed Receptacle

- ① Outer shell
- ② Hexagonal nut
- ③ Outer o-ring
- ④ Inner o-ring
- ⑤ Fixed spacer
- ⑥ Insulator
- ⑦ Female contact



Technical Characteristics

Mechanical and Climatical


Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C,+250°C	
Resistance to vibration	10-2000Hz, 15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96hrs	IEC 60512-6 test 11f
Protection index (mated)	IP68	IEC 60529
Climatical category	55/175/21	IEC 60068-1



Electrical

Characteristics		Value	Standard
Shielding efficiency	at 10 MHZ	>95 dB	IEC 60619-1-3
	at 1 GHz	>80 dB	IEC 60619-1-3


Code Options

Code 1 is standard, if for other codes, please specify.


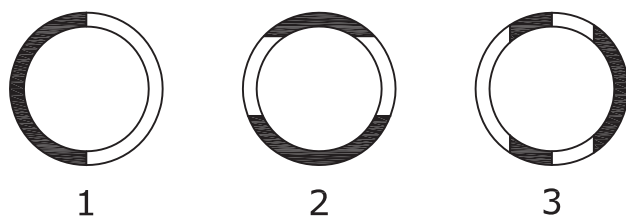



RM-S/SC Cable Mount Plug



Reference		Dimensions(mm)						
Model	Series	A	M	L	d ^{max}		S1	S2
					shielded clamp	sealed clamp		
RM-S/SC	0F	9.4	26	37.2	4.7	4.3	8	8
RM-S/SC	1F	12	34	45	6.7	6.2	9	9
RM-S/SC	AF	13	36	46	7.2	6.7	12	11
RM-S/SC	2F	15	36	48	8.7	8.7	13	13


RM-SS/SSC Cable Mount Short Plug


Reference		Dimensions(mm)						
Model	Series	A	L	M	d ^{max}		S1	S2
					shielded clamp	sealed clamp		
RM-SS/SSC	0F	9	33	23	4.7	4.3	8	7
RM-SS/SSC	1F	12	37	26	6.7	6.2	11	12
RM-SS/SSC	AF	12.3	40	30	7.2	6.7	11.5	12
RM-SS/SSC	2F	15	43	31	8.7	8.7	13	13


RM-SV Screw locking tamperproof straight plug


Reference		Dimensions(mm)						
Model	Series	A	B	D	d ^{max}		S1	D1
					shielded clamp	sealed clamp		
RM-FSV	0F	38	27.9	9.4	4.7	4.3	8	11


RM-FS7 Cable Mount Plug with lanyard

Reference		Dimensions(mm)							
Model	Series	A	L	M	N	d ^{max}		S1	S2
						shielded clamp	sealed clamp		
RM-FS7	0F	9	33	23	60	4.7	4.3	8	8
RM-FS7	1F	12	37	26	80	6.7	6.2	11	12
RM-FS7	AF	12.3	40	30	80	7.2	6.7	11.5	12
RM-FS7	2F	15	43	31	100	8.7	8.7	13	13

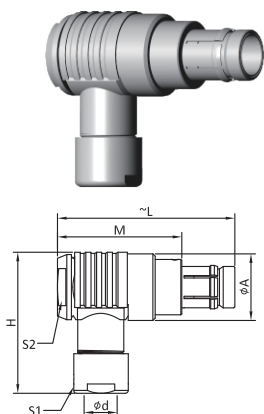RM-F

RM-WSO Elbow Right-angle Cable Mount Plug

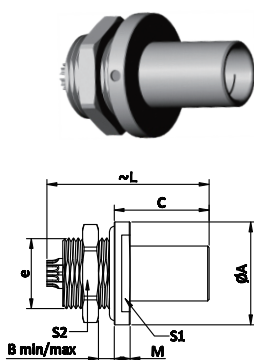
Reference		Dimensions(mm)							
Model	Series	A	L	M	H	d ^{max}		S1	S2
						shielded clamp	sealed clamp		
RM-WSO	0F	12	33	23	25	4.7	4.3	7	8
RM-WSO	1F	15	38	28.7	31	6.7	6.2	10	11
RM-WSO	AF	17	40	30	33	7.2	6.7	12	12
RM-WSO	2F	19	45	33	37	8.7	8.7	13	14


RM-SFE/SFU Fixed Sealed Panel Mount Plug


Reference		Dimensions(mm)							
Model	Series	A	B	C	e	L	M	S1	S2
RM-SFE/SFU	0F	13	0/2.5	13.0	M9*0.5	21	3.0	11	11
RM-SFE/SFU	1F	17	0/5.0	14.0	M12*1.0	26	3.0	14	14
RM-SFE/SFU	AF	19	0/4.0	13.7	M14*1.0	26.5	3.7	17	14
RM-SFE/SFU	2F	22	0/7.5	15.0	M16*1.0	28	3.0	19	19


RM-D Panel Mount Receptacle


Reference		Dimensions(mm)						
Model	Series	A	B	e	L	M	S2	
RM-D	0F	11	0/9	M9*0.5	18.9	1.5	11	
RM-D	1F	14	0/8	M12*1.0	23.9	1.5	14	
RM-D	AF	16	0/10	M14*1.0	23.3	2	17	
RM-D	2F	19	0/11	M15*1.0	25.8	2.2	17	

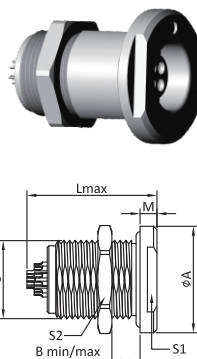
RM-DEE Hermetic Panel Mount Receptacle, Nut fixing



Reference		Dimensions(mm)						
Model	Series	A	B	e	L	M	S1	S2
RM-DEE	0F	14	8/10	M9*0.5	20	2.5	11	11
RM-DEE	1F	18	0/12	M14*1.0	23.9	3.0	14	17
RM-DEE	AF	19	0/12	M14*1.0	23.3	3.0	15	17
RM-DEE	2F	20	0/13	M16*1.0	25.8	4.0	17	19


RM-DEU Sealed Panel Mount Receptacle, Nut fixing


Reference		Dimensions(mm)						
Model	Series	A	B	e	L	M	S1	S2
RM-DEU	0F	14	8/10	M9*0.5	20	2.5	11	11
RM-DEU	1F	18	0/12	M14*1.0	23.9	3.0	14	17
RM-DEU	AF	19	0/12	M14*1.0	23.3	3.0	15	17
RM-DEU	2F	20	0/13	M16*1.0	25.8	4.0	17	19


RM-DBP Fixed Panel Mount Receptacle


Reference		Dimensions(mm)						
Model	Series	A	B	P	E	e	L	S1
RM-DBP	0F	12	0/3.5	6.5	10	M9*0.5	20	10
RM-DBP	1F	15	0/4.0	8.0	12	M12*1.0	23	-
RM-DBP	AF	18	0/3.0	7.0	13	M14*1.0	23	-
RM-DBP	2F	16	0/5.0	9.0	11.5	M15*1.0	26	-

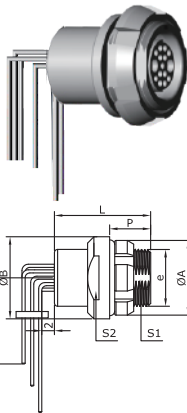
RM-DBPC Panel Mount Receptacle, in elbow 90° pcb type


Reference		Dimensions(mm)						
Model	Series	A	B	e	L	P	S1	S2
RM-DBPC	0F	12	14	M9*0.5	19.2	6.5	8.2	11
RM-DBPC	1F	18	18	M14*1.0	24.8	8	12.5	15
RM-DBPC	AF	18	19	M14*1.0	23.1	7	12	15
RM-DBPC	2F	20.8	21	M16*1.0	24.2	8	14.3	16


RM-DBPE Hermetic Panel Mount Receptacle


Reference		Dimensions(mm)						
Model	Series	A	B	e	L	P	S1	S2
RM-DBPE	0F	12	14	M9*0.5	19.2	6.5	8.2	11
RM-DBPE	1F	18	18	M14*1.0	24.8	8	12.5	15
RM-DBPE	AF	18	19	M14*1.0	23.1	7	12	15
RM-DBPE	2F	20.8	21	M14*1.0	24.2	8	14.3	16


RM-DBPU Sealed Panel Mount Receptacle


Reference		Dimensions(mm)							
Model	Series	A	B	e	L	P	S1	S2	
RM-DBPU	0F	12	14	M9*0.5	19.2	6.5	8.2	11	
RM-DBPU	1F	18	18	M14*1.0	24.8	8	12.5	15	
RM-DBPU	AF	18	19	M14*1.0	23.1	7	12	15	
RM-DBPU	2F	20.8	21	M16*1.0	24.2	8	14.3	16	


RM-DBPLE Fixed Front Hermetic Mount Receptacle



Reference		Dimensions(mm)									
Model	Series	A	B	C	e	L	D	M	S1	S2	
RM-DBPLE	0F	13	0/4.5	10	M10*0.5	17	14	3.5	11	11	
RM-DBPLE	1F	28	0/5.0	17.5	M14*1.0	24	18	4.5	15	15	
RM-DBPLE	AF	20	0/5.5	16.5	M15*1.0	23	19	4.5	17	15	
RM-DBPLE	2F	20	0/6.5	17	M16*1.0	27	22	5.0	17	17	


RM-DBPLU Fixed Sealed Front Mount Receptacle


Reference		Dimensions(mm)									
Model	Series	A	B	C	e	L	D	M	S1	S2	
RM-DBPLU	0F	13	0/4.5	10	M10*0.5	17	14	3.5	11	11	
RM-DBPLU	1F	28	0/5.0	17.5	M14*1.0	24	18	4.5	15	15	
RM-DBPLU	AF	20	0/5.5	16.5	M15*1.0	23	19	4.5	17	15	
RM-DBPLU	2F	20	0/6.5	17	M16*1.0	27	22	5.0	17	17	


RM-DBEE Front Hermetic Panel Mount Receptacle


Reference		Dimensions(mm)								
Model	Series	A	B	C	e	L	M	S1	S2	
RM-DBEE	0F	13.9	0/3.5	10.0	M9*0.5	20	2.5	11	11	
RM-DBEE	1F	17.8	0/4.0	13.0	M14*1.0	23.9	3.0	14	17	
RM-DBEE	AF	19	0/4.0	12.0	M14*1.0	23.3	3.0	15	14	
RM-DBEE	2F	21.8	0/3.5	15.0	M16*1.0	25.8	3.0	17	19	


RM-DBEU Sealed Front Panel Mount Receptacle



Reference		Dimensions(mm)							
Model	Series	A	B	C	e	L	M	S1	S2
RM-DBEU	0F	13.9	0/3.5	10.0	M9*0.5	20	2.5	11	11
RM-DBEU	1F	17.8	0/4.0	13.0	M14*1.0	23.9	3.0	14	17
RM-DBEU	AF	19	0/4.0	12.0	M14*1.0	23.3	3.0	15	14
RM-DBEU	2F	21.8	0/3.5	16.0	M16*1.0	25.8	3.0	17	19


RM-FG9 Sealed Panel Mount Receptacle



Reference		Dimensions(mm)						
Model	Series	A	B	e	L	P	S1	S2
RM-FG9	0F	12	14	M9*0.5	19.2	6.5	8.0	11
RM-FG9	1F	18	18	M14*1.0	24.8	8	12.5	15
RM-FG9	AF	18	19	M14*1.0	23.1	7	12	15


RM-FGX Sealed Panel Mount Receptacle only for 0F series


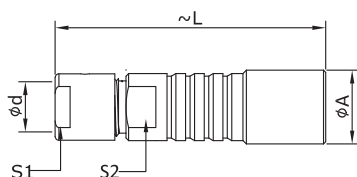
Reference		Dimensions(mm)						
Model	Series	A	B	e	L	P	S1	S2
RM-FGX	0F	12	13	M9*0.5	15.7	6.5	8.2	11
RM-FGX	1F	18	19	M14*1.0	21	6.5	12.5	15


RM-FGD Panel Mount Receptacle, nut fixing


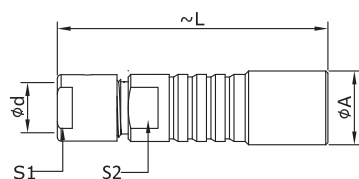
Reference		Dimensions(mm)						
Model	Series	A	B	e	L	M	S1	S2
RM-FGD	0F	12	12	M9*0.5	15.7	6.5	8.2	11

RM-F

RM-FGS Back panel fixed receptacle, waterproof


Reference		Dimensions(mm)									
Model	Series	A	B	e	D	L	P	M	S1	S2	
RM-FGS	AF	18	0/8	M14*0.5	19	23.1	12	3.7	12	15	


RM-KE Sealed Cable Mount Receptacle

Reference		Dimensions(mm)					
Model	Series	A	L	d max		S1	S2
				shielded clamp	sealed clamp		
RM-KE	0F	10	36	4.7	4.3	7	7
RM-KE	1F	13	43	6.7	6.2	10	10
RM-KE	AF	13.5	45	7.2	6.7	12	11
RM-KE	2F	16	48	8.7	8.7	13	12


RM-K Cable Mount Receptacle


Reference		Dimensions(mm)					
Model	Series	A	L	d max		S1	S2
				shielded clamp	sealed clamp		
RM-K	0F	10	36	4.7	4.3	7	7
RM-K	1F	13	43	6.7	6.2	10	10
RM-K	AF	13.5	45	7.2	6.7	12	11
RM-K	2F	16	48	8.7	8.7	13	12


RM-KSE Short Sealed Cable Mount Receptacle


Reference		Dimensions(mm)						
Model	Series	A	L	M	d max	S1	S2	
RM-KSE	0F	10	32	23	3.8	8	8	
RM-KSE	1F	13	37	26	6.0	11	12	
RM-KSE	AF	13.5	36	30	6.2	11.5	12	
RM-KSE	2F	16	45	31	8.0	13	13	




RM-KS Short Cable Mount Receptacle



Reference		Dimensions(mm)					
Model	Series	A	L	M	d max	S1	S2
RM-KS	0F	10	32	23	3.8	8	8
RM-KS	1F	13	37	26	6.0	11	12
RM-KS	AF	13.5	36	30	6.2	11.5	12
RM-KS	2F	16	45	31	8.0	13	13




RM-PGX Cable Mount Receptacle only used by overmoulding




Reference		Dimensions(mm)				
Model	Series	A	B	e	L	S1
RM-PGX	0F	12	10	M9*0.5	15.5	8.2
RM-PGX	1F	16	14	M12*0.6	24.8	9.0
RM-PGX	AF	16	14	M12*0.6	23.1	10
RM-PGX	2F	18	16	M14*0.6	24.2	12




RM-DKBE Panel Mounted Cable Receptacles



Reference		Dimensions(mm)										
Model	Series	A	B	C	D	d max		D1	M	S1	S2	S3
						shielded clamp	sealed clamp					
RM-DKBE	0F	35	0/3.5	16	16	4.7	4.3	16	12*1	7	7	13
RM-DKBE	1F	43	0/4.0	19	19	6.7	6.2	20	15*1	10	10	17
RM-DKBE	AF	46	0/4.0	21	21	7.2	6.7	20	16*1	12	11	17
RM-DKBE	2F	50	0/5.0	23	23	8.7	8.7	23	18*1	12	13	20



RM-DKE Panel Mounted Cable Receptacles



Reference		Dimensions(mm)										
Model	Series	A	B	C	C1	D	d max		M	S1	S2	S3
							shielded clamp	sealed clamp				
RM-DKE	2F	50	0/8	16	3	22	8.7	8.7	16*1	12	13	19

Insulator Configuration

RM-F

		Code	Ohm(Ω)	Contact diameter	Contact No.	Contact max. diameter	Insert max. diameter	Voltage standing-wave ratio VSWR(F=GHz)	Test voltage(kv/rms)	Current rate(A)
0F		250	50	0.9	50	0.95	2.95	1.09 +0.11f	3.0	6
		275	75	0.7	75	1.05	3.95	1.02 +0.25f	2.4	3
1F		250	50	1.6	50	1.35	3.95	1.01 +0.23f	3.0	12
		275	75	1.3	75	1.05	3.95	1.02 +0.08f	2.4	10
2F		250	50	2.0	50	1.75	5.95	1.01 +0.95f	3.0	15
		275	75	1.6	75	1.35	5.95	1.02 +0.03f	1.5	12

- First choice alternative
- Special order alternative

Insulator Configuration

		Code	Contact No.	ØA(MM)	Solder contact	PCB straight contact	PCB elbow contact	Test voltage(contact-shell)kV/AC-rms	Test voltage(contact-contact)kV/AC-rms	Rated current /A
0F		P02	2	0.9	●	●	●	1.30	1.05	9.2
		P03	3	0.9	●	●	●	1.20	0.90	8.2
		P04	4	0.7	●	●	●	0.85	0.70	5.5
		P05	5	0.7	●	●	●	1.00	0.70	5.2
		P07	7	0.5	●	●	●	0.80	0.70	2.0
		P09	9	0.5	●	●	●	0.60	0.50	1.7
1F		P02	2	1.3	●	●	●	1.50	1.35	13.0
		P03	3	1.3	●	●	●	1.30	1.55	12.0
		P04	4	0.9	●	●	●	1.35	1.45	7.0
		P05	5	0.9	●	●	●	1.25	1.15	6.8
		P06	6	0.7	●	●	●	1.05	1.20	5.2
		P07	7	0.7	●	●	●	0.95	1.05	5.0
		P08	8	0.7	●	●	●	0.95	1.15	3.8
		P10	10	0.5	●	●	●	0.90	1.50	2.5
		P12	12	0.5	●	●	●	0.80	1.20	2.0
		P14	14	0.5	●	●	●	0.80	1.20	2.0
	P16	16	0.5	●	●	●	0.80	1.25	1.5	

● First choice alternative
○ Special order alternative

Insulator Configuration


RM-F

			Code	Contact No.	ØA(MM)	Solder contact	PCB straight contact	PCB elbow contact	Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
AF			P10	10	0.7	●	●	●	1.40	1.50	4.5
			P12	12	0.7	●	●	●	1.40	1.50	3.0
			P15	2 13	1.3 0.5	●	●	●	1.50 1.20	1.35 0.90	12.0 2.5
			P19	19	0.5	●	●	●	1.20	0.90	2.5
2F			P02	2	1.6	●	●	●	1.80	2.20	20.0
			P03	3	1.6	●	●	●	1.60	2.00	18.0
			P04	4	1.3	●	●	●	1.80	2.20	12.0
			P06	6	0.9	●	●	●	1.70	2.00	6.5
			P08	8	0.9	●	●	●	1.50	1.50	6.2
			P09	1 8	1.3 0.9	● ●	● ●	● ●	2.40 1.40	2.20 1.50	12.0 6.0
			P11	11	0.9	●	●	●	1.40	1.50	5.8
			P16	16	0.7	●	●	●	1.00	1.50	4.0

- First choice alternative
- Special order alternative

			Code	Contact No.	ØA(MM)	Solder contact	PCB straight contact	PCB elbow contact	Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
2F			P19	19	0.7	●	●	●	0.80	1.20	3.5
			P26	26	0.5	●	○	○	0.75	1.10	1.0
3F			P04	4	2.0	●	○	○	1.8	2.60	20.0
			P07	1	2.0	●	○	○	2.0	3.00	25.0
				6	1.3	●	○	○	1.5	2.00	7.0
			P37	27	0.5	●	○	○	0.75	1.00	1.0
10				0.7	●	○	○	0.75	1.10	2.2	

- First choice alternative
- Special order alternative

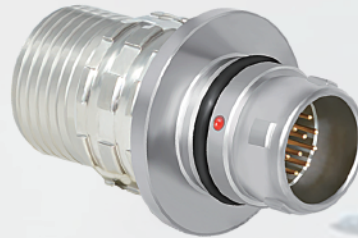

Infrared night vision applications

RM-L Series


Metal Waterproof Push Pull Self-locking Connector

- Secure high performance push pull self-locking system
- Sealed up to IP68 and hermetic
- Alignment keys and polarized keying system to avoid cross-interface
- 360° EMC shielded
- High pin density contributing to equipment miniaturization
- Robust and shock resistant designs
- Functional in a wide temperature range from -50°C to +250°C
- Available solder, PCB and right angle PCB contact



RM-L Series

Plugs




FS2




FSX

Receptacles




FG8



FGX

Part Numbering System

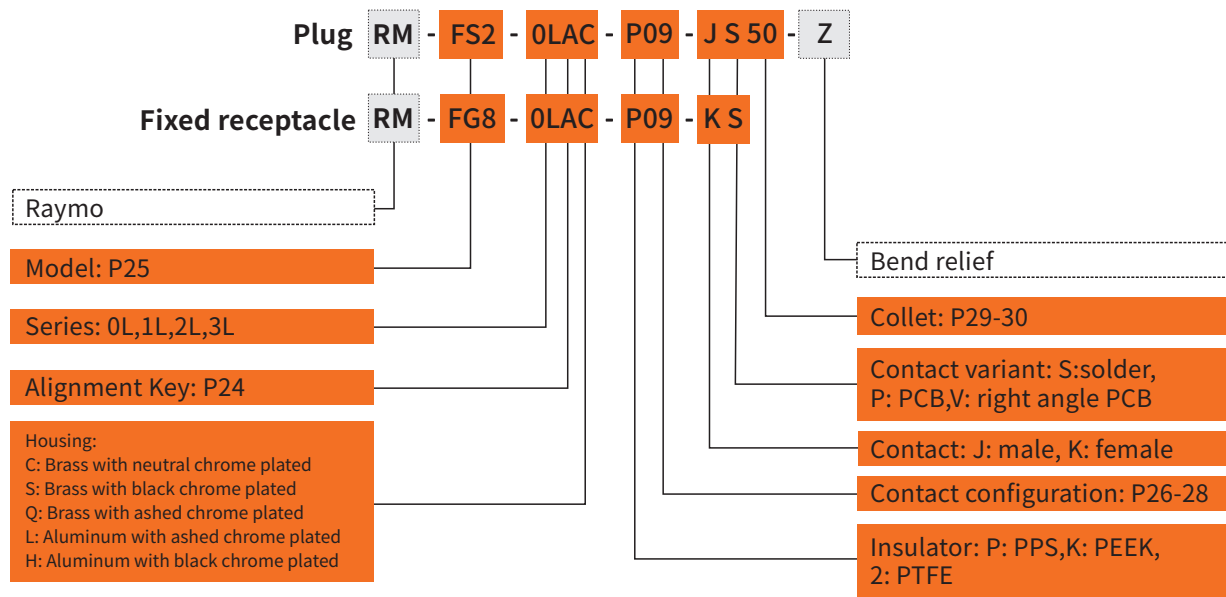

Part No.Example

Straight plug with cable collet

RM-FS2-0LAC-P09-S50Z= straight plug, 0L series, key 2, 30 degree, multipole 9 contacts, outshell innatural chrome-plated brass, PPS insulator, male solder contacts, collet for4.2-5.2mm diameter cable, IP68.


Fixed receptacle

RM-FG8-0LAC-P08KS= fixed receptacle, 0L series, key 2, 30 degree, multipole 8pin, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, IP68.

Part Section Showing Internal Components


Cable Mount Plug

- ① Conial sleeve
- ② Male contact
- ③ Insulator
- ④ Latch sleeve
- ⑤ Outer shell
- ⑥ Split insert carrier A/B
- ⑦ Snap Spring
- ⑧ Earthing ring
- ⑨ Cable collet
- ⑩ Collet nut

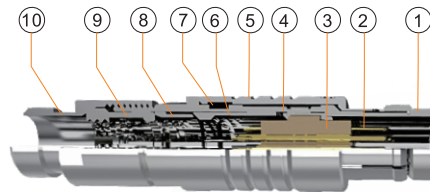

Fixed Receptacle

- ① Outer shell
- ② Hexagonal nut
- ③ Outer o-ring
- ④ Inner o-ring
- ⑤ Retaining ring
- ⑥ Insulator
- ⑦ Female contact



Technical Characteristics

Mechanical and Climatrical

Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibration	10-2000Hz, 15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96h	IEC 60512-6 test 11f
Protection index (mated)	IP68	IEC 60529
Climatrical category	55/175/21	IEC 60068-1

Electrical


Characteristics	Value	Standard
Shielding efficiency	at 10 MHz at 1 GHz	>95 dB >80 dB
		IEC 60619-1-3 IEC 60619-1-3

Alignment key and Polarized Keys(RM-L series)



RM-L series connector model type are composed of five letters

The last letter indicated the key position and the contact type(male or female)

Front view of receptacle




Code	Keys No.	Angles	Series			Contact Type	
			0L	1L	2L	Plug	Receptacle
0	1	α	0°	0°	0°	Male	Female
A	2		30°	30°	30°	Male	Female
B	2		-	-	37.5°	Male	Female
C	2		-	-	45°	Male	Female
F	2		60°	60°	60°	Male	Female
H	2		-	-	75°	Male	Female
J	2		90°	90°	-	Male	Female
C	2	γ	45°	45°	-	Male	Female
M	2		-	-	100°	Male	Female
T	2	δ	-	-	125°	Male	Female
V	2		-	135°	-	Male	Female
Q	2	β	-	120°	120°		
W	2		-	-	145°		
Y	2		155°	155°	-		



RM-FS2 Cable mount plug



Reference		Dimensions(mm)				
Model	Series	A	L	M	S1	S2
RM-FS2	0L	9.4	40	30	8	8
RM-FS2	1L	12	49	38	10	10
RM-FS2	2L	15	53	40	16	15

RM-L





RM-FSX Straight plug, self-latching, IP68

Reference		Dimensions(mm)				
Model	Series	A	L	M	S1	S2
RM-FSX	XL	13	33.5	24	9	8



RM-FG8 Fixed receptacle, back panel mounting

Reference		Dimensions(mm)						
Model	Series	A	B	e	L	P	S1	S2
RM-FG8	0L	15	14.5	M10*1.0	20.5	6.5	9	12
RM-FG8	1L	18	18	M14*1.0	26	8	12	15
RM-FG8	2L	21	21	M16*1.0	29	6	14.4	16



























RM-FGX Fixed receptacle, self-latching, IP68

Reference		Dimensions(mm)						
Model	Series	A	B	e	L	P	S1	S2
RM-FGX	XL	14	14.5	M10*0.5	18.5	6.5	9.3	11

Insulator Configuration

RM-L

	solder male contact 	solder female contact 	Insulator	Contact No.	ØA(MM)	Contact type			Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
OL			P02	2	0.9	●	●	●	1.30	1.05	10.0
			P03	3	0.9	●	●	●	1.20	0.90	8.0
			P04	4	0.7	●	●	●	0.85	0.70	7.0
			P05	5	0.7	●	●	●	1.00	0.70	6.5
			P06	6	0.5	●	●	●	0.85	0.65	2.5
			P07	7	0.5	●	●	●	0.80	0.70	2.5
			P09	9	0.5	●	●	●	0.60	0.50	2.0
XL			P13	13	0.5	●	●	●	0.80	0.65	3.0
			P14	14	0.5	●	●	●	0.80	0.60	1.0
			P16	16	0.5	●	●	●	0.60	0.50	1.0
			P19	19	0.4	●	●	●	0.30	0.25	1.0

- First choice alternative
- Special order alternative

Insulator Configuration































	solder male contact 	solder female contact 	Insulator	Contact No.	ØA(MM)	Contact type			Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
1L			P02	2	1.3	●	●	●	1.50	1.35	15.0
			P03	3	1.3	●	●	●	1.30	1.55	12.0
			P04	4	0.9	●	●	●	1.35	1.45	10.0
			P05	5	0.9	●	●	●	1.25	1.15	9.0
			P06	6	0.7	●	●	●	1.05	1.20	7.0
			P07	7	0.7	●	●	●	0.95	1.05	7.0
			P08	8	0.7	●	●	●	0.95	1.15	5.0
			P10	10	0.5	●	●	●	0.90	1.50	2.5
			P14	14	0.5	●	●	●	0.80	1.20	2.0
			P16	16	0.5	●	●	●	0.80	1.25	1.5

- First choice alternative
- Special order alternative

RM-L

Insulator Configuration

RM-L

	solder male contact 	solder female contact 	Insulator	Contact No.	ØA(MM)	Contact type			Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
2L			P02	2	2.0	●	●	●	2.10	1.75	30.0
			P03	3	1.6	●	●	●	2.40	1.85	17.0
			P04	4	1.3	●	●	●	1.85	1.85	15.0
			P05	5	1.3	●	●	●	1.75	1.60	14.0
			P06	6	1.3	●	●	●	1.35	1.45	12.0
			P07	7	1.3	●	●	●	1.75	1.60	11.0
			P08	8	0.9	●	●	●	1.50	1.25	10.0
			P10	10	0.9	●	●	●	1.45	1.30	8.0
			P12	12	0.7	●	●	●	1.25	1.35	7.0
			P14	14	0.7	●	●	●	1.15	1.35	6.5
			P16	16	0.7	●	●	●	0.95	1.25	6.0
			P18	18	0.7	●	●	●	0.85	1.20	5.5
			P19	19	0.7	●	●	●	0.95	1.25	5.0
			P26	26	0.5	●	●	●	0.95	1.30	2.0

- First choice alternative
- Special order alternative

RM-L series Cable collet (Collet are same with RM-F series)

RM-0F-S



Shielded Cable Clamp Set

Cable dia Range	Collet Ø (mm)	Cable Clamp Set	Cable dia Range	Collet Ø (mm)	Cable Clamp Set
1.5 - 2.1	2.1	RM-0F-S-021	3.6 - 4.1	4.1	RM-0F-S-041
2.1 - 2.6	2.6	RM-0F-S-026	4.1 - 4.3	4.3	RM-0F-S-043
2.6 - 3.1	3.1	RM-0F-S-031	4.3 - 4.7	4.7	RM-0F-S-047
3.1 - 3.6	3.6	RM-0F-S-036			

RM-L

RM-0F-E



Environmentally Sealed Clamp Set

Cable dia Range	Collet Ø (mm)	Cable Clamp Set	Cable dia Range	Collet Ø (mm)	Cable Clamp Set
1.5 - 2.1	2.1	RM-0F-E-021	3.6 - 4.1	4.1	RM-0F-E-041
2.1 - 2.6	2.6	RM-0F-E-026	4.1 - 4.3	4.3	RM-0F-E-043
2.6 - 3.1	3.1	RM-0F-E-031	4.3 - 4.7	4.7	RM-0F-E-047
3.1 - 3.6	3.6	RM-0F-E-036	4.7 - 5.0	5.0	RM-0F-E-050

RM-1F-S



Shielded Cable Clamp Set

Cable dia Range	Collet Ø (mm)	Cable Clamp Set PPS Insulator	Cable dia Range	Collet Ø (mm)	Cable Clamp Set PPS Insulator
1.7 - 2.2	2.2	RM-1F-S-022	4.2 - 4.7	4.7	RM-1F-S-047
2.2 - 2.7	2.7	RM-1F-S-027	4.7 - 5.2	5.2	RM-1F-S-052
2.7 - 3.2	3.2	RM-1F-S-032	5.2 - 5.7	5.7	RM-1F-S-057
3.2 - 3.7	3.7	RM-1F-S-037	5.7 - 6.2	6.2	RM-1F-S-062
3.7 - 4.2	4.2	RM-1F-S-042	6.2 - 6.7	6.7	RM-1F-S-067

RM-1F-E




Environmentally Sealed Clamp Set

Cable dia Range	Collet Ø (mm)	Cable Clamp Set PPS Insulator	Cable dia Range	Collet Ø (mm)	Cable Clamp Set PPS Insulator
1.7 - 2.2	2.2	RM-1F-E-022	4.2 - 4.7	4.7	RM-1F-E-047
2.2 - 2.7	2.7	RM-1F-E-027	4.7 - 5.2	5.2	RM-1F-E-052
2.7 - 3.2	3.2	RM-1F-E-032	5.2 - 5.7	5.7	RM-1F-E-057
3.2 - 3.7	3.7	RM-1F-E-037	5.7 - 6.2	6.2	RM-1F-E-062
3.7 - 4.2	4.2	RM-1F-E-042			

RM-L series Cable collet (Collet are same with RM-F series)


RM-AF-S



Sheilded Cable Clamp Set

Cable dia Range	Collet Ø (mm)	Cable Clamp Set	Cable dia Range	Collet Ø (mm)	Cable Clamp Set
2.2 - 2.7	2.7	RM-AF-S-027	4.7 - 5.2	4.7	RM-AF-S-052
2.7 - 3.2	3.2	RM-AF-S-032	5.2 - 5.7	5.7	RM-AF-S-057
3.2 - 3.7	3.7	RM-AF-S-037	5.7 - 6.2	6.2	RM-AF-S-062
3.7 - 4.2	4.2	RM-AF-S-042	6.2 - 6.7	6.7	RM-AF-S-067
4.2 - 4.7	4.7	RM-AF-S-047	6.7 - 7.2	7.2	RM-AF-S-072


RM-AF-E



Environmentally Sealed Clamp Set

Cable dia Range	Collet Ø (mm)	Cable Clamp Set	Cable dia Range	Collet Ø (mm)	Cable Clamp Set
2.2 - 2.7	2.7	RM-AF-E-027	4.7 - 5.2	4.7	RM-AF-E-052
2.7 - 3.2	3.2	RM-AF-E-032	5.2 - 5.7	5.7	RM-AF-E-057
3.2 - 3.7	3.7	RM-AF-E-037	5.7 - 6.2	6.2	RM-AF-E-062
3.7 - 4.2	4.2	RM-AF-E-042	6.2 - 6.7	6.7	RM-AF-E-067
4.2 - 4.7	4.7	RM-AF-E-047			


RM-2F-S



Sheilded Cable Clamp Set

Cable dia Range	Collet Ø (mm)	Cable Clamp Set	Cable dia Range	Collet Ø (mm)	Cable Clamp Set
2.9 - 4.0	4.0	RM-2F-S-040	6.7 - 7.7	7.7	RM-2F-S-077
4.0 - 4.7	4.7	RM-2F-S-047	7.7 - 8.7	8.7	RM-2F-S-087
4.7 - 5.7	5.7	RM-2F-S-057	8.7 - 9.1	9.1	RM-2F-S-091
5.7 - 6.7	6.7	RM-2F-S-067			

RM-2F-E



Environmentally Sealed Clamp Set

Cable dia Range	Collet Ø (mm)	Cable Clamp Set PPS Insulator	Cable dia Range	Collet Ø (mm)	Cable Clamp Set PPS Insulator
2.9 - 4.0	4.0	RM-2F-E-040	5.7 - 6.7	6.7	RM-2F-E-067
4.0 - 4.7	4.7	RM-2F-E-047	6.7 - 7.7	7.7	RM-2F-E-077
4.7 - 5.7	5.7	RM-2F-E-057	7.7 - 8.7	8.7	RM-2F-E-087

RM-U Series

Metal Waterproof Push Pull Self-locking Connector

U series has same insulator and contact configuration as F series:

- Secure high performance push pull self-locking system
- Compact design and light weight construction
- Sealed up to IP68 and hermetic
- 3 codes alignment keys system to avoid cross-interface
- 360° EMC shielded
- High pin density contributing to equipment miniaturization
- Robust and shock resistant designs
- Available solder, PCB and right angle PCB contact




RM-U Series

Plugs



FSX

Receptacles



FG3



FGK




FGX



PGX

Part Numbering System

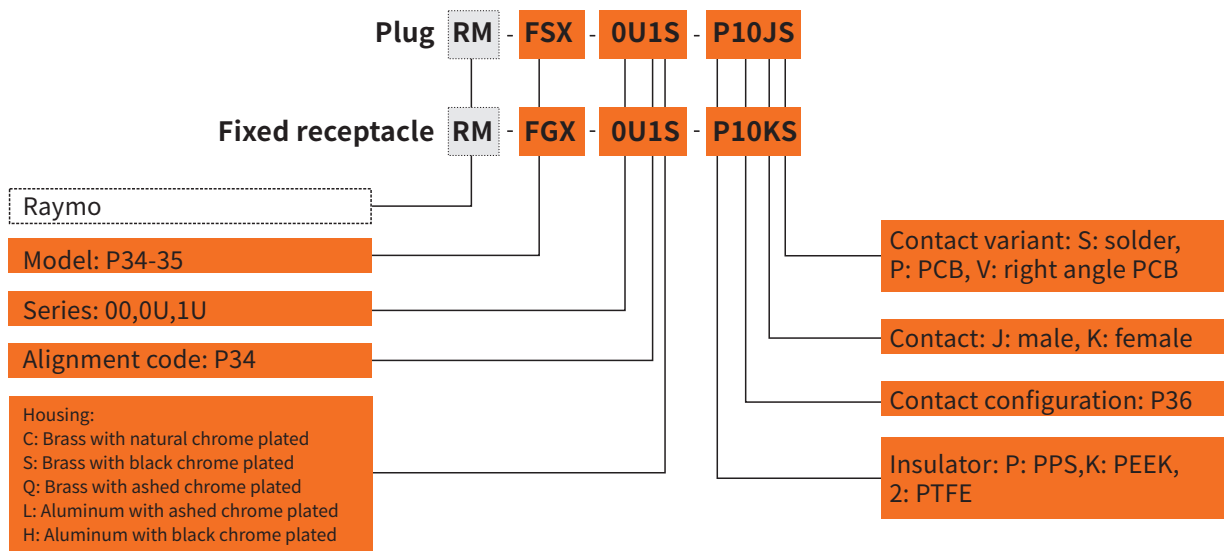

Part No.Example

Straight plug with cable collet

RM-FSX-0U1S-P10JS= straight plug, 0U series, code 1, multipole 10 contacts, outer shell in black chrome-plated brass, PPS insulator, male solder contacts, IP68.


Fixed receptacle

RM-FGX-0U2C-P10KS= fixed receptacle, 0U series, code 2, multipole 10 contacts, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, IP68.

Part Section Showing Internal Components


Cable Mount Plug

- ① Inner shell
- ② Male contact
- ③ Insulator
- ④ Latch sleeve
- ⑤ Fixed spacer
- ⑥ Outer shell
- ⑦ Cable collet
- ⑧ EMI spacer
- ⑨ Collet nut

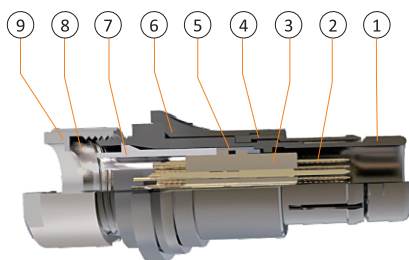

Fixed Receptacle

- ① Outer shell
- ② Hexagonal nut
- ③ Outer o-ring
- ④ Inner o-ring
- ⑤ Fixed spacer
- ⑥ Insulator
- ⑦ Female contact



Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibration	10-2000Hz, 15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96h	IEC 60512-6 test 11f
Protection index (mated)	IP68	IEC 60529
Climatical category	55/175/21	IEC 60068-1



Electrical

Characteristics		Value	Standard
Shielding efficiency	at 10 MHz	>65 dB	IEC 60619-1-3
	at 1 GHz	>45 dB	IEC 60619-1-3

Alignment key


00U	Code	1	0U				
	Guide mark	•	•	▼	■	*	*
	Plug front view						

1U	Code	1	2	3	4
	Guide mark	•	▼	■	*
	Plug front view				




RM-FSX straight plug

Reference		Dimensions(mm)					
Model	Series	A	B	C	D	Ød max	S1
RM-FSX	00U	26.4	18.4	10.4	7.4	3.5	/
RM-FSX	0U	28.7	18.7	12	9	4.5	8
RM-FSX	1U	37.7	26.6	15	11	7	12




RM-FG3 Sealed Panel Mount Receptacle
with ground tag




Reference		Dimensions(mm)						
Model	Series	A	B	e	L	P	S1	S2
RM-FG3	0U	13	14	M9*0.5	20	6.5	11	8


RM-U




RM-FGK Sealed Panel Mount Receptacle,
Straight PCB contacts



Reference		Dimensions(mm)						
Model	Series	A	B	e	L	P	S1	S2
RM-FGK	1U	18	18	M14*1.5	24.6	11	12	15




RM-FGX Sealed Panel Mount Receptacle



Reference		Dimensions(mm)						
Model	Series	A	B	e	L	P	S1	S2
RM-FGX	00U	10	10.9	M7*0.5	14.5	5	6.25	/
RM-FGX	0U	12	12	M9*0.5	15.7	6.5	7.9	11
RM-FGX	1U	16	16	M12*1.0	21	6.5	10	14



RM-PGX Sealed panel mount receptacle



Reference		Dimensions(mm)				
Model	Series	A	e	L	P	S1
RM-PGX	00U	10.4	M7*0.5	16.4	11.5	6.25
RM-PGX	0U	12.0	M9*0.5	17.3	11.0	8.2

Insulator Configuration

			Code	Contact No.	ØA(MM)	Solder contact	PCB straight contact	PCB elbow contact	Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
00			P02	2	0.5	●	●	●	1.00	0.95	5.0
			P03	3	0.5	●	●	●	0.80	0.95	3.0
			P04	4	0.5	●	●	●	0.80	0.65	2.0
			P05	5	0.35	●	●	●	0.70	1.00	1.5
			P07	7	0.3	●	●	●	0.60	0.75	1.0
0U			P02	2	0.9	●	●	●	1.70	1.30	9.2
			P03	3	0.9	●	●	●	1.30	1.30	8.2
			P04	4	0.7	●	●	●	1.20	1.20	5.5
			P05	5	0.7	●	●	●	1.00	0.80	5.2
			P07	7	0.5	●	●	●	1.00	0.80	2.0
			P09	9	0.5	●	●	●	1.10	0.80	1.7
			P10	10	0.5	●	●	●	0.90	0.80	1.3
			P13	13	0.4	●	●	●	0.40	0.40	1.5
			P16	16	0.5	●	●	●	0.80	1.25	1.5
1U			P05	5	0.9	●	●	●	1.25	1.15	9.0
			P06	6	0.7	●	●	●	1.05	1.2	7.0
			P07	7	0.7	●	●	●	0.95	1.05	7.0
			P08	8	0.7	●	●	●	0.95	1.15	5.0
			P10	10	0.7	●	●	●	0.90	1.50	2.5
			P12	12	0.5	●	●	●	0.80	1.2	2.0
			P16	16	0.5	●	●	●	0.80	1.25	1.5

● First choice alternative
○ Special order alternative

RM-U

RM-C Series

Advanced Miniature Small and Light Weight Connector

- Secure high performance push pull self-locking system/Easy-clean break away
- Compact design and light weight construction
- Sealed up to IP68 and hermetic
- The unique design of the contact core makes it safe and reliable in all environments
- 5 different alignment keys and polarized keying systems to avoid cross-interface
- Hermetic receptacle structure can be suitable for equipment requiring airtightness
- Robust and shock resistant designs
- 360° EMC shielded
- Available solder, PCB and right angle PCB contact



RM-C Push pull series

Plugs




FSX



FSE

Receptacles




FGK



FG8

Part Numbering System

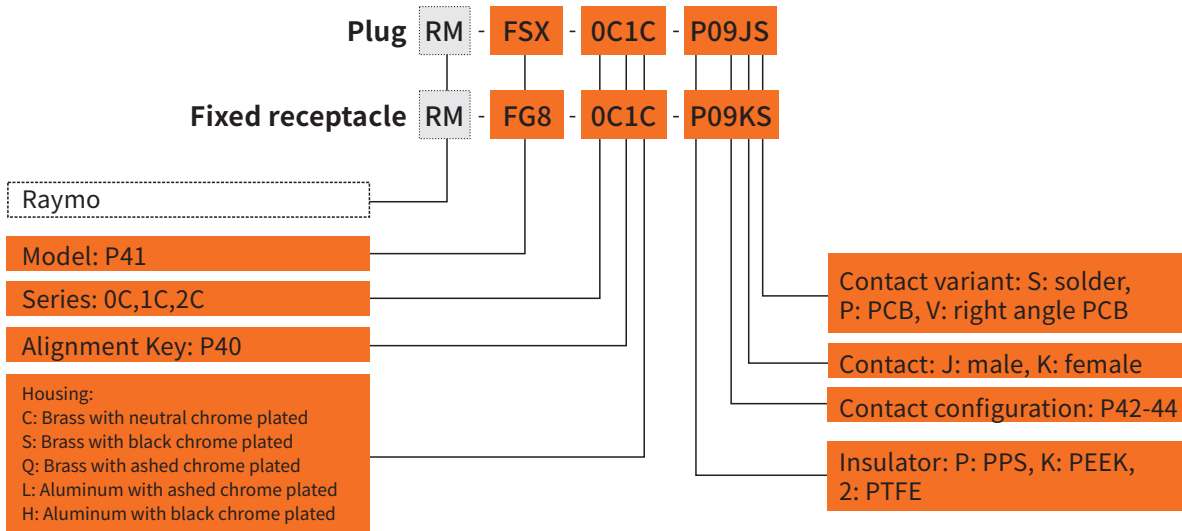

RM-C

Part No.Example

Straight plug with cable collet

RM-FSX-0C1C-P09JS= straight plug, 0C series, key 1, multipole 9 contacts, outer shell in neutral chrome -plated brass, PPS insulator, male solder contacts, IP68.


Fixed receptacle

RM-FG8-0C1C-P09KS= fixed receptacle, 0C series, key 1, multipole 9 contacts, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, IP68.

Part Section Showing Internal Components


Cable Mount Plug

- ① Inner shell
- ② Male contact
- ③ Insulator
- ④ Latch sleeve
- ⑤ Outer shell
- ⑥ O-ring
- ⑦ Collet nut
- ⑧ EMI ring

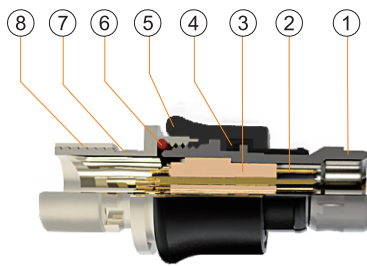

Fixed Receptacle

- ① Outer shell
- ② Hexagonal nut
- ③ Outer o-ring
- ④ Inside o-ring
- ⑤ Fixed spacer
- ⑥ Insulator
- ⑦ Female contact



Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibration	10-2000Hz, 15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96h	IEC 60512-6 test 11f
Protection index (mated)	IP68	IEC 60529
Climatical category	55/175/21	IEC 60068-1


RM-C


Electrical

Characteristics		Value	Standard
Shielding efficiency	at 10 MHZ	>95 dB	IEC 60619-1-3
	at 1 GHz	>80 dB	IEC 60619-1-3

Alignment Key

Key 1 is standard, if you need other keys, please indicated


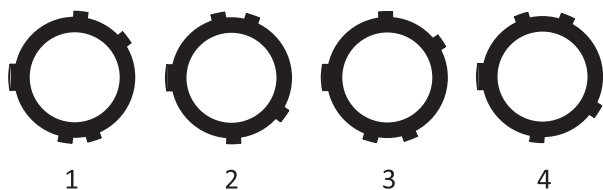




RM-FSX Cable mount plug



Reference		Dimensions(mm)							
Model	Series	L1	L2	L3	D1	D2	D3	S1	max cable diameter
RM-FSX	0C	31.4	21.4	10.4	11.9	14	12	6.5	5.0
RM-FSX	1C	33.2	22.4	11.4	13.9	15.9	13.9	8	6.5
RM-FSX	AC	32.7	22.7	11.7	14.5	16.5	14.5	10	8.0
RM-FSX	2C	35.2	23.2	12.2	17.6	19.6	17.6	12	10.0

RM-C




RM-FSE Cable mount plug

Reference		Dimensions(mm)				
Model	Series	L1	L2	D1	S1	max cable diameter
RM-FSC	0C	23.9	14.9	11.9	10	5.0
RM-FSC	1C	29.3	18.5	13.9	11	6.5
RM-FSC	AC	25.8	18.5	15.9	12	8.0
RM-FSC	2C	31.0	19.0	17.6	14	10.0



RM-FGK Sealed Panel Mount Receptacle, only can work mated with RM-FSC plug.

























Reference		Dimensions(mm)							
Model	Series	L1	L2	L3	X	D1	D2	M	S1
RM-FGK	0C	13.0	7.5	2.5	5	15.5	15.0	M11*0.75	10.1
RM-FGK	1C	15.5	8.5	3.0	4	18.5	17.9	M14*1.0	13.1
RM-FGK	AC	14.2	8.5	3.0	4	18.9	17.9	M14*1.0	13.1
RM-FGK	2C	17.5	9.5	3.0	4	20.8	21.9	M16*1.0	15.1



RM-FG8 Sealed Panel Mount Receptacle, only can work mated with RM-FSX plug.

Reference		Dimensions(mm)									
Model	Series	L1	L2	L3	L4	X	D1	D2	D3	M	S1
RM-FG8	0C	6.5	15.5	3.0	11.5	3.0	15.5	15.0	10.0	M11*0.75	10.1
RM-FG8	1C	8.0	19.0	4.0	14.5	3.5	18.5	17.9	12.0	M14*1.0	13.1
RM-FG8	AC	7.0	17.7	2.5	12.5	3.0	18.9	17.9	14.0	M14*1.0	13.1
RM-FG8	2C	8.0	21.5	4.0	15.0	3.0	20.8	21.9	15.0	M16*1.0	15.1



























Insulator Configuration

	solder male contact 	solder female contact 	Insulator	Contact No.	ØA(MM)	Contact type			Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
0C			P02	2	0.9	●	●	●	1.30	1.05	10.0
			P03	3	0.9	●	●	●	1.20	0.90	8.0
			P04	4	0.7	●	●	●	0.85	0.70	7.0
			P05	5	0.7	●	●	●	1.00	0.70	6.5
			P06	6	0.5	●	●	●	0.85	0.65	2.5
			P07	7	0.5	●	●	●	0.80	0.70	2.5
			P09	9	0.5	●	●	●	0.60	0.50	2.0
1C			P02	2	1.3	●	●	●	1.50	1.35	15.0
			P03	3	1.3	●	●	●	1.30	1.55	12.0
			P04	4	0.9	●	●	●	1.35	1.45	10.0
			P05	5	0.9	●	●	●	1.25	1.15	9.0

- First choice alternative
- Special order alternative

RM-C



















Insulator Configuration

	solder male contact 	solder female contact 	Insulator	Contact No.	ØA(MM)	Contact type			Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
1C			P06	6	0.7	●	●	●	1.05	1.20	7.0
			P07	7	0.7	●	●	●	0.95	1.05	7.0
			P08	8	0.7	●	●	●	0.95	1.15	5.0
			P10	10	0.5	●	●	●	0.90	1.50	2.5
			P14	14	0.5	●	●	●	0.80	1.20	2.0
			P16	16	0.5	●	●	●	0.80	1.25	1.5
2C			P02	2	2.0	●	●	●	2.10	1.75	30.0
			P03	3	1.6	●	●	●	2.40	1.85	17.0
			P04	4	1.3	●	●	●	1.85	1.85	15.0
			P05	5	1.3	●	●	●	1.75	1.60	14.0
			P06	6	1.3	●	●	●	1.35	1.45	12.0
			P07	7	1.3	●	●	●	1.75	1.60	11.0

- First choice alternative
- Special order alternative

RM-C

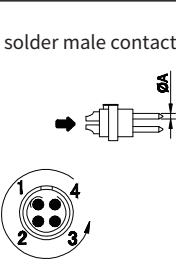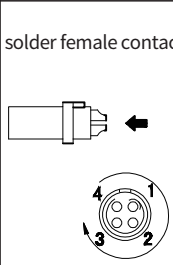Insulator Configuration


	solder male contact 	solder female contact 	Insulator	Contact No.	ØA(MM)	Contact type			Test voltage(contact -shell) k/V AC-rms	Test voltage(contact -contact)k/V AC-rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
2C			P08	8	0.9	●	●	●	1.50	1.25	10.0
			P10	10	0.9	●	●	●	1.45	1.30	8.0
			P12	12	0.7	●	●	●	1.25	1.35	7.0
			P14	14	0.7	●	●	●	1.15	1.35	6.5
			P16	16	0.7	●	●	●	0.95	1.25	6.0
			P18	18	0.7	●	●	●	0.85	1.20	5.5
			P19	19	0.7	●	●	●	0.95	1.25	5.0
			P26	26	0.5	●	●	●	0.95	1.30	2.0

- First choice alternative
- Special order alternative


RM-C

RM-C Easy clean series

Plugs




FA1




FAK

RM-C

Receptacles




FG8



PGX

Part Numbering System

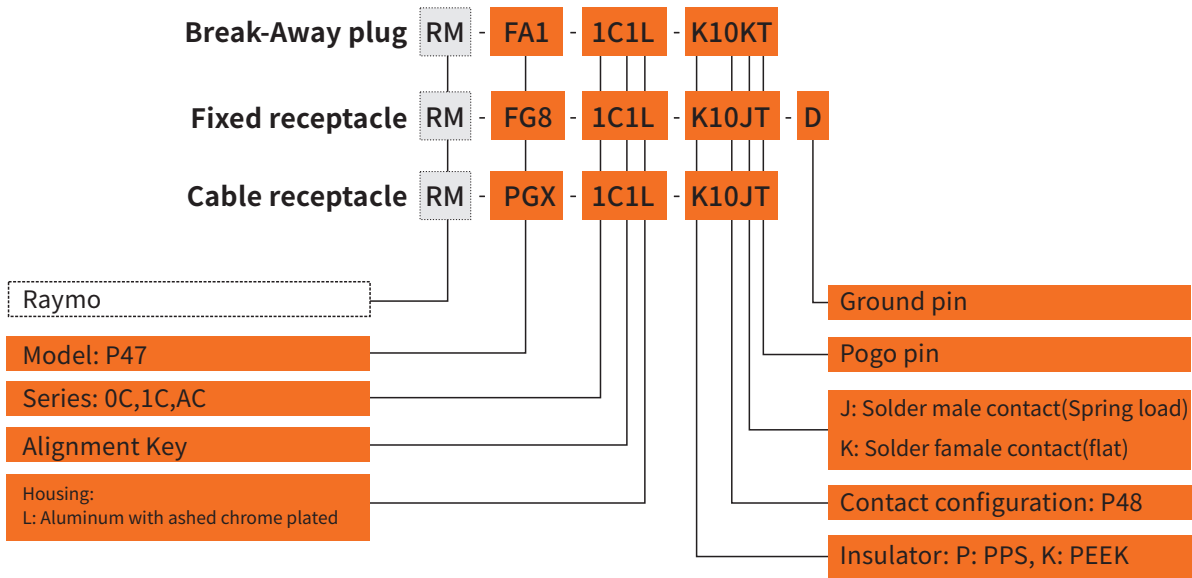

Part No.Example

Straight plug with cable collet

RM-FA1-1C1L-K10KT= Break-Away plug, 1C serie, key 1, 10 pins, aluminum with ashed chrome plated, PEEK insulator, solder female contact.

Fixed receptacle

RM-FG8-1C1L-K10JT-D= Fixed receptacle, 1C series, key 1, 10 pins, aluminum with ashed chrome plated, PEEK insulator, solder male contact, with ground pin.


Free cable mount receptacle

RM-PGX-1C1L-K10JT= Cable receptacle, 1C series, key 1, 10 pins, aluminum with ashed chrome plated, PEEK insulator, solder female contact.

Part Section Showing Internal Components


Cable Mount Plug



- ① Male contact
- ② Insulator
- ③ Latch sleeve
- ④ Outer shell
- ⑤ O-ring



Fixed Receptacle

- ① Outer shell
- ② Female contact
- ③ Outer o-ring
- ④ Insulator
- ⑤ Collet nut
- ⑥ EMI ring







RM-FA1 Break-Away cable plug



Reference		Dimensions(mm)					
Model	Series	L1	L2	L3	D1	S2	maxØ
RM-FA1	0C	23.5	3	15	11.9	9	5.5
RM-FA1	1C	26.6	3.5	18.4	13.9	11	6.5
RM-FA1	AC	27.5	3.5	18.5	15.9	12	8.0

RM-C




RM-FAK Break-Away fixed plug

Reference		Dimensions(mm)					
Model	Series	L1	L2	L3	D1	S2	M
RM-FAK	0C	15	6.4	2.5	13.2	9.2	M10*0.5
RM-FAK	1C	15	8.0	2.5	15.0	10	M11*0.75
RM-FAK	AC	16.5	9.7	4.0	17.9	13	M14*0.75



RM-FG8 Fixed receptacle













Reference		Dimensions(mm)									
Model	Series	L1	L2	L3	L4	Xmax	D1	D2	D3	S1	M
RM-FG8	0C	6.5	16.3	3	11.5	3.0	15.5	15.0	10	10	M11*0.75
RM-FG8	1C	8.0	14.9	4	10.5	3.5	18.5	17.9	12	13	M14*1.0
RM-FG8	AC	7.0	17.7	2.5	12.5	3.0	18.9	17.9	14	13	M14*0.75



RM-PGX Free cable mount receptacle

Reference		Dimensions(mm)							
Model	Series	L1	L2	L3	L4	D1	D2	S1	MaxØ
RM-PGX	0C	25	13	1.5	5.8	11.9	10.5	9	5.6
RM-PGX	1C	27	12.1	1.5	5.8	13.9	12.5	11	6.5
RM-PGX	AC	27	12	1.5	5.8	15.9	14.5	12	8

Insulator Configuration

	solder male contact 	solder female contact 	Insulator	Contact No.	Ø A (MM)	Contact type			Test voltage (contact -shell) k/v AC-rms	Test voltage (contact -contact) k/v AC-rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
0C			K04	4	0.6	●	●	○	0.6	0.6	2.0
			K07	7	0.6	●	●	○	0.6	0.6	2.0
1C			K10	10	0.6	●	●	○	0.6	0.6	2.0
			K16	16	0.6	●	●	○	0.6	0.6	2.0
AC			K19	19	0.6	●	●	○	0.6	0.6	2.0

- First choice alternative
- Special order alternative

RM-C

RM-G Series

Advanced Miniature Small and Light Weight Connector

- Secure high performance in quick release system
- Compact design and light weight construction
- Sealed up to IP68 and hermetic
- The unique design of the contact core makes it safe and reliable in all environments
- 5 different alignment keys and Polarized Keying System to avoid cross-interface
- Hermetic receptacle structure can be suitable for equipment requiring airtightness
- Robust and shock resistant designs
- 360° EMC shielded
- Available solder, PCB and right angle PCB contact




RM-G Series

Plugs




FSE

Receptacles




FGK



PGX

Part Numbering System

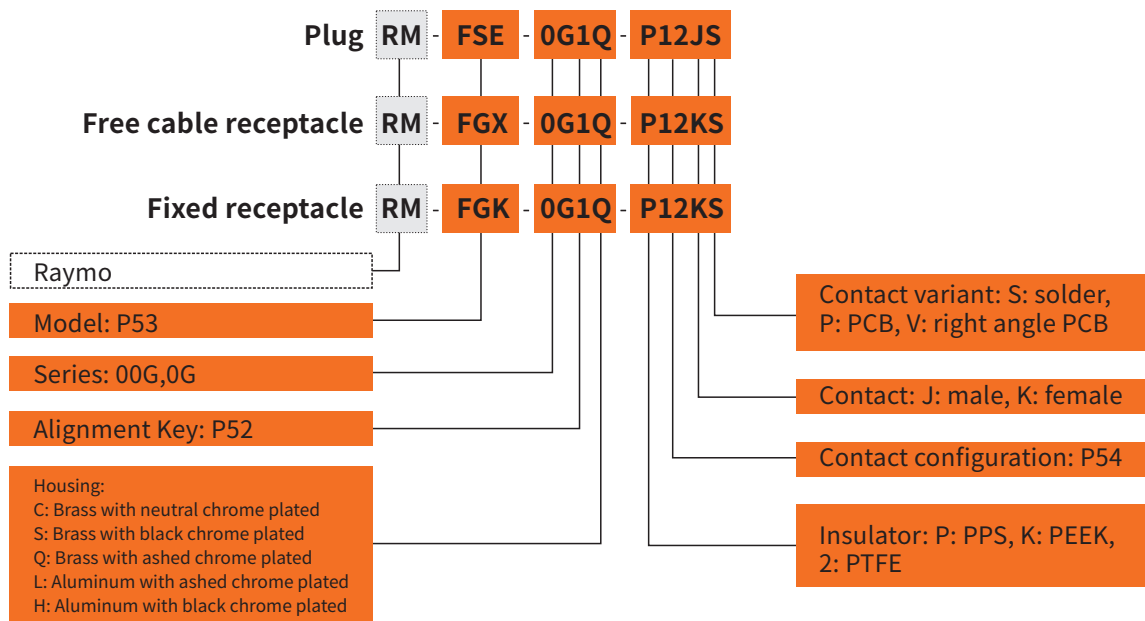

RM-G

Part No.Example

Straight plug

RM-FSE-0G1Q-P12JS=straight plug, 0G series, key 1, multipole 12 contacts, outer shell in gun chrome-plated brass, PPS insulator, male solder contacts, IP68.

Free receptacle

RM-PGX-0G1Q-P12KS=free cable receptacle, 0G series, key 1, multipole 12 contacts, outer shell in gun chrome-plated brass, PPS insulator, female solder contacts, IP68.


Fixed receptacle

RM-FGK-0G1Q-P12KS=fixed receptacle, 0G series, key 1, outer shell in gun chrome-plated brass, PPS insulator, female solder contacts, IP68.

Part Section Showing Internal Components


Straight Plug

- ① Outer shell
- ② Male contact
- ③ O-ring
- ④ Insulator
- ⑤ Retaining ring
- ⑥ Collet nut
- ⑦ EMI ring



Fixed Receptacle

- ① Outer shell
- ② Hexagonal nut
- ③ Fixed spacer
- ④ O-ring
- ⑤ Insulator
- ⑥ Female contact
- ⑦ Ground tag



Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibration	10-2000Hz, 15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96hrs	IEC 60512-6 test 11f
Protection index (mated)	IP68	IEC 60529
Climatical category	55/175/21	IEC 60068-1


RM-G



Electrical

Characteristics		Value	Standard
Shielding efficiency	at 10 MHZ	>65 dB	IEC 60619-1-3
	at 1 GHz	>45 dB	IEC 60619-1-3

Alignment Key



Key 1 is standard, if you need other keys, please indicated

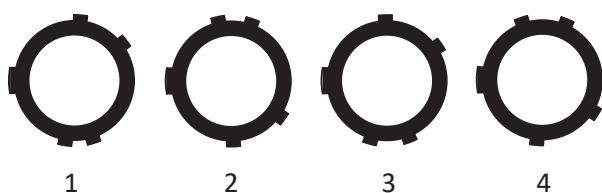



RM-FSE straight plug



Reference		Dimensions(mm)					
Model	Series	A	B	P	L	S2	
RM-FSE	00G	9.8	8.0	7.3	20.0	8.0	
RM-FSE	0G	12.8	10.5	7.3	20.4	10.0	



RM-FGK Sealed Back Panel Mount Receptacle with ground tag

RM-G

Reference		Dimensions(mm)						
Model	Series	A	N	e	E	L	S1	
RM-FGK	00G	9.9	8.0	M7*0.5	4.0	15.6	6.5	
RM-FGK	0G	13.2	8.0	M10*0.5	3.5	15.1	9.0	



RM-PGX free cable receptacle

Reference		Dimensions(mm)		
Model	Series	A	N	S1
RM-PGX	0G	12.9	18.5	9.6

Insulator Configuration

solder male contact		solder female contact		Code	Contact No.	ØA(MM)	Solder contact	PCB straight contact	PCB elbow contact	Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
00G			P04	2	2	●	●	○	0.75	0.75	3.0	
				2	2	●	●	○	0.75	0.75	1.0	
			P07	7	0.3	●	●	○	0.75	0.75	1.0	
0G			P09	6	0.7	●	●	○	0.75	0.75	5.0	
				3	0.3	●	●	○	0.75	0.75	1.0	
			P12	2	0.7	●	●	○	0.75	0.75	5.0	
				10	0.3	●	●	○	0.75	0.75	1.0	
			P16	16	0.3	●	●	○	0.75	0.75	1.0	

- First choice alternative
- Special order alternative

RM-G



RM-A Series


Miniature High-speed Data Transmission Connector

- Push pull self-latching system
- Excellent waterproof performance IP68(20m/24h)
- 360° EMC Shielded
- Receptacle with vacuum sealing structure, suitable for sealing equipment
- 4 codes alignment key and polarized keying system to avoid cross-interface




RM-A Series


Plugs



PSX




PSA




PSM


Receptacles




FGK




FGA




FGM




ECG



ECA




ECM



PHX




PHA



PHM

Part Numbering System

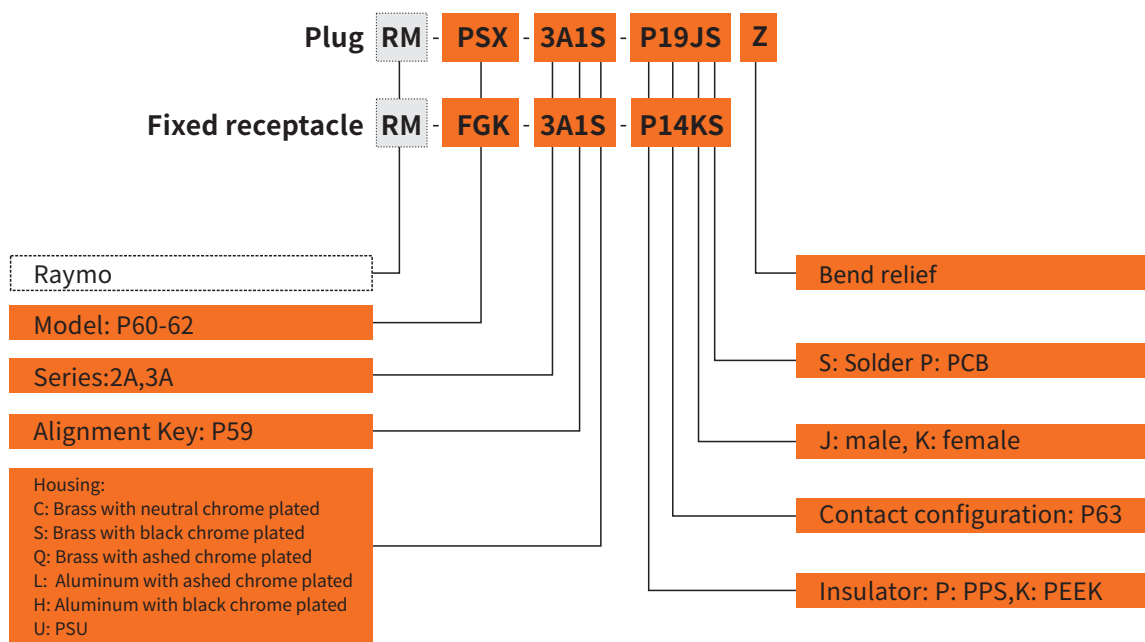

RM-A

Part No.Example

Straight plug

RM-PSX-3A1S-P19JSZ= Straight cable mount plug with key(1), 3A series, 19 contacts, outer shell in black chrome-plated brass, PPS insulator, male solder contacts, nut for a black bend relief.


Free receptacle

RM-FGK-3A1S-P19KS= Fixed panel mount receptacle with key (1), 3A series, 19 contacts, outer shell in black chrome-plated brass, PPS insulator, female solder contacts.

Part Section Showing Internal Components


Straight Plug

- ① Outer shell
- ② Inner shell
- ③ Male contact
- ④ Insulator
- ⑤ Latch sleeve
- ⑥ Inner O-ring
- ⑦ Spring
- ⑧ Insulator carrier
- ⑨ Back O-ring
- ⑩ Back nut
- ⑪ Bend relief back nut

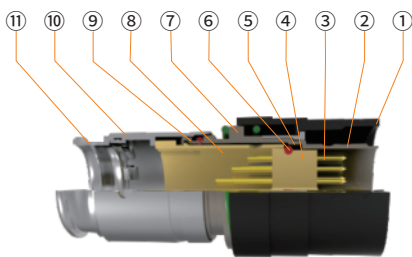

Fixed Receptacle

- ① Outer shell
- ② Insulative ball
- ③ O-ring
- ④ Retainer ring
- ⑤ Insulator
- ⑥ O-ring
- ⑦ Hexagonal nut
- ⑧ O-ring
- ⑨ Insulator carrier
- ⑩ Female contact




High-speed data transfer

Ethernet 8-PIN



A unique robust and sealed miniature connector for Ethernet applications in harsh environments.

- AWG24, compatible with long angle standard Ethernet cables
- Symmetrical hermaphroditic contact block
- 0.5 mm contact




USB 3.0 9-PIN



Optimized design for full USB 3.0 performance. Successfully tested to the full S-parameter standards with cables up to 2m.

- Advanced power contacts
- Hermaphroditic contact block
- 0.5 mm contact

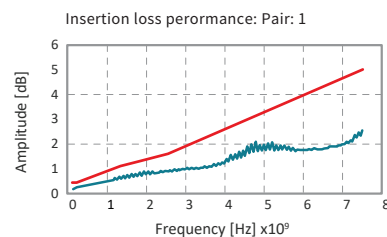

RM-A



		06-4 pin	06-12 pin	08-8 pin	08-09 pin	08-19 pin	08-24 pin	
USB 2.0		YES	YES	YES	YES	YES	YES	Full spec up to 2 m cable
USB 3.0		NO	YES	NO	YES	YES	YES	Application dependent
		NO	NO	No	YES	NO	NO	Full spec up to 2 m cable
ETHERNET 10 Gbit/		NO	YES	YES	No	YES	YES	Ethernet AWG 28
		NO	NO	YES	No	NO	NO	Ethernet AWG 24
HDMI		NO	NO	No	No	YES	YES	HDMI 1.4

Technical informaton

Environmental & Mechanical data

Characteristic	Performance	Standrd
Sealing performance mated and unmated	IP68, 20m/24h water sealing <10 ⁶ mbar. l/sec gas sealing	IEC 60529 IEC 60068-2-17 Test Qk, Method 3
Operatng temperature range	-40°C to +135°C	IEC 60512-6-1 IEC 60068-2-14-Nb
Corrosion resistance mated	96h	IEC 60068-2-11 Test Ka; MIL-STD-202 Method 101; EIA-364-26
Endurance	5000 matng cycles.Preserved mechanical and electrical functionality. Normal wear will appear.	IEC 60512-9-1
Vibraton (Screw-locking version only)	10 to 2000Hz,1.5 mm or 15 g, 12 sweep cycles per axis, 20 minutes per 10-2000-10 Hz sweep cycle, no discontinuity >1 us	MIL-STD-202 G Method 204D Condit
Unlocking Force (Quick-release version only)	Size 06 = Typical 25 N ±40% Size 08 = Typical 35 N ±40%	
Shock	300g	MIL-STD-202 G Method 213

Electrical data


Characteristic	Performance	Standard
Contact resistance	5mΩ(typical value)	IEC 60512-2-1-2a; IEC 60512-2-2-2b
Shell resistance	Anthractite <5mΩ(Cabled)	IEC 60512-2-6-2f
	Black <50mΩ(Cabled)IEC	IEC 60512-2-6-2f
Insulaton resistance	10 ¹⁰ Ω	IEC 60512-3-1-3a
Shielding effeccveness	360° shielded	-

RM-A


Mechanical keys(A Series)

2A	Size	1	2	3	4
Rceptacles					


3A	Size	1	2	3	4
Rceptacles					




RM-PSX Push pull locking cable mount plug, IP68, multiples keys



Reference		Dimensions(mm)				
Model	Series	Ød	ØD	A	B	C
RM-PSX	2A	8.5	9.9	10.1	12.8	25
RM-PSX	3A	10.5	12.9	10.1	12.8	25




RM-PSA Quick release cable mount plug, IP68, multiples keys




Reference		Dimensions(mm)				
Model	Series	Ød	ØD	A	B	C
RM-PSA	2A	8.5	9.9	10.1	13.6	25
RM-PSA	3A	10.5	12.9	10.1	13.6	25




RM-PSM Screw locking cable mount plug, IP68, multiples keys



Reference		Dimensions(mm)				
Model	Series	Ød	ØD	A	B	C
RM-PSM	2A	8.5	9.9	10.1	14.0	25
RM-PSM	3A	10.5	12.9	10.1	14.0	25




RM-PHX Push pull locking cable receptacle, IP68, multiples keys




Reference		Dimensions(mm)				
Model	Series	Ød	ØD	A	B	C
RM-PHX	2A	8.5	9.9	10.1	13.7	25
RM-PHX	3A	10.5	11.6	10.1	13.7	25


RM-A




RM-PHA Quick release, cable mount socket, IP68, multiples keys



Reference		Dimensions(mm)				
Model	Series	Ød	ØD	A	B	C
RM-PHA	2A	8.5	9.9	10.1	13.7	25
RM-PHA	3A	10.5	12.9	10.1	13.7	25




RM-PHM Screw locking, cable mount receptacle, IP68, multiples keys




Reference		Dimensions(mm)					
Model	Series	Ød	ØD	A	B	C	M
RM-PHM	2A	8.5	9.9	10.1	13.7	25	M8*2
RM-PHM	3A	10.5	12.9	10.1	13.7	25	M10*2


RM-A




RM-FGK Push pull locking, panel mount receptacle, IP68, back panel mounting




Reference		Dimensions(mm)						
Model	Series	Ød	ØD1	M	A	L	E max	S1
RM-FGK	2A	8.0	10	M8.5*0.35	7.6	19.1	3.0	8
RM-FGK	3A	10.0	12	M10.5*0.5	9.1	20.6	3.0	10




RM-ECG Screw locking, panel mount receptacle, IP68, back panel mounting




Reference		Dimensions(mm)						
Model	Series	Ød	ØD1	M	A	L	E max	S1
RM-FGK	2A	8.0	11.4	M8.5*0.35	7.6	19.1	3.0	10
RM-FGK	3A	10.0	13.7	M10.5*0.5	9.1	20.6	3.0	12




RM-FGA Push pull locking, panel mount receptacle, IP68, back panel mounting




Reference		Dimensions(mm)						
Model	Series	Ød	ØD1	M	A	L	E max	S1
RM-FGA	2A	7.8	10.0	M8.5*0.35	7.6	19.1	3.0	8
RM-FGA	3A	9.8	12.0	M10.5*0.5	9.1	20.6	3.0	10




RM-ECA screw locking, panel mount receptacle, IP68, front or back panel mounting




Reference		Dimensions(mm)						
Model	Series	Ød	ØD1	M	A	L	E max	S1
RM-ECA	2A	7.8	11.4	M8.5*0.35	7.6	19.1	2.3	10
RM-ECA	3A	9.8	13.7	M10.5*0.5	9.1	20.6	2.3	12




RM-FGM Push pull locking, panel mount receptacle, IP68, back panel mounting



Reference		Dimensions(mm)						
Model	Series	ØD1	M1	M2	A	L	E max	S1
RM-FGM	2A	10	M8.5*0.35	M8*2	7.6	19.1	3.0	8
RM-FGM	3A	12	M10.5*0.5	M10*2	9.1	20.6	3.0	10



RM-ECM Screw locking, panel mount socket, IP68, front or backpanel mounting



Reference		Dimensions(mm)						
Model	Series	ØD1	M1	M2	A	L	E max	S1
RM-ECM	2A	11.4	M8.5*0.35	M8*2	7.6	19.1	2.3	10
RM-ECM	3A	13.7	M10.5*0.5	M10*2	9.1	20.6	2.3	12

RM-A

Insulator Configuration

		Insulator	Contact No.	ØA(MM)	Solder contact	PCB straight contact	PCB elbow contact	Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
2A		P04	2	0.5	●	●	○	1.20	1.90	1.0
			2	1.3						10
		P12	10	0.5	●	●	○	0.90	1.20	1.0
			2	0.5						5.0
3A		P08	8	0.5	●	●	○	1.60	2.20	3.8
				0.5						
		P09	7	0.5	●	●	○	1.20	1.80	1.0
			2	0.5						5.0
		P19	15	0.5	●	●	○	0.90	1.50	1.0
			4	0.5						5.0
		P24	20	0.5	●	●	○	0.90	1.20	1.0
			4	0.5						5.0

- First choice alternative
- Special order alternative

RM-A



Vehicle Equipment Application

RM-B Series

Metal Push Pull Self-locking connector

- Secure high performance push pull self-locking system
- High pin density contributing to equipment miniaturization
- Alignment Key and Polarized Keying System to avoid cross-interface
- 360° EMC shielded
- Robust and shock resistant designs
- Functional in a wide temperature range from -50°C to +250°C
- Available solder, PCB and right angle PCB contact



RM-B Series

Plugs




FGG




FEG




FFG




FNG



FHG



FPG



FSG




FAG


Receptacles



EGG



ECG




ECG



EEG




EFG



EHG



EPG



EXG



HGG



HHG



HEG



RGG




PFG



PHG

Part Numbering System

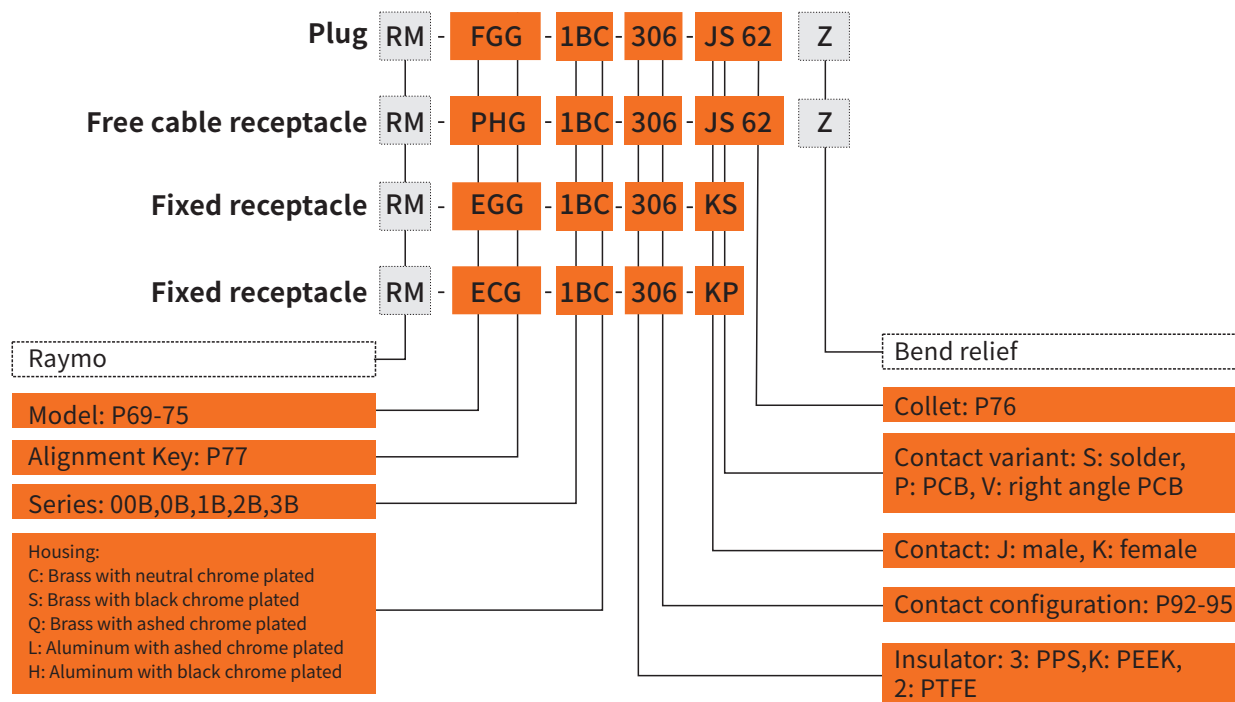

RM-B

Part No.Example

Straight plug with cable collet

RM-FGG-1BC-306-JS62Z= straight plug with key (G) and cable collet, 1B series, multipole 6 contacts, outer shell in natural chrome-plated brass, PPS insulator, male solder contacts, collet for 5.2-6.2mm diameter cable, nut for fitting a bend relief.

Free cable mount receptacle

RM-PHG-1BC-306-KS62= free cable receptacle with key (G) and cable collet, 1B series, multipole 6 contacts, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, collet for 5.2-6.2 mm diameter cable.


Fixed receptacle

RM-ECG-1BC-306-KP= fixed receptacle with two screw nuts, nut fixing, with key (G),1B series, multipole 6 contacts,outer shell in natural chrome natural-plated brass, PPS insulator, female PCB contacts.

Part Section Showing Internal Components


Cable Mount Plug

- ① Outer shell
- ② Latch sleeve
- ③ Insulator
- ④ Male contact
- ⑤ Split insert carrier A/B
- ⑥ Cable collet
- ⑦ Collet nut

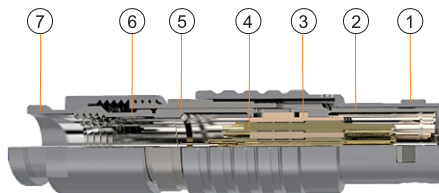

Fixed Receptacle

- ① Outer shell
- ② Retaining ring
- ③ Hexagonal nut
- ④ Locking washer
- ⑤ Insulator
- ⑥ Female contacts



Technical Characteristics

Mechanical and Climatrical


Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibration	10-2000Hz, 15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96hrs	IEC 60512-6 test 11f
Protection index (mated)	IP50	IEC 60529
Climatrical category	55/175/21	IEC 60068-1

Electrical

Characteristics		Value	Standard
Shielding efficiency	at 10 MHz	>75 dB	IEC 60619-1-3
	at 1 GHz	>40 dB	IEC 60619-1-3


RM-B

RM-FGG Cable Mount Straight Plug, nut for fitting a bend relief



Reference		Dimensions(mm)				
Model	Series	A	L	M	S1	S2
RM-FGG	00B	6.4	28.5	20	5.5	6.0
RM-FGG	0B	9.5	35.0	25.0	8.0	8.0
RM-FGG	1B	12.0	42.0	31.0	10.0	9.0
RM-FGG	2B	15.0	49.0	37.0	13.0	12.0
RM-FGG	3B	17.0	58.5	43.5	15.0	15.0


RM-FGG Cable Mount Straight Plug



Reference		Dimensions(mm)				
Model	Series	A	L	M	S1	S2
RM-FGG	00B	6.4	28.5	20.5	5.5	5.0
RM-FGG	0B	9.5	36.0	26.0	8.0	7.0
RM-FGG	1B	12.0	43.0	32.0	10.0	9.0
RM-FGG	2B	15.0	50.0	38.0	13.0	12.0
RM-FGG	3B	17.0	58.0	43.0	15.0	14.0


RM-B

RM-FEG Cable Mount Straight Plug, front sealed, nut for fitting a bend relief





Reference		Dimensions(mm)				
Model	Series	A	L	M	S1	S2
RM-FEG	0B	11.0	35.0	25.0	8.0	8.0
RM-FEG	1B	13.5	42.0	33.0	10.0	9.0
RM-FEG	2B	16.5	48.0	36.0	13.0	12.0
RM-FEG	3B	19.0	56.0	41.5	15.0	15.0

RM-FFG Straight plug, non-latching





Reference		Dimensions(mm)				
Model	Series	A	L	M	S1	S2
RM-FFG	00B	6.4	36.5	28.5	5.5	5.0
RM-FFG	0B	9.5	35.0	25.0	8.0	8.0
RM-FFG	1B	12.0	42.0	31.0	10.0	9.0
RM-FFG	2B	15.0	49.0	37.0	13.0	12.0
RM-FFG	3B	18.0	56.5	41.5	15.0	15.0



RM-FNG Straight plug, with Lanyard



Reference		Dimensions(mm)						
Model	Series	A	B	L	M	N	S1	S2
RM-FNG	0B	9.5	15.95	34.62	24.3	140	8.0	8.0
RM-FNG	1B	12.0	18.0	43.0	32.0	140	10.0	9.0
RM-FNG	2B	15.0	21.0	49.0	37.0	160	13.0	12.0
RM-FNG	3B	18.0	25.0	58.0	43.0	190	15.0	14.0



RM-FHG Cable Mounted Elbow Plug, 90°



Reference		Dimensions(mm)							
Model	Series	A	D	H	L	M	S1	S2	S3
RM-FHG	0B	11.0	6.5	26.0	31.6	21.6	10.0	8.0	8.0
RM-FHG	1B	13.5	8.0	30.5	36.0	25.0	11.0	9.0	10.0
RM-FHG	2B	16.5	9.0	40.0	37.7	25.6	14.0	12.0	13.0
RM-FHG	3B	19.0	10.0	37.0	50.0	35.0	17.0	14.0	15.0

RM-B




RM-FAG Panel Mount Fixed Plug, non-latching

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	N	S1	S3
RM-FAG	00B	8.0	10.2	M7*0.5	2.9	18.1	9.0	15.0	6.3	9.0
RM-FAG	0B	10.0	12.4	M9*0.6	4.2	20.8	11.5	18.9	8.2	11.0
RM-FAG	1B	14.0	15.8	M12*1.0	5.4	25.2	12.5	21.6	10.5	14.0
RM-FAG	2B	18.0	19.2	M15*1.0	6.0	28.7	13.8	23.9	13.5	17.0
RM-FAG	3B	22.0	25.0	M18*1.0	5.8	32.1	17.0	30.2	16.5	22.0




RM-FPG Cable Mounted Elbow Plug, 90°

Reference		Dimensions(mm)						
Model	Series	A	H	L	M	S1	S2	S3
RM-FPG	00B	8.5	18.0	24.5	16.5	7.5	6	6
RM-FPG	0B	9.5	23.0	30.0	30.0	9.0	8	8
RM-FPG	1B	12.0	29.0	36.0	36.0	11.0	9	10
RM-FPG	2B	15.0	35.0	41.5	41.5	13.5	12	13

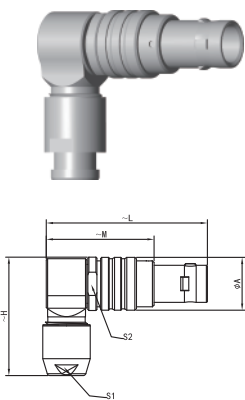

RM-FSG 90° elbow plug, key(G) or key(A...M and R), bend relief.


Reference		Dimensions(mm)					
Model	Series	A	H	L	M	S1	S2
RM-FSG	00B	8.0	18.1	24.8	16.8	5.0	7.0
RM-FSG	0B	10.0	22.4	30.3	20.3	7.0	9.0
RM-FSG	1B	12.0	26.4	36.5	25.5	9.0	11.0
RM-FSG	2B	16.5	34.5	44.0	32.0	12.0	15.0



RM-EGG Panel Mount Fixed Receptacle


Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	N	S1	S3
RM-EGG	00B	8.0	10.2	M7*0.5	6.0	15.5	1.0	13.7	6.3	9.0
RM-EGG	0B	10.0	12.4	M9*0.6	7.0	20.7	1.2	19.1	8.2	11.0
RM-EGG	1B	14.0	15.8	M12*1.0	7.5	23.0	1.5	21.1	10.5	14.0
RM-EGG	2B	18.0	19.2	M15*1.0	8.5	26.7	1.8	24.6	13.5	17.0
RM-EGG	3B	21.8	25.0	M18*1.0	11.5	37.1	2.0	24.6	16.5	22.0

RM-B




RM-ECG Panel Mount Receptacle with two screw nuts

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	N	S1	S3
RM-ECG	00B	10.0	10.2	M7*0.5	4.3	13.7	2.5	13.7	6.3	9.0
RM-ECG	0B	12.0	12.4	M9*0.6	5.5	20.7	2.5	16.4	8.2	11.0
RM-ECG	1B	16.0	15.8	M12*1.0	6.0	23.0	3.5	19.8	10.5	14.0
RM-ECG	2B	20.0	19.2	M15*1.0	6.5	26.7	3.5	20.2	13.5	17.0
RM-ECG	3B	24.0	25.0	M18*1.0	9.0	30.7	4.5	25.8	16.5	22.0

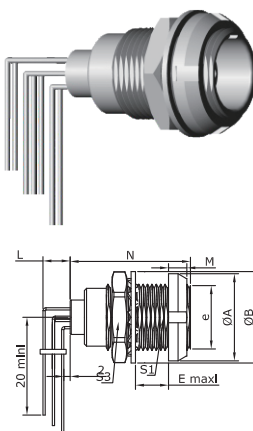



RM-ECG Panel Mount Fixed Receptacle with two screw nuts, elbow 90° contact for printed circuit

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	M	N	S1	S3	
RM-ECG	0B	12.0	12.4	M9*0.6	5.5	2.5	18.3	8.2	11.0	
RM-ECG	1B	16.0	15.8	M12*1.0	6.0	3.5	20.3	10.5	14.0	
RM-ECG	2B	20.0	19.2	M15*1.0	6.5	3.5	22.3	13.5	17.0	
RM-ECG	3B	24.0	25.0	M18*1.0	9.0	4.5	25.8	16.5	22.0	



RM-EEG Panel Mount Fixed Receptacle, back panel mounting



Reference		Dimensions(mm)									
Model	Series	A	B	e	E	L	M	N	P	S1	S3
RM-EEG	00B	10	9.7	M7*0.5	2.3	15.7	2.5	13.5	6.0	6.3	7.5
RM-EEG	0B	12	12.5	M9*0.6	2.4	20.7	2.5	19.1	6.3	8.2	9.0
RM-EEG	1B	16	16.0	M12*1.0	6.5	23.0	3.5	21.1	11.0	10.5	13.0
RM-EEG	2B	20	20.0	M15*1.0	3.0	26.7	3.5	24.6	9.0	13.5	15.0
RM-EEG	3B	24	25.0	M18*1.0	3.0	30.7	4.5	25.2	12.0	16.5	20.0



RM-EHG Panel Mount Fixed Receptacles, protruding shell



Reference		Dimensions(mm)									
Model	Series	A	B	e	E	L	M	N	S1	S3	
RM-EHG	0B	10.0	12.4	M9*0.6	2.0	19.5	12.5	19.1	8.2	11.0	
RM-EHG	1B	14.0	15.8	M12*1.0	4.0	21.7	12.0	21.1	10.5	14.0	
RM-EHG	2B	18.0	19.2	M15*1.0	5.1	22.7	12.5	24.6	13.5	17.0	

RM-B





RM-HGG Panel Mount Sealed Fixed Receptacle, front panel mounting

Reference		Dimensions(mm)									
Model	Series	A	B	e	E	L	M	S1	S3		
RM-HGG	00B	11.0	10.2	M7*0.5	8.0	18.0	2.5	6.3	9.0		
RM-HGG	0B	13.0	12.4	M9*0.6	7.0	21.5	3.0	8.2	11.0		
RM-HGG	1B	18.0	15.8	M12*1.0	7.0	26.6	4.5	10.5	14.0		
RM-HGG	2B	20.0	19.2	M15*1.0	8.0	31.6	4.0	13.5	17.0		





RM-HHG Panel Mounted Sealed Fixed Receptacle, front panel mounting

Reference		Dimensions(mm)									
Model	Series	A	B	e	E	L	M	S1	S3		
RM-HHG	0B	13.0	12.4	M9*0.6	7.0	23.2	4.8	8.2	11.0		
RM-HHG	1B	18.0	15.8	M12*1.0	7.0	30.3	5.2	10.5	14.0		
RM-HHG	2B	20.0	19.2	M15*1.0	8.0	35.6	6.0	13.5	17.0		



RM-HEG Panel Mount Sealed Fixed Receptacle, back panel mounting



Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	P	S1	S3
RM-HEG	0B	12.0	13.0	M9*0.6	2.5	20.2	2.5	9.0	8.2	-
RM-HEG	1B	16.0	18.0	M12*1.0	5.5	26.6	3.5	11.0	10.5	-
RM-HEG	2B	20.0	20.0	M15*1.0	6.5	31.6	3.5	9.6	13.5	15.0



RM-PFG Panel Mount Cable Receptacle, back panel mounting



Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	S1	S2	S3
RM-PFG	0B	12.0	12.4	M9*0.6	5.0	35.5	2.5	8.2	7.0	11.0
RM-PFG	1B	16.0	15.8	M12*1.0	5.0	40.7	3.5	10.5	9.0	14.0
RM-PFG	2B	20.0	19.2	M15*1.0	6.5	47.0	3.5	13.5	12.0	17.0
RM-PFG	3B	24.0	25.0	M18*1.0	9.0	56.0	4.5	16.5	14.0	22.0

RM-B



RM-PHG Cable Mount Receptacle


Reference		Dimensions(mm)			
Model	Series	A	L	S1	S2
RM-PHG	0B	9.5	35.5	8.0	7.0
RM-PHG	1B	12.5	40.5	10.0	9.0
RM-PHG	2B	16.5	47.0	13.0	12.0
RM-PHG	3B	19.0	56.0	15.0	14.0

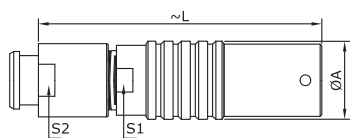

RM-PHG Cable Mount Receptacle, nut for fitting a bend relief

Reference		Dimensions(mm)			
Model	Series	A	L	S1	S2
RM-PHG	0B	9.5	35.5	8.0	8.0
RM-PHG	1B	12.5	40.5	10.0	9.0
RM-PHG	2B	16.5	47.0	13.0	12.0
RM-PHG	3B	19.0	56.0	15.0	14.0


Technical Characteristics

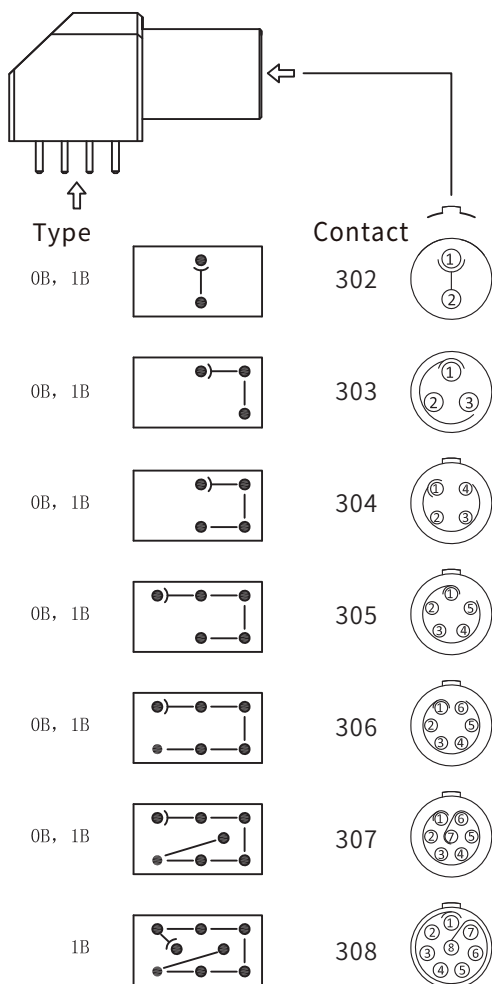


Electrical

Model	Shell Size	Contact No.	Test voltage (contact-shell)k/v	Test voltage (contact-shell)k/v	Rated current/A
EPG-EXG	0B	302	1.45	1.20	4.5
EPG-EXG	0B	303	1.70	1.60	4.5
EPG-EXG	0B	304	1.30	1.10	4.5
EPG-EXG	0B	305	1.25	1.20	4.5
EPG-EXG	0B	306	1.25	1.20	2.5
EPG-EXG	0B	307	1.00	1.20	2.0
EPG-EXG	1B	302	1.70	1.45	4.5
EPG-EXG	1B	303	1.60	1.85	4.5
EPG-EXG	1B	304	1.70	1.80	4.5
EPG-EXG	1B	305	1.30	1.55	4.5
EPG-EXG	1B	306	1.35	1.45	4.5
EPG-EXG	1B	307	1.45	1.45	2.0
EPG-EXG	1B	308	1.30	1.30	2.0
EPG	1B	314	1.00	1.30	1.0

RM-B






RM-EPG Elbow (90°) Receptacle for printed circuit, key (G) or keys(A..F) (solder or screw fixing)

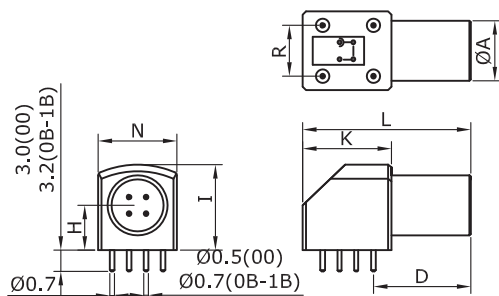


Model	Dimensions(mm)							
	A	D	H	I	K	L	N	R
EPG.0BC.302.KP	9.0	14.6	6.7	12.6	13.3	25.0	11.7	7.62
EPG.0BC.303.KP								
EPG.0BC.304.KP								
EPG.0BC.305.KP								
EPG.0BC.306.KP								
EPG.1BC.302.KP	11.0	16.6	7.5	14.0	13.3	27.0	12.6	7.62
EPG.1BC.303.KP								
EPG.1BC.304.KP								
EPG.1BC.305.KP								
EPG.1BC.306.KP								
EPG.1BC.307.KP								
EPG.1BC.308.KP								






RM-EXG Elbow (90°) Receptacle for printed circuit, (solder or screw fixing)
back panel mounting



Model	Dimensions(mm)												
	A	B	D	e	E	H	I	K	L	M	N	R	S3
EXG.0BC.302.KP	12	12.4	14.6	M9*0.6	6	6.7	12.6	13.3	25	2.5	11.7	7.62	11
EXG.0BC.303.KP													
EXG.0BC.304.KP													
EXG.0BC.305.KP													
EXG.0BC.306.KP													
EXG.0BC.307.KP													
EXG.1BC.302.KP													
EXG.1BC.303.KP													
EXG.1BC.304.KP													
EXG.1BC.305.KP													
EXG.1BC.306.KP													
EXG.1BC.307.KP													
EXG.1BC.308.KP													



RM-EPG Elbow (90°) Receptacle for printed circuit, (solder or screw fixing)back panel mounting




Model	Dimensions(mm)						
	A	D	H	I	K	L	N
EPG.1BC.314.KP	11	21	7.7	14.3	19	36	15.4


RM-B





RM-EFG Fixed socket, fixed with nut, positioning slightly (G) or positioning slightly (A · · · M). There are two flat surfaces and an O-ring on the outer shell (rear panel installation)




Reference		Dimensions(mm)									
Model	Series	A	B	e	E	L	M	N	P	S2	
RM-EFG	0B	12	12.5	M9*0.6	5.5	20.7	2.5	19.1	9	8	



RM-RGG Fixed two-way, fixed with nuts, flange end with locating pin (G) or locating pin (A... G), and the other end with locating pin (J, K, and M)




Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	S1	S3	
RM-RGG	0B	12	13.8	M10*0.75	8.0	34	2.0	9.0	12	
RM-RGG	0B	12	13.8	M10*0.75	8.0	43	2.0	9.0	12	
RM-RJG	0B	12	13.8	M10*0.75	8.0	34	2.0	9.0	12	
RM-RGJ	0B	12	13.8	M10*0.75	8.0	34	2.0	9.0	12	
RM-RAK	0B	12	13.8	M10*0.75	8.0	34	2.0	9.0	12	
RM-RGM	0B	12	13.8	M10*0.75	8.0	34	2.0	9.0	12	
RM-RGG	1B	16	19.2	M14*1.00	8.5	47	2.5	12.5	17	
RM-RJG	1B	16	19.2	M14*1.00	8.5	39	2.5	12.5	17	
RM-RGJ	1B	16	19.2	M14*1.00	8.5	39	2.5	12.5	17	
RM-RJG	2B	20	21.5	M16*1.00	12.0	44	4.0	15.0	19	
RM-RGJ	2B	20	21.5	M16*1.00	12.0	44	4.0	15.0	19	
RM-RGJ	3B	25	27.0	M20*1.00	32.0	53	4.0	18.5	24	
RM-RGJ	4B	34	34.0	M25*1.00	50.0	65	4.0	23.5	30	

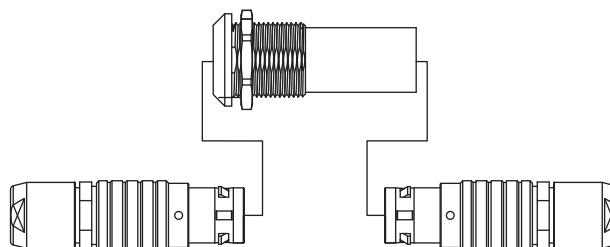

RM-B

RM-B series Cable collet



00B

Cable Clamp Set	Cable collet (mm)	Cable dia Range	
code	ΦA	Max	Min
22	2.2	2.2	1.4
27	2.7	2.7	>2.2
35	3.5	3.5	>2.7

0B

Cable Clamp Set	Cable collet (mm)	Cable dia Range	
code	ΦA	Max	Min
21	2.1	2.2	1.4
32	3.2	3.2	>2.2
42	4.2	4.2	>3.2
52	5.2	5.2	>4.2
56	5.6	5.6	>5.2 ^①

1B

Cable Clamp Set	Cable collet (mm)	Cable dia Range	
code	ΦA	Max	Min
32	3.2	3.2	2.5
42	4.2	4.2	3.2
52	5.2	5.2	>4.2
62	6.2	6.2	>5.2
72	7.2	7.2	>6.2
76	7.6	7.5	7.1 ^①

2B

Cable Clamp Set	Cable collet (mm)	Cable dia Range	
code	ΦA	Max	Min
42	4.2	4.2	>3.2
52	5.2	5.2	>4.2
62	6.2	6.2	>5.2
72	7.2	7.2	>6.2
82	8.2	8.2	>7.2
92	9.2	9.2	>8.2
99	9.9	9.7	9.1 ^①

3B

Cable Clamp Set	Cable collet (mm)	Cable dia Range	
code	ΦA	Max	Min
62	6.2	6.2	4.9
72	7.2	7.7	>6.2
82	8.2	8.0	7.1
92	9.2	9.2	>7.7
10	10.2	10.2	>9.2
11	11.2	11.0	10.2
12	11.9	11.7	11.1 ^①

① This cable collet is only for crimping type cable collet, not fit for cable nut with bend relief type.


RM-B

Alignment key and Polarized Keys(RM-B series)

RM-B series connector model type are composed of five letters.

The last letter indicates the key position and the contact type (male or female).

Front view of receptacle



Code	Keys No.	Angles	Series			Code	Keys No.	Angles	Series		Contact Type		
			00	0B	1B				2B	3B	Plug	Receptacle	
G	1		0°	0°	0°	G	1		0°	0°	Male	Female	
A	2	α	30°	30°	30°	A	2	α	30°	30°	Male	Female	
B	2		60°	60°	60°	B	2		45°	60°	Male	Female	
C	2		-	90°	90°	C	2		60°	90°	Male	Female	
D	2	β	-	135°	135°	D	2	γ	95°	135°	Male	Female	
E	2		-	145°	145°	E	2		β	120°	145°	Male	Female
F	2		-	155°	155°	F	2			145°	155°	Male	Female
J	2	γ	45°	45°	45°	J	2	α	37.5°	45°	Female	Male	
K	2		-	70°	70°	K	2		52.5°	70°	Female	Male	
L	2		-	80°	80°	L	2		γ	70°	80°	Female	Male
M	2	δ	-	110°	-	M	2	δ	-	110°	Female	Male	

RM-K Series

Metal Waterproof Push Pull Self-locking Connector

K series has same insulator and contact configuration as B series:

- Secure high performance push pull self-locking system
- High pin density contributing to equipment miniaturization
- Alignment key and polarized keying system to avoid cross-interface
- Sealed up to IP68
- 360° EMC shielded
- Robust and shock resistant designs
- Functional in a wide temperature range from -50°C to +250°C
- Available solder, PCB and right angle PCB contact



RM-K Series


Plugs



FGG



FGG



FPG



FAG

Receptacles



EGG




EEG




EEG



HGG



PHG




PHG



PEG

Part Numbering System

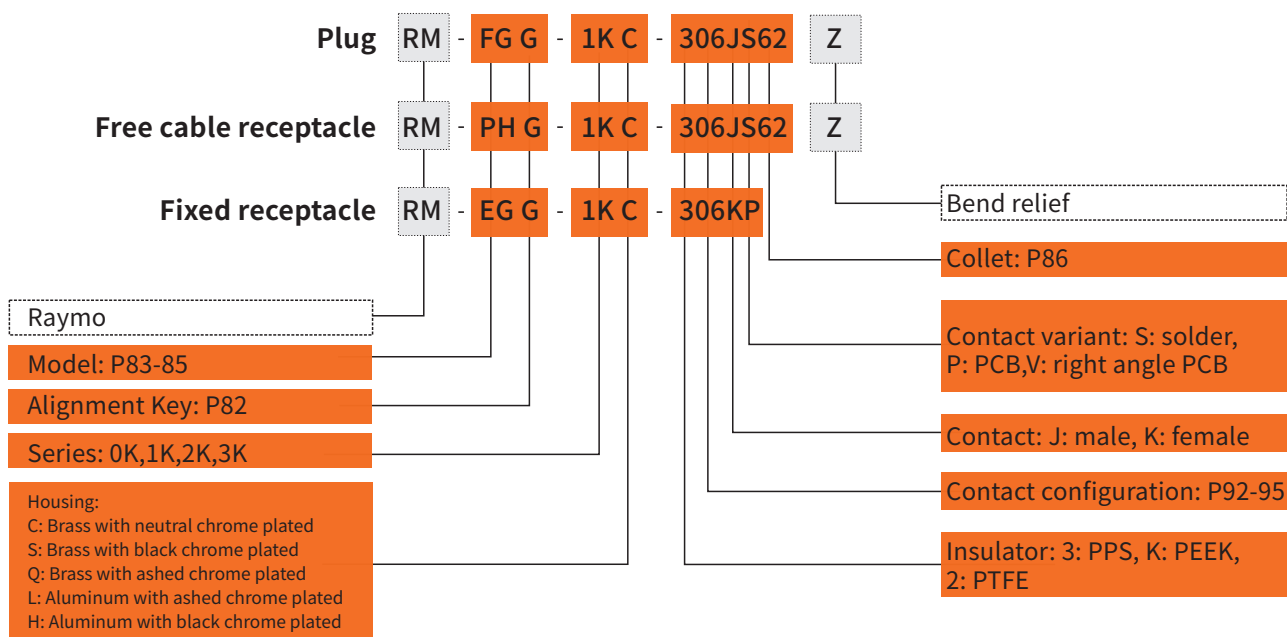

Part No.Example

Straight plug with cable collet

RM-FGG-1KC-303JS62Z= straight plug with key (G) and cable collet, 1K series, multipole 3 contacts, outer shell in natural chrome-plated brass, PPS insulator, male solder contacts, collet for 5.2-6.2 mm diameter cable, with a black colour bend relief.

Free cable receptacle

RM-PHG-1KC-303KS62Z= free cable receptacle (G) and cable collet, 1K series, multipole 3 contacts, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, collet for 5.2-6.2 mm diameter cable, with a black colour bend relief.

Fixed receptacle


RM-EGG-1KC-303KP= fixed receptacle, nut fixing, with key(G), 1K series, multipole 3 contacts, outer shell in natural chrome plated brass, PPS insulator, female pcb contacts.

RM-K

Part Section Showing Internal Components


Cable Mount Plug

- ① Outer shell
- ② Male contact
- ③ Latch sleeve
- ④ Insulator
- ⑤ Inner shell
- ⑥ Split insert carrier A/B
- ⑦ Retaining ring
- ⑧ Earthing cone
- ⑨ O-ring
- ⑩ Washer
- ⑪ Cable collet
- ⑫ Collet nut

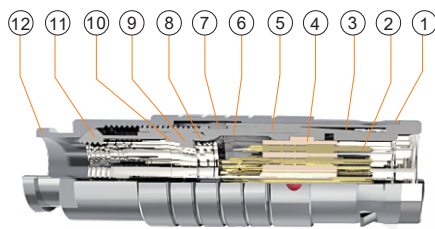

Fixed Receptacle

- ① Outer shell
- ② Hexagonal nut
- ③ Outer o-ring
- ④ Inner o-ring
- ⑤ Retaining ring
- ⑥ Earthing crown
- ⑦ Insulator
- ⑧ Female contact



Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibration	10-2000Hz, 15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96h	IEC 60512-6 test 11f
Protection index (mated)	IP68	IEC 60529
Climatical category	55/175/21	IEC 60068-1

Electrical

Characteristics		Value	Standard
Shielding efficiency	at 10 MHz	>95 dB	IEC 60619-1-3
	at 1 GHz	>80 dB	IEC 60619-1-3


RM-K

Alignment key and Polarized keys(RM-K series)


RM-K series connector model type are composed of five letters.

The LASTLETTER indicates the key position and the contact type (male or female).

Front view of receptacle




Code	Keys No.	Angles	Series				Contact Type	
			0K	1K	2K	3K	Plug	Receptacle
G	1		0°	0°	0°	0°	Male	Female
A	2	α	30°	30°	30°	30°	Male	Female
B	2		45°	45°	45°	45°	Male	Female
C	2		60°	60°	60°	60°	Male	Female
D	2	γ	95°	95°	95°	95°	Male	Female
E	2	β	120°	120°	120°	120°	Male	Female
F	2		145°	145°	145°	145°	Male	Female
L	2	γ	75°	75°	75°	75°	Female	Male



RM-FGG Cable Mount Straight Plug,
nut for fitting a bend relief



Reference		Dimensions(mm)			
Model	Series	A	L	M	S2
RM-FGG	0K	11.0	34.0	23.0	7.0
RM-FGG	1K	13.0	42.0	28.0	9.0
RM-FGG	2K	16.0	52.0	36.0	12.0
RM-FGG	3K	19.0	60.0	40.0	15.0



RM-FGG Cable Mount Straight Plug



Reference		Dimensions(mm)			
Model	Series	A	L	M	S2
RM-FGG	0K	11.0	34.0	23.0	7.0
RM-FGG	1K	13.0	42.0	28.0	9.0
RM-FGG	2K	16.0	52.0	36.0	12.0
RM-FGG	3K	19.0	60.0	40.0	15.0

RM-K




RM-FPG Cable Mount Straight Plug

Reference		Dimensions(mm)							
Model	Series	A	D	H	L	M	S1	S2	S3
RM-FPG	0K	11.0	7.3	25.0	36.0	25.0	9.0	8.0	8.0
RM-FPG	1K	13.0	8.7	33.0	42.0	28.0	11.0	9.0	10.0
RM-FPG	2K	16.0	10.2	40.0	51.0	35.0	14.0	12.0	13.0




RM-FAG Fixed plug

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	N	S1	S3
RM-FAG	1K	20	21.5	M16*1.0	2.3	25.3	16.0	22.5	14.5	19
RM-FAG	2K	25	27.0	M20*1.0	4.5	31.2	18.0	28.3	18.5	24
RM-FAG	3K	30	34.0	M24*1.0	4.0	36.3	22.5	33.8	22.5	30



RM-EGG Panel Mount Fixed Receptacle



Reference		Dimensions(mm)									
Model	Series	A	B	e	E	L	M	N	S1	S3	
RM-EGG	0K	18.0	19.2	M14*1.0	6	21.7	4.0	20.0	12.5	17	
RM-EGG	1K	20.0	21.5	M16*1.0	9	27.0	4.5	25.1	14.5	19	
RM-EGG	2K	25.0	27.0	M20*1.0	9	30.7	5.0	28.6	18.5	24	
RM-EGG	3K	31.0	34.0	M24*1.0	11	36.2	6.0	33.6	22.5	30	



RM-EEG Panel Mount Fixed Receptacle, back panel mounting



Reference		Dimensions(mm)								
Model	Series	A	B	e	E	M	N	P	S1	
RM-EEG	0K	18.0	18.0	M14*1.0	3.4	3.5	20.1	7.0	12.5	
RM-EEG	1K	20.0	20.0	M16*1.0	6.2	3.5	25.1	10.0	14.5	
RM-EEG	2K	25.0	25.0	M20*1.0	5.0	5.0	28.6	10.0	18.5	
RM-EEG	3K	30.0	31.0	M24*1.0	7.5	4.5	33.6	12.0	22.5	

RM-K





RM-EEG Panel Mount Fixed Receptacle elbow 90° contact for printed circuit (back panel mounting)

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	M	N	P	S1	
RM-EEG	0K	18.0	18.0	M14*1.0	3.4	3.5	20.1	7.0	12.5	
RM-EEG	1K	20.0	20.0	M16*1.0	6.2	3.5	25.1	10.0	14.5	
RM-EEG	2K	25.0	25.0	M20*1.0	5.0	5.0	28.6	10.0	18.5	
RM-EEG	3K	30.0	31.0	M24*1.0	7.5	4.5	33.6	12.0	22.5	





RM-HEG Panel Mount Fixed Receptacle

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	P	S1	
RM-HEG	0K	18.0	18.0	M14*1.0	2.4	21.7	3.5	7.0	12.5	
RM-HEG	1K	20.0	20.0	M16*1.0	6.2	30.0	5.0	10.0	14.5	
RM-HEG	2K	25.0	25.0	M20*1.0	5.0	33.7	3.5	10.0	18.5	



RM-HGG Panel Mount Fixed Receptacle,
Watertight or vacuumtight



Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	S1	S3	
RM-HGG	0K	18.0	19.2	M14*1.0	5.5	21.7	4.0	12.5	17.0	
RM-HGG	1K	20.0	21.5	M16*1.0	9.0	27.0	4.5	14.5	19.0	
RM-HGG	2K	25.0	27.0	M20*1.0	13.0	30.7	5.0	18.5	24.0	
RM-HGG	3K	31.0	34.0	M24*1.0	16.0	36.2	6.0	22.5	30.0	



RM-PHG Cable Mounted Receptacles, nut
for fitting a bend relief


Reference		Dimensions(mm)		
Model	Series	A	L	S2
RM-PHG	0K	13.0	34.0	8.0
RM-PHG	1K	15.0	45.0	9.0
RM-PHG	2K	19.0	54.0	12.0
RM-PHG	3K	23.0	65.0	15.0

RM-K

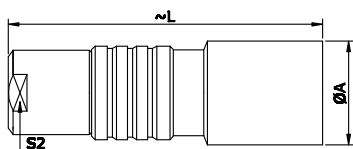

RM-PHG Cable Mounted Receptacles


Reference		Dimensions(mm)		
Model	Series	A	L	S2
RM-PHG	0K	13.0	34.0	8.0
RM-PHG	1K	15.0	45.0	9.0
RM-PHG	2K	19.0	54.0	12.0
RM-PHG	3K	23.0	65.0	15.0

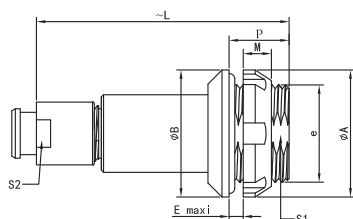

RM-PEG Back panel fixed receptacle, nut fixing, key(G) or
key(A...F, L and R)

Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	M	P	S1	S2
RM-PEG	0K	18.0	18	M14*1.0	5.0	34	3.5	8.5	12.5	8
RM-PEG	1K	20.0	20	M16*1.0	6.5	45	3.5	10.0	14.5	9
RM-PEG	2K	25.0	25	M20*1.0	4.0	54	3.5	7.5	18.5	12
RM-PEG	3K	30.0	31	M24*1.0	7.5	65	4.5	12.0	22.5	15

RM-K series Cable collet



0K

Cable Clamp Set code	Cable collet (mm)		Cable dia Range	
	ΦA	ΦB	Max	Min
42	4.2	-	4.2	2.5
52	5.2	-	5.2	>4.2
62	6.2	-	6.2	>5.2
72	7.2	6.7	7.2	>6.2
76	7.6	6.7	7.5	7.1 ^①

1K

Cable Clamp Set code	Cable collet (mm)		Cable dia Range	
	ΦA	ΦB	Max	Min
42	4.2	-	4.2	>3.2
52	5.2	-	5.2	>4.2
62	6.2	-	6.2	>5.2
72	7.2	-	7.2	>6.2
82	8.2	-	8.2	>7.2
92	9.2	8.6	9.2	>8.2
99	9.9	8.6	9.7	9.1 ^①

2K

Cable Clamp Set code	Cable collet (mm)		Cable dia Range	
	ΦA	ΦB	Max	Min
62	6.2	-	6.2	4.9
72	7.2	-	7.7	>6.2
82	8.2	-	8.0	7.1
92	9.2	-	9.2	>7.7
10	10.2	-	10.2	>9.2
11	11.2	10.2	11.0	10.2
12	11.9	10.2	11.7	11.1 ^①

① This cable collet is only for crimping type cable collet, not fit for cable nut with bend relief type.

RM-W Series

Deepsea Screw Locking Metal Connector

W series has same insulator and contact configuration as B series:

- Secure high performance screw locking system
- Ideal for using underwater 300m
- High pin density contributing to equipment miniaturization
- Alignment Key and Polarized Keying System to avoid cross-interface
- Sealed up to IP68 and hermetic
- 360° EMC shielded
- Robust and shock resistant designs
- Functional in a wide temperature range from -50°C to +250°C
- Available solder, PCB and right angle PCB contact




RM-W Series

Plugs




FVG

Receptacles



EVG

Part Numbering System

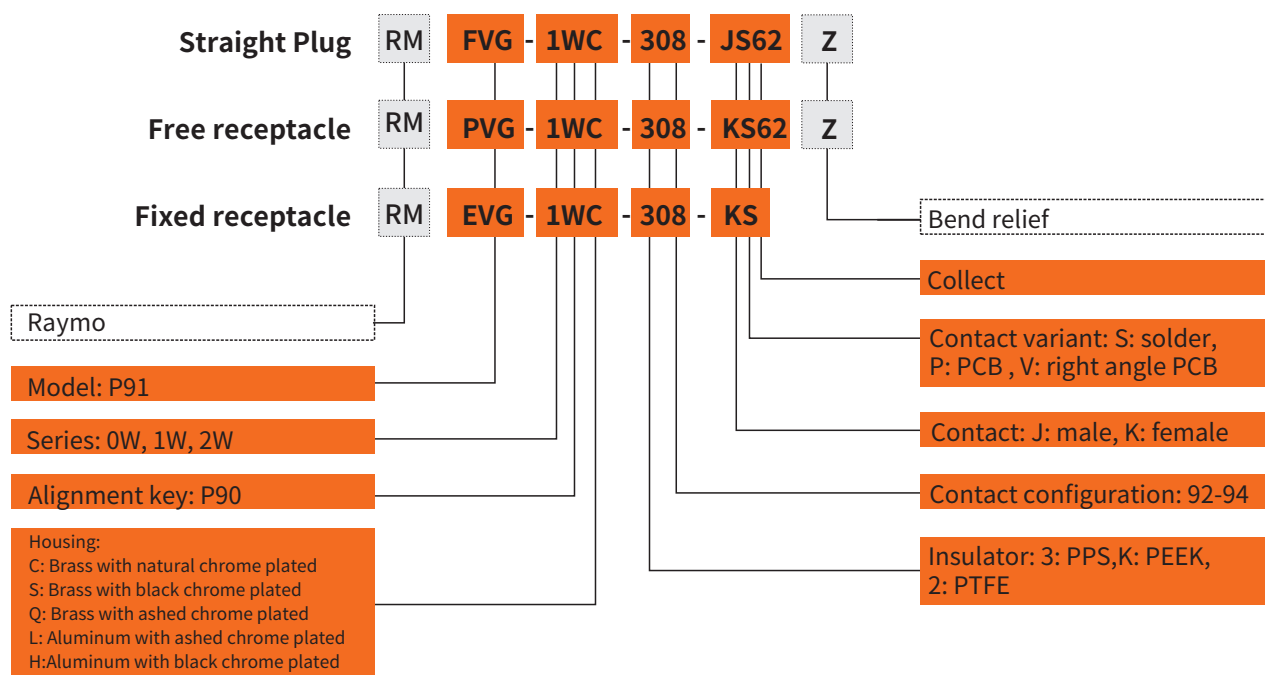

Part No. Example

Straight plug with cable collet

RM-FVG-1WC-308-JS62Z= straight plug, 1W series, multipole 8 contacts, outer shell in natural chrome-plated brass, PPS insulator, male solder contacts, collet for 6.0 mm diameter cable, with a black bend relief IP68

Fixed receptacle

RM-EVG-1WC-308-KS= fixed receptacle, 1W series, multipole 8pin, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, IP68

RM-W


Free receptacle

RM-PVG-1WC-308-KS62Z= free receptacle, 1W series, multipole 8pin, outer shell in natural chrome-plated brass, PPS insulator, female solder contacts, collet for 6.0 mm diameter cable, with a black bend relief IP68

Part Section Showing Internal Components


Cable Mount Plug

- ① Inner shell
- ② Male contact
- ③ O-ring 1
- ④ O-ring 2
- ⑤ Insulator
- ⑥ Plug screw
- ⑦ Snap Spring
- ⑧ Earthing tag
- ⑨ Conical gasket
- ⑩ Inner washer
- ⑪ Cable collet
- ⑫ Collet nut

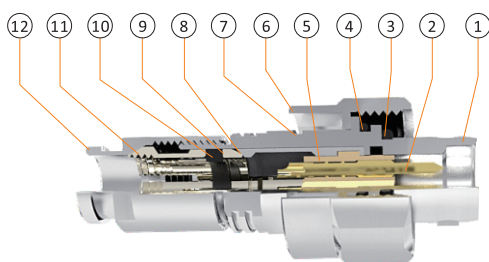

Fixed Receptacle

- ① Outer shell
- ② Insulator
- ③ Washer
- ④ Female contact
- ⑤ Hexagonal nut
- ⑥ Retaining ring



Technical Characteristics

Mechanical and Climatrical

Characteristics	Value	Standard
Endurance	>1000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-20°C, +200°C	
Resistance to vibration	10-2000Hz, 15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>144hrs	IEC 60512-6 test 11f
Protection index (mated)	IP68	IEC 60529
Climatrical category	20/200/21	IEC 60068-1


Electrical

Characteristics	Value	Standard	
Shielding efficiency	at 10 MHz at 1 GHz	>95 dB >80 dB	IEC 60619-1-3 IEC 60619-1-3

Alignment key and Polarized Keys(RM-W series)



RM-W series connector model type are composed of five letters. The LASTLETTER indicates the key position and the contact type(male or female)

Front view of receptacle




Code	Keys No.	Angles	Series				Contact Type		Remark
			0W	1W	2W	3W	Plug	Receptacle	
G	1		0°	0°	0°	0°	Male	Female	●
A	2	α	30°	30°	30°	30°	Male	Female	●
B	2		45°	45°	45°	45°	Male	Female	●
C	2	γ	60°	60°	60°	60°	Male	Female	○

● Available
○ Optional



RM-FVG Cable Mount Straight plug, nut for fitting a bend relief

Reference		Dimensions(mm)						
Model	Series	A	B	L	M	N	S3	S3
RM-FVG	0W	17.2	8.9	35.5	30.8	13.5	16	8
RM-FVG	1W	19.3	11.0	43.7	35.5	14.0	18	9
RM-FVG	2W	23.5	14.0	52.5	43.0	15.5	22	12

































RM-EVG Fixed socket

Reference		Dimensions(mm)									
Model	Series	A	B	e	e1	E	L	N	S1	S2	S3
RM-EVG	0W	16.2	16.0	M12*1.0	M14*1.0	4.0	21.7	8	10.5	12.5	14
RM-EVG	1W	18.3	19.5	M14*1.0	M16*1.0	8.0	27.0	9	12.5	14.5	17
RM-EVG	2W	22.5	21.8	M16*1.0	M20*1.0	9.0	30.7	12	14.5	18.5	19





















RM-W

Insulator Configuration

	solder male contact 	solder female contact 	Insulator	Contact No.	ØA(MM)	Contact type			Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
00			302	2	0.5	●	●	●	1.00	0.95	5.0
			303	3	0.5	●	●	●	0.80	0.95	3.0
			304	4	0.5	●	●	●	0.80	0.65	2.0
			305	5	0.35	●	●	●	0.7	0.6	1.5
			307	7	0.3	●	●	●	0.50	0.6	1.0
0B 0K 0W			302	2	0.9	●	●	●	1.30	1.05	10.0
			303	3	0.9	●	●	●	1.20	0.90	8.0
			304	4	0.7	●	●	●	0.85	0.70	7.0
			305	5	0.7	●	●	●	1.00	0.70	6.5
			306	6	0.5	●	●	●	0.85	0.65	2.5
			307	7	0.5	●	●	●	0.80	0.70	2.5
			309	9	0.5	●	●	●	0.60	0.50	2.0
			302	2	1.3	●	●	●	1.50	1.35	15.0
1B 1K 1W			303	3	1.3	●	●	●	1.30	1.55	12.0

- First choice alternative
- Special order alternative
























Insulator Configuration

	solder male contact 	solder female contact 	Insulator	Contact No.	ØA(MM)	Contact type			Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
1B 1K 1W			304	4	0.9	●	●	●	1.35	1.45	10.0
			305	5	0.9	●	●	●	1.25	1.15	9.0
			306	6	0.7	●	●	●	1.05	1.20	7.0
			307	7	0.7	●	●	●	0.95	1.05	7.0
			308	8	0.7	●	●	●	0.95	1.15	5.0
			310	10	0.5	●	●	●	0.90	1.50	2.5
			314	14	0.5	●	●	●	0.80	1.20	2.0
			316	16	0.5	●	●	●	0.80	1.25	1.5
2B 2K 2W			302	2	2.0	●	●	●	2.10	1.75	25.0
			303	3	1.6	●	●	●	2.40	1.85	17.0
			304	4	1.3	●	●	●	1.85	1.85	15.0
			305	5	1.3	●	●	●	1.75	1.60	14.0

- First choice alternative
- Special order alternative

RM-W

Insulator Configuration

	solder male contact 	solder female contact 	Insulator	Contact No.	ØA(MM)	Contact type			Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
2B 2K 2W			306	4	1.3	●	●	●	1.35	1.45	12.0
			307	7	1.3	●	●	●	1.75	1.60	11.0
			308	8	0.9	●	●	●	1.50	1.25	10.0
			310	10	0.9	●	●	●	1.45	1.30	8.0
			312	12	0.7	●	●	●	1.25	1.35	7.0
			314	14	0.7	●	●	●	1.15	1.35	6.5
			316	16	0.7	●	●	●	0.95	1.25	6.0
			318	18	0.7	●	●	●	0.85	1.20	5.5
			319	19	0.7	●	●	●	0.95	1.25	5.0
			326	26	0.5	●	●	○	0.95	1.30	2.0
3B 3K			302	2	3.0	●	●	-	2.10	1.55	35.0
			303	3	2.0	●	●	●	1.90	1.50	25.0

- First choice alternative
- Special order alternative

Insulator Configuration

	solder male contact 	solder female contact 	Insulator	Contact No.	ØA(MM)	Contact type			Test voltage(contact -shell)k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
3B 3K			304	4	2.0	●	●	●	1.45	1.25	19.0
			305	5	1.6	●	●	●	1.90	1.25	19.0
			306	6	1.6	●	●	●	1.60	1.15	17.0
			307	7	1.6	●	●	●	1.70	1.25	15.0
			308	8	1.3	●	●	●	1.65	1.15	13.0
			309	8 1	1.3 2.0	●	●	-	1.35 1.35	1.05 1.05	6.0 15.0
			310	10	1.3	●	●	●	1.25	0.90	12.0
			312	12	0.9	●	●	●	1.45	1.00	9.0
			314	14	0.9	●	●	●	1.20	1.20	9.0
			316	16	0.9	●	●	●	1.20	0.85	8.0
			330	30	0.7	●	●	●	0.80	0.70	3.5
			332	32	0.7	●	●	●	0.75	0.70	3.0

- First choice alternative
- Special order alternative

RM-W



RM-M series


Ratchet-coupling mechanism

- Quick mating: less than 3/4 turn to seat
- Compact design for space savings, Lightweight
- Available solder, PCB and right angle PCB contact
- 360° screening for full EMC shielding
- Oil and fuel resistant and high vibration and shock resistance
- Sealed to IP68 when mated
- Colour coding / keying – Reverse gender configuration




RM-M Series

Plugs




FMN




FXN


Receptacles




EDN



PFN




PBN




HEN



ECN




EGN



PMN

Part Numbering System

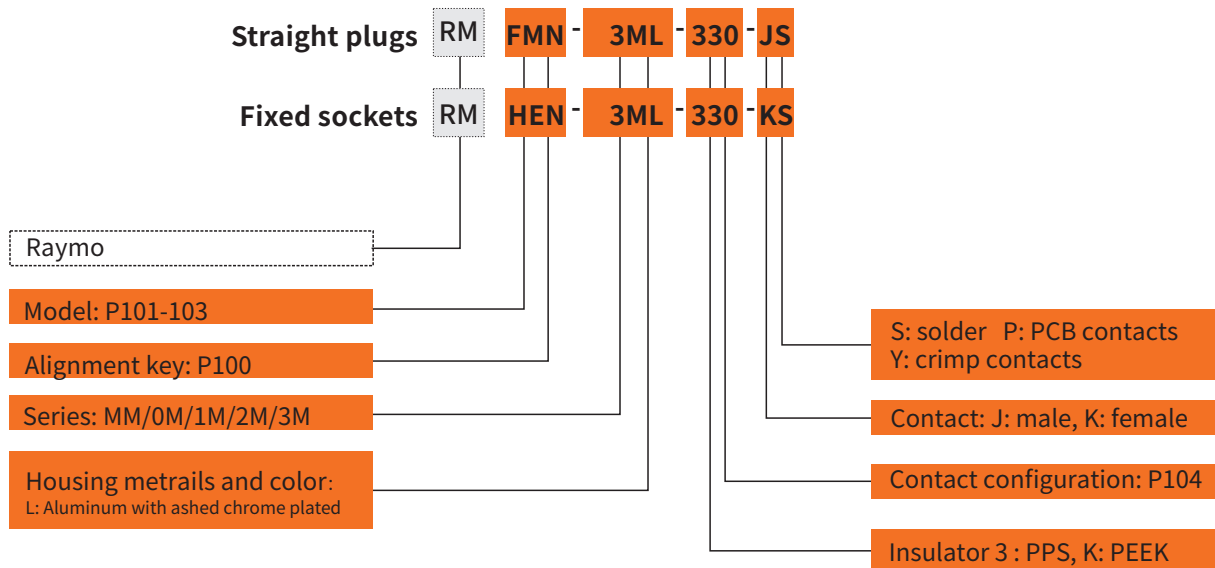

Part No. Example

Straight plug

RM-FMN-3ML-330JS= straight plug with key (N), 3M series, multipole type with 30 contacts, outer shell in ashed nickel-plated aluminium alloy, PPS insulator, male solder contacts.


Fixed sockets

RM-HEN-3ML-330-KS= fixed socket, nut fixing, with key (N), 3M series, multipole type with 30 contacts, outer shell in ashed nickel-plated aluminium alloy, PPS, female solder contacts, watertight.

Part Section Showing Internal Components


straight plug

- ① Plug sleeve
- ② Outer shell
- ③ Inner sleeve
- ④ Male contacts
- ⑤ Wave gasket
- ⑥ Ratchet mechanism
- ⑦ Insulator
- ⑧ Ground pin
- ⑨ Back nut

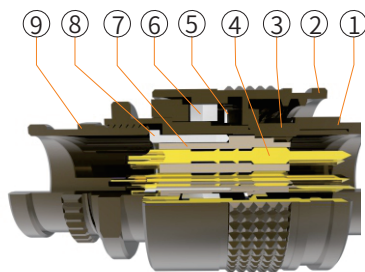

Fixed socket

- ① Outer shell
- ② Insulator
- ③ Retaining ring
- ④ Inner
- ⑤ O ring
- ⑥ Hexagonal nut
- ⑦ Outer O ring
- ⑧ Earthing crown



RM-M

Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard
Endurance	3000 cycle	IEC60512-5test9a
Humidity	95% 21 days	IEC 60068-2
Temperature range	-55C° ~ 200C° 30min, 10 cycles	GJB1217A
Resistance to vibration	50-2000 Hz, 37.8 g rms-3 axes; 4h amb	IEC 60512-4 test 6d
Shock resistance	300 g - 3 msec	IEC 60512-4 test 6c
Salt spray corrosion test	96H	IEC 60512-6 test 11f
Protection index (mated)	IP68	IEC 60529
Climatical category	> 10 ¹² Ω, > 10 ¹⁰ Ω	IEC 60512-2

Electrical


Characteristics	Value	Standard	
Shielding efficiency	at 10 MHz	>75 dB	IEC 60619-1-3
	at 1 GHz	>40 dB	IEC 60619-1-3

Alignment Key and Polarized Keying System


Mseries connector model part numbers are composed of three letters. The LAST LETTER indicates the keys corresponding to a particular contact type. For example, straight plugs with N, P, R, U or W keys, are fitted with male contacts; whereas with S, T, V or X keys, plugs are fitted with female contacts. Sockets with N, P, R, U or W keys, are fitted with female contacts; whereas with S, T, V or X keys, sockets are fitted with male contacts.

RM-M


Front view of a socket	Model	Nb of keys	Angles		Colour code	Contact type	
			β	γ			
	**N	3	165°	30°	blue	male	female
	**P		150°	60°	yellow		
	**U		130°	100°	green		
	**S		155°	50°	red	female	male
	**T		135°	90°	orange		




RM-FMN Straight plug, key (N) or keys (P, R, S, T, U, V, W and X)




Reference		Dimensions(mm)				
Model	Series	A	B	C	P	L
RM-FMN	MM	11.1	13.4	10.7	5.5	21.3
RM-FMN	0M	13.1	13.4	12.7	3.9	24.1
RM-FMN	1M	14.6	13.4	14.2	3.9	24.1
RM-FMN	2M	17.6	13.4	17.2	3.9	24.5
RM-FMN	3M	19.6	13.4	19.2	3.9	24.5




RM-HEN Fixed socket, nut fixing, key (N) or keys (P, R, S, T, U, V, W and X) , print circuit, watertight(back panel mount).



Reference		Dimensions(mm)										
Model	Series	A	B	e	E	H	L	N	P	R	S1	S2
RM-HEN	MM	14	13.8	M10*0.50	4.0	5.08	20.4	15.3	3.7	10.5	9.0	11
RM-HEN	0M	17	16.8	M13*0.75	5.0	5.08	20.8	16.8	5.3	13.8	11.5	14
RM-HEN	1M	18	17.8	M14*1.00	5.0	7.62	20.8	16.8	5.3	13.8	12.5	16
RM-HEN	2M	21	20.8	M17*1.00	5.0	8.89	20.8	16.8	5.3	13.8	15.5	18
RM-HEN	3M	23	22.8	M19*1.00	5.0	10.16	20.8	16.8	5.3	13.8	17.5	20




RM-PMN Free socket, key (N) or keys (P, R, S, T, U, V, W and X), with knurled grip.




Reference		Dimensions(mm)						
Model	Series	A	B	C	D	L	P	X
RM-PMN	MM	11.1	6.4	10.7	5.6	21.4	3.7	5.8
RM-PMN	0M	13.1	8.8	12.7	8.0	25.6	5.3	6.7
RM-PMN	1M	14.6	10.5	14.2	9.7	25.6	5.3	6.7
RM-PMN	2M	17.6	14.0	17.2	13.0	26.0	5.3	7.1
RM-PMN	3M	19.6	16.0	19.2	15.0	26.0	5.3	7.1

RM-M




RM-FXN Straight plug with square flange, key (N) or keys (P, R, S, T, U, V, W and X) , with knurled grip and MIL-DTL-38999L shell thread.




Reference		Dimensions(mm)												
Model	Series	A	A1	B	C	D	E	G	H	K	L	N	V	
RM-FXN	MM	21.5	11.1	6.4	10.7	5.6	9.5	17.0	12.0	1.5	26.1	17.0	2.7	
RM-FXN	0M	26.9	13.1	8.8	12.7	8.0	12.2	18.9	15.1	1.5	29.1	20.6	2.7	
RM-FXN	1M	31.4	14.6	10.5	14.2	9.7	13.7	18.9	18.3	1.5	29.1	23.8	3.3	
RM-FXN	2M	34.6	17.6	14.0	17.2	13.0	16.7	18.9	20.6	1.5	29.5	26.1	3.3	
RM-FXN	3M	34.6	19.6	16.0	19.2	15.0	18.7	18.9	20.6	1.5	29.5	26.1	3.3	




RM-ECN Fixed socket with two nuts, key (N) or keys (P, R, S, T, U, V, W and X)




Reference		Dimensions(mm)										
Model	Series	A	B	C	E	e	G	L	P	S1	S2	S3
RM-ECN	MM	14	2.85	13.5	5.0	M10*0.50	13.8	15.0	3.7	9.0	11.0	12.0
RM-ECN	0M	17	4.72	18.2	5.0	M13*0.75	16.8	18.3	5.3	11.5	14.0	16.0
RM-ECN	1M	18	5.95	19.2	5.0	M14*1.00	16.8	18.3	5.3	12.5	16.0	17.0
RM-ECN	2M	21	8.95	21.5	4.0	M17*1.00	16.8	18.3	5.3	15.5	18.0	19.0
RM-ECN	3M	23	10.95	25.0	4.0	M19*1.00	16.8	18.3	5.3	17.5	20.0	22.0




RM-EGN Fixed socket, nut fixing, key (N) or keys (P, R, S, T, U, V, W and X)




Reference		Dimensions(mm)							
Model	Series	C	D	e	E	L	P	S1	S2
RM-EGN	0M	12.7	6.8	M9*0.6	5.0	16.8	5.3	8.2	11
RM-EGN	1M	14.2	6.8	M11*1.0	4.5	16.8	5.3	9.5	13
RM-EGN	2M	17.2	7.6	M14*1.0	4	15.6	5.3	12.5	17




RM-EDN Fixed socket with square flange, key (N) or keys (P, R, S, T, U, V, W and X)



Reference		Dimensions(mm)										
Model	Series	A	B	C	G	H	K	L	N	P	V	
RM-EDN	MM	18.6	4.7	10.7	10.7	9.5	1.5	17.0	14.5	3.7	2.7	
RM-EDN	0M	20.6	4.72	12.7	12.7	11.0	1.5	18.3	16.0	5.3	2.7	
RM-EDN	1M	23.8	5.95	14.2	14.2	12.9	1.5	18.3	18.4	5.3	3.3	
RM-EDN	2M	26.9	8.95	17.2	17.2	15.1	1.5	18.3	20.6	5.3	3.3	
RM-EDN	3M	29.0	10.95	19.2	19.2	16.6	1.5	18.3	22.1	5.3	3.3	




RM-PFN Fixed socket with antivibration flange, key (N) or keys (P, R, S, T, U, V, W and X)




Reference		Dimensions(mm)											
Model	Series	A	B	C	D	E	G	H	K	N	Ss	V	
RM-PFN	MM	18.6	6.4	10.7	5.6	7.8	12.3	9.5	1.5	14.5	10.6	2.7	
RM-PFN	0M	20.6	8.8	12.7	8.0	10.7	12.8	11.0	1.5	16.0	11.3	2.7	
RM-PFN	1M	23.8	10.5	14.2	9.7	12.4	12.8	12.9	1.5	18.4	11.3	3.3	
RM-PFN	2M	26.9	14.0	17.2	13.0	15.5	12.8	15.1	1.5	20.6	11.7	3.3	
RM-PFN	3M	29.0	16.0	19.2	15.0	17.5	12.8	16.6	1.5	22.1	11.7	3.3	

RM-M



RM-PBN Fixed socket with two nuts, key (N) or keys (P, R, S, T, U, V, W and X)



Reference		Dimensions(mm)									
Model	Series	A	B	C	D	G	H	N	P	Ss	X
RM-PBN	MM	21.0	6.4	11.3	5.6	6.7	16.2	12.5	3.7	13.2	5.8
RM-PBN	0M	27.0	8.8	14.5	8.0	8.3	21.4	16.0	5.3	15.3	6.7
RM-PBN	1M	29.0	10.5	16.5	9.7	8.3	23.4	18.0	5.3	15.3	6.7
RM-PBN	2M	32.0	14.0	19.5	13.0	8.3	26.4	21.0	5.3	15.7	7.1
RM-PBN	3M	35.0	16.0	21.5	15.0	8.3	29.0	23.0	5.3	15.7	7.1

RM-M

Technical Characteristics

		solder male contact	solder female contact	Contact type								
				Insulator	Contact No.	ØA(MM)	Solder contact	PCB straight contact	AWG (Max)	Test voltage(contact -shell)k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
MM				303	3	0.5	●	●	28	1.15	0.95	3.0
				304	4	0.5	●	●	28	0.95	0.90	2.0
OM				302	2	0.9	●	●	22	1.45	1.00	10.0
				303	3	0.9	●	●	22	1.70	1.40	8.0
				304	4	0.7	●	●	22	1.35	0.90	7.0
1M				305	5	0.7	●	●	22	1.25	1.00	6.5
				302	2	1.3	●	●	20	1.50	1.10	19.0
				303	3	1.3	●	●	20	1.05	0.95	15.5
				305	5	0.9	●	●	22	1.30	1.30	9.0
				307	7	0.7	●	●	22	1.45	1.20	7.0
				308	8	0.7	●	●	22	1.30	1.10	5.0

- First choice alternative
- Special order alternative








RM-M

Technical Characteristics

solder male contact		solder female contact		Insulator	Contact No.	ØA(MM)	Contact type			Test voltage(contact -shell)k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
							Solder contact	PCB straight contact	AWG(Max)			
2M			304	4	1.3	●	●	20	1.55	1.35	15.5	
			308	8	0.9	●	●	22	1.95	1.10	10.0	
			310	10	0.9	●	●	22	1.80	1.20	8.0	
			312	12	0.7	●	●	22	1.65	1.15	7.0	
			319	19	0.7	●	●	22	1.20	1.00	4.0	
3M			322	22	0.7	●	●	22	1.25	1.15	4.0	
			330	30	0.7	●	●	22	1.10	1.00	3.5	

- First choice alternative
- Special order alternative

RM-M

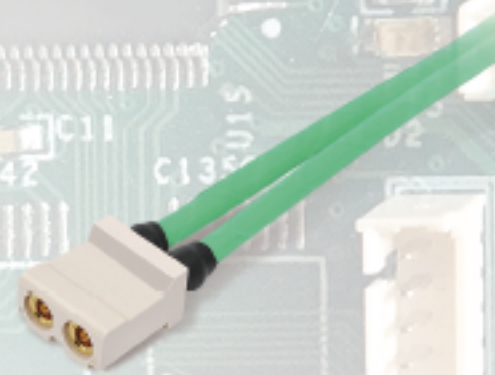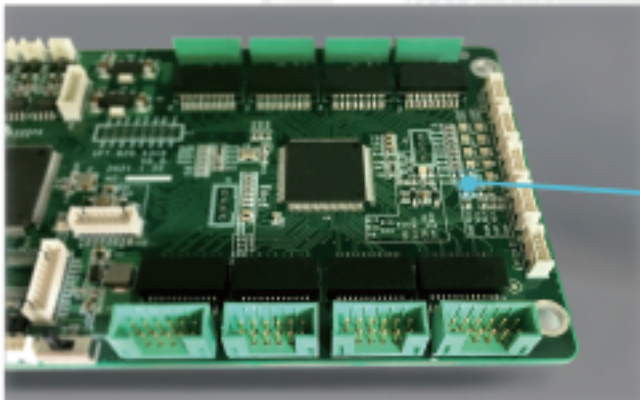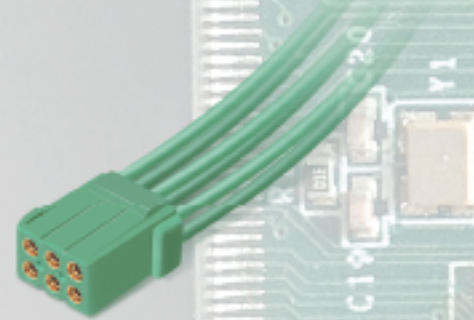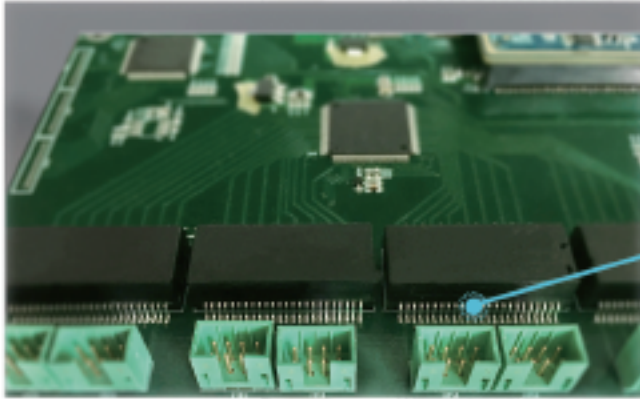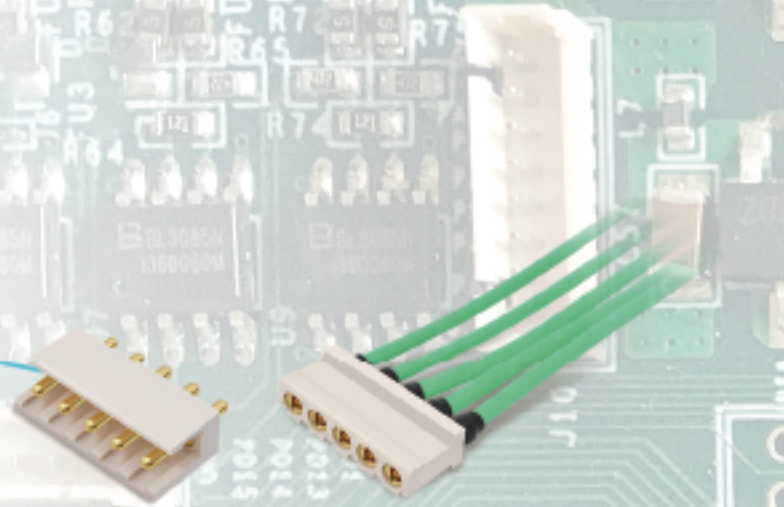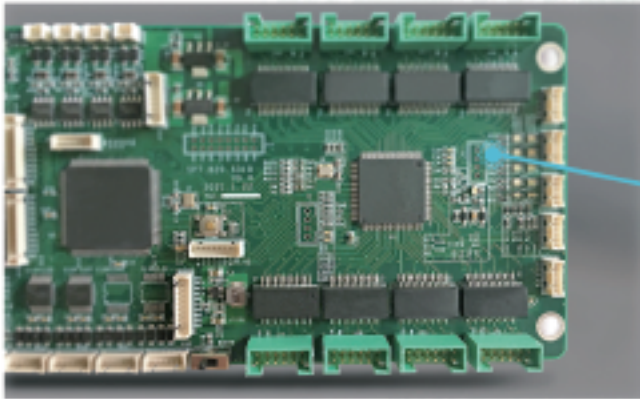

PCB Application

RM-S Series

Half-moon Push Pull Self-locking Connector

- Secure high performance push pull self-locking system
- Unique half-moon design for blind-mated
- High pin density contributing to equipment miniaturization
- 360° EMC shielded
- Robust and shock resistant designs
- Functional in a wide temperature range from -50°C to +250°C
- Available solder, PCB and right angle PCB contact




RM-S Series


Plugs




FFA



FFA



FFY



FAA


Receptacles




ERA




ERN




ERC



HGP




HEP




EWV



EPE




PCA



PCA

Part Numbering System

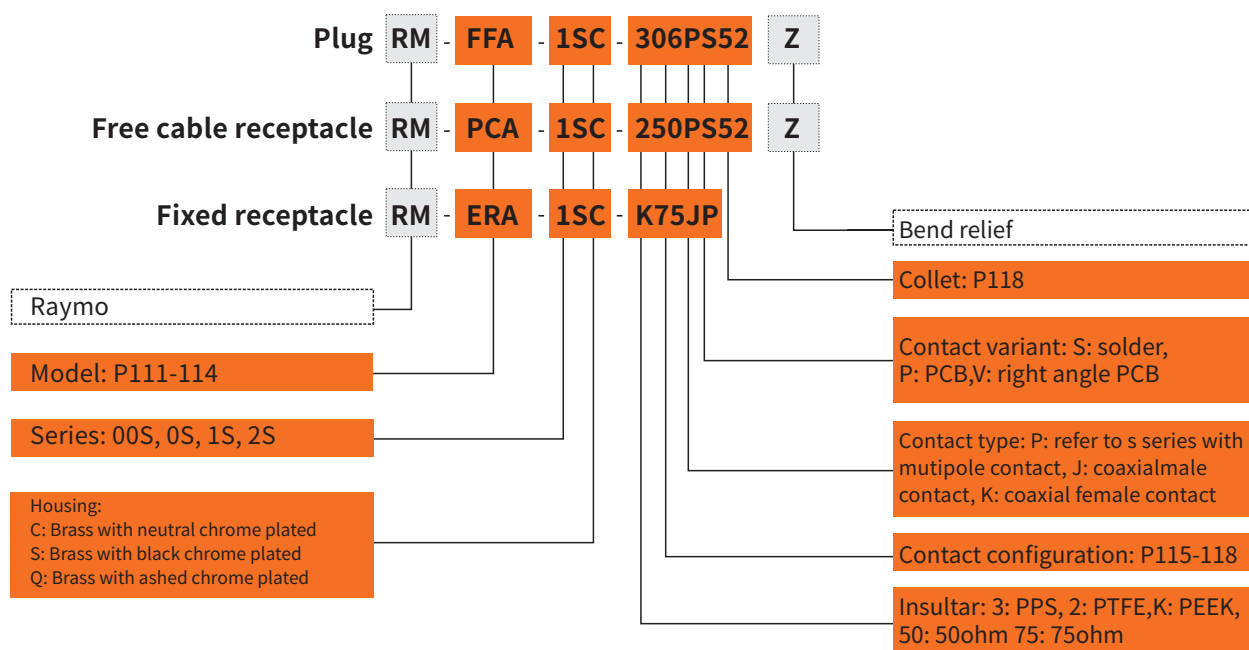

Part Number Example

Straight plug with cable collet

RM-FFA-1SC-306-JS52Z= straight plug with cable collet, 1S series, multipole 6 contacts, outer shell in natural chrome-plated brass, PPSs insulator, 3 male and 3 female solder contacts, cable collet for 4.2-5.2 mm diameter cable, with a black bend relief.

Fixed receptacle

RM-ERA-1SC-K75-KP= fixed receptacle, nut fixing, 1S series, coaxial female contact in PCB type, outshell in natural chrome-plated brass, PEEK insulator.


Free cable receptacle

RM-PCA-1SC-250-KS52Z= free cable receptacle with cable collet, 1S series, coaxial female contact, outshell in natural chrome-plated brass, PTFE insulator, collet for 4.2-5.2mm diameter cable with a black colour bend relief.

Part Section Showing Internal Components


Cable Mount Plug

- ① Outer shell
- ② Female contact
- ③ Male contact
- ④ Insulator
- ⑤ Split insert carrier A/B
- ⑥ Latch sleeve
- ⑦ Cable collet
- ⑧ Collet nut

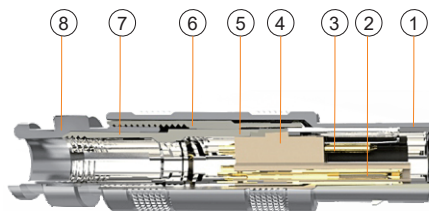

Fixed Receptacle

- ① Male contact
- ② Female contact
- ③ Locking washer
- ④ Hexagonal nut
- ⑤ Outer shell
- ⑥ Earthing crown
- ⑦ Insulator



RM-S

Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard
Endurance	>5000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-55°C, +250°C	
Resistance to vibration	10-2000Hz, 15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Salt spray corrosion test	>96h	IEC 60512-6 test 11f
Protection index (mated)	IP50	IEC 60529
Climatical category	55/175/21	IEC 60068-1


Electrical

Characteristics		Value	Standard
Shielding efficiency	at 10 MHZ	>75 dB	IEC 60619-1-3
	at 1 GHz	>40 dB	IEC 60619-1-3

RM-S




RM-FFA Cable Mount Straight Plug




Reference		Dimensions(mm)			
Model	Series	A	L	M	S2
RM-FFA	00S	6.4	26.0	18.0	4.5
RM-FFA	0S	9.0	34.5	24.5	6.5
RM-FFA	1S	12.0	42.5	31.5	8.5
RM-FFA	2S	14.8	52.0	40.0	11.0
RM-FFA	3S	17.8	61.0	46.0	14.0




RM-FFA Cable Mount Straight Plug and Nut for fitting a bend relief



Reference		Dimensions(mm)			
Model	Series	A	L	M	S2
RM-FFA	00S	6.4	26.0	18.0	4.5
RM-FFA	0S	9.0	34.5	24.5	6.5
RM-FFA	1S	12.0	42.5	31.5	8.5
RM-FFA	2S	14.8	52.0	40.0	11.0
RM-FFA	3S	17.8	61.0	46.0	14.0




RM-FFY Cable Mount Straight Plug




Reference		Dimensions(mm)				
Model	Series	A	M	L	S1	S2
RM-FFY	00S	8.9	25.0	33	8.0	8.0


RM-S




RM-FAA Cable Mount Straight Plug




Reference		Dimensions(mm)							
Model	Series	A	B	e	E	L	M	S1	S3
RM-FAA	00S	8.0	10.2	M7*0.5	2.0	15.5	9.0	6.3	9.0
RM-FAA	0S	10.0	12.4	M9*0.6	2.0	18.5	11.2	8.2	11.0
RM-FAA	1S	14.0	15.8	M12*1.0	2.5	22.5	12.5	10.5	14.0
RM-FAA	2S	18.0	19.2	M15*1.0	4.0	25.0	13.8	13.5	17.0




RM-ERN Panel Mount Fixed Receptacle, Nut fixing, with earthing tag




Reference		Dimensions(mm)								
Model	Series	A	B	e	E	L	L ¹⁾	M	S1	S3
RM-ERN	0S	10.0	12.4	M9*0.6	7.0	19.3	19.3	1.2	8.2	11.0
RM-ERN	1S	14.0	15.8	M12*1.0	7.5	22.4	22.4	1.5	10.5	14.0
RM-ERN	2S	18.0	19.2	M15*1.0	8.5	26.3	26.3	1.8	13.5	17.0
RM-ERN	3S	22.0	25.0	M18*1.0	11.5	29.8	29.8	2.0	16.5	22.0




RM-EPE Panel Mount Receptacle




Reference		Dimensions(mm)								
Model	Series	A	B	e	E	M	N	L	S1	
RM-ERE	00S	10.0	10.2	M7*0.5	4.5	2.5	14.0	3.0	9.0	




RM-PCA Cable Mount Receptacle



Reference		Dimensions(mm)		
Model	Series	A	L	S2
RM-PCA	00S	6.5	25.0	6.0
RM-PCA	0S	8.9	33.5	7.0
RM-PCA	1S	11.9	40.5	9.0
RM-PCA	2S	14.8	50.0	12.0
RM-PCA	3S	17.8	59.0	14.0




RM-PCA Cable Mount Receptacle, nut for fitting a bend relief




Reference		Dimensions(mm)		
Model	Series	A	L	S2
RM-PCA	00S	6.5	25.0	6.0
RM-PCA	0S	8.9	33.5	7.0
RM-PCA	1S	11.9	40.5	9.0
RM-PCA	2S	14.8	50.0	12.0
RM-PCA	3S	17.8	59.0	14.0


RM-S




RM-HEP Panel mount fixed receptacle

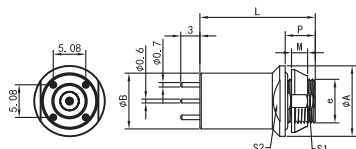

Reference		Dimensions(mm)								
Model	Series	A	B	e	P	L	M	S1	S2	
RM-HEP	00S	11.0	8.7	M7*0.5	4.7	18.0	2.5	6.3	9.0	




RM-EWV Panel mount fixed receptacle



Reference		Dimensions(mm)				
Model	Series	A	e	P	L	M
RM-EWV	00S	11.0	M7*0.5	6	15.0	2.6




RM-HGP Panel mount fixed receptacle




Reference		Dimensions(mm)						
Model	Series	A	e	P	L	M	S1	
RM-HGP	00S	11.0	M7*0.5	12.5	15.0	1.5	9.0	


RM-S




RM-ERC Panel mount fixed receptacle



Reference		Dimensions(mm)								
Model	Series	A	B	e	E	F	L	M	S1	S2
RM-ERC	00S	8.0	10.0	M7*0.5	5.5	1.6	14.5	1.0	6.3	9.0
RM-ERC	0S	10.0	12.4	M9*0.6	2.0	1.6	18.5	1.2	8.2	11.0
RM-ERC	1S	14.0	15.8	M12*0.7	2.5	1.6	20.5	1.5	10.5	14.0



RM-ERA Panel Mount Fixed Receptacle, Nut fixing



Reference		Dimensions(mm)							
Model	Series	A	B	e	E	L	M	S1	S3
RM-ERA	00S	8.0	10.2	M7*0.5	5.5	14.5	1.0	6.3	9.0
RM-ERA	0S	10.0	12.4	M9*0.6	7.0	17.5	1.2	8.2	11.0
RM-ERA	1S	14.0	15.8	M12*1.0	7.5	20.2	1.5	10.5	14.0
RM-ERA	2S	18.0	19.2	M15*1.0	8.5	24.5	1.8	13.5	17.0
RM-ERA	3S	22.0	25.0	M18*1.0	11.5	29.0	2.0	16.5	22.0

RM-S





























Insulator Configuration

		Code	Ohm(Ω)	Contact diameter	Contact No.	Contact max. diameter	Insert max. diameter	Voltage standing-wave ratio VSWR(F=GHz)	Test voltage(kv/rms)	Current rate (A)
00S		250	50	0.7	50	1.05	3.05	1.09 +0.11f	2.1	4
0S		250	50	0.9	50	0.95	2.95	1.02 +0.25f	1.0	6
1S		250	50	1.6	50	1.35	3.95	1.01 +0.23f	1.0	12
		275	75	1.3	75	1.05	3.95	1.02 +0.08f	0.8	10
2S		250	50	2.0	50	1.75	5.95	1.01 +0.95f	1.0	15
		275	75	1.6	75	1.35	5.95	1.02 +0.03f	0.5	12

- First choice alternative
- Special order alternative

RM-S



























Insulator Configuration

	solder male contact 	solder female contact 	Insulator	Contact No.	ØA(MM)	Contact type			Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
0S			302	2	0.9	●	●	●	1.50	2.10	10.0
			303	3	0.7	●	●	●	1.00	1.50	7.0
			304	4	0.7	●	●	●	1.00	1.50	7.0
1S			302	2	1.3	●	○	○	1.20	1.80	15.0
			303	3	0.9	●	●	○	1.20	1.80	10.0
			304	4	0.9	●	●	●	1.20	1.80	10.0
			305	5	0.9 0.7	●	●	●	1.50 1.50	2.10 2.10	10.0 7.0
			306	6	0.7	●	●	●	1.50	2.10	7.0
2S			302	2	1.6	●	○	○	1.70	2.40	20.0
			303	3	1.3	●	○	○	1.50	2.10	15.0
			304	4	1.3	●	○	○	1.70	2.40	15.0
			305	5	1.3	●	○	○	1.50	2.10	13.0
			306	6	1.3	●	○	○	1.50	2.10	12.0

● First choice alternative
○ Special order alternative

RM-S











Insulator Configuration

	solder male contact 	solder female contact 	Insulator	Contact No.	ØA(MMM)	Contact type			Test voltage(contact -shell)/V AC-rms	Test voltage(contact -contact)/V AC-rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
			307	3 4	1.3 0.9	●	○	○	0.80 0.80	1.20 1.20	12.0 9.0
			308	8	0.9	●	○	○	0.80	1.20	9.0
			310	10	0.9	●	○	○	0.80	1.20	7.0
3S			302	2	2.0	●	●	○	3.0	4.20	23.0
			303	3	2.0	●	○	○	1.50	2.10	20.0
			304	4	2.0	●	○	○	1.50	2.10	18.0
			305	2 3	2.0 1.3	●	○	○	1.50 1.50	1.50 1.50	18.0 14.0
			306	6	1.3	●	○	○	2.10	3.0	14.0
			307	7	1.3	●	○	○	1.0	1.50	12.0
			308	8	1.3	●	○	○	1.0	1.50	10.0
			310	10	1.3	●	○	○	1.0	1.50	9.0
			312	12	0.9	●	○	○	1.50	2.10	8.0

- First choice alternative
- Special order alternative


RM-S

Insulator Configuration

solder male contact 	solder female contact 	Insulator	Contact No.	ØA(MMM)	Contact type			Test voltage(contact -shell) k/v AC-rms	Test voltage(contact -contact)k/v AC-rms	Rated current /A
					Solder contact	PCB straight contact	PCB elbow contact			
		313	13	0.9	●	○	○	1.50	2.10	8.0
		314	14	0.9	●	○	○	1.50	2.10	7.0
		316	16	0.9	●	○	○	1.0	1.50	7.0
		318	18	0.9	●	○	○	1.0	1.50	6.0

- First choice alternative
- Special order alternative

RM-S series Cable collet



Cable Clamp Set code	Cable collet (mm)		Cable dia Range	
	ΦA	ΦB	Max	Min
27	2.7	-	2.7	>2.2
45	5.2	4.2	5.2	>4.2
52	5.2	-	5.2	>4.2

RM-S



RM-P Series

Plastic Push Pull Self-locking Connector

- Secure Push-pull Self-locking system
- High density assembly to save space
- Alignment Key and Polarized Keying System to avoid cross-interface
- Colorful nut for choice, easy for identify
- Available solder, PCB and right angle PCB contact



RM-P Series

Plugs (plastic)



PAG



PAG

Receptacles (plastic)




PKG




PLG



PKG



PRG



PRG

Plugs (metal)



PAG



PAG

Receptacles (metal)




HHG



PHG

Part Numbering System

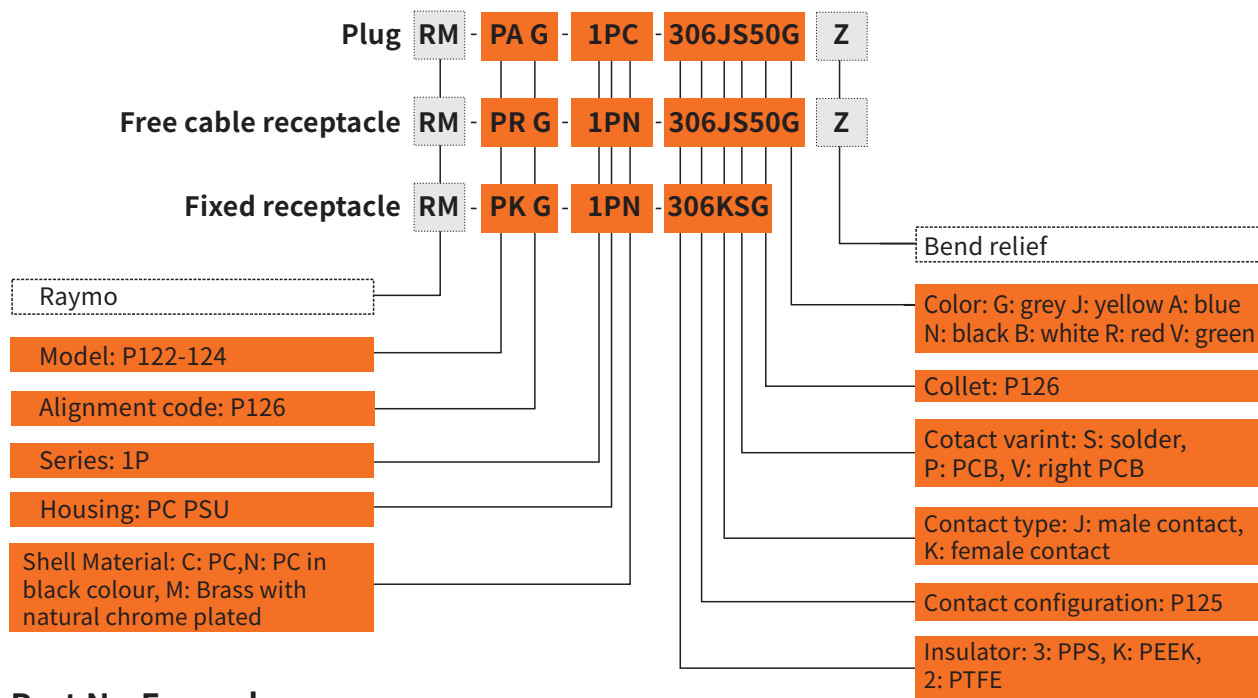

Part No.Example

Straight plug

RM-PAG-1PC-306JS52GZ= straight plug with cable collet and alignment key(G=0 degree), multipole 6 male contacts in solder type, gray outer shell, PPS insulator, collet for 4.2-5.2mm diameter cable nut for fitting a bend relief, with a gray colour bend relief.

Free cable receptacle

RM-PRG-1PC-306KS50GZ= free cable receptacle with cable collet, alignment key(G=0degree), multipole 6 female contacts in solder type, gray colour PC outer shell, PPS insulator, collet for cable 4.2-5.2mm and blue colour nut.


Fixed receptacle

RM-PKG-1PC-306KSG= fixed receptacle with two nuts and alignment key(G=0 degree), multipole 6 female contacts in solder type, gray colour PC outer shell, PPS insulator, gray colour plastic front nut.

Part Section Showing Internal Components


Cable Mount Plug

- ① Outer shell
- ② latch sleeve
- ③ Insulator
- ④ Male contact
- ⑤ Cable collet
- ⑥ Collet nut

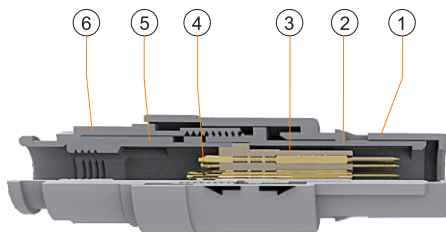

Fixed Receptacle

- ① outer shell
- ② Front notched nut
- ③ Insulator
- ④ Hexagonal nut
- ⑤ Female contact




RM-P

Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard
Endurance	>1000cycles	IEC60512-5test9a
Humidity	Up to 95% at 60°C	
Temperature range	-40°C, +120°C	
Resistance to vibration	10-2000Hz, 15g	IEC 60512-4 test 6d
Shock resistance	100g, 6ms	IEC 60512-4 test 6c
Protection index (mated)	IP50	IEC 60529
Climatical category	55/175/21	IEC 60068-1

RM-P




RM-PAG Cable Mount Straight plug


Reference		Dimensions(mm)		
Model	Series	A	L	M
RM-PAG	1P	14	46.5	32




RM-PAG Cable Mount Straight plug, nut for fitting a bend relief




Reference		Dimensions(mm)			
Model	Series	A	L	M	S1
RM-PAG	1P	14	45.5	32	9




RM-PKG Fixed Receptacle with two nuts, back panel mounting



Reference		Dimensions(mm)					
Model	Series	A	L	a	e	S1	S2
RM-PKG	1P	18.5	20.5	2.7	M14*1.0	12.5	17




RM-PLG Fixed Receptacle, all-in-one type, key(G) or and nut fixing



Reference		Dimensions(mm)					
Model	Series	A	L	a	e	S1	S2
RM-PLG	1P	19.5	20.5	2.7	M14*1.0	12.5	17




RM-PKG Fixed Receptacle with two nuts, back panel mounting elbow 90° contact for printed circuit





Reference		Dimensions(mm)					
Model	Series	A	L	a	e	S1	S2
RM-PKG	1P	19.5	20.5	2.0	M14*1.0	12.5	17.0

RM-P





RM-PRG Cable Mount Receptacle

Reference		Dimensions(mm)	
Model	Series	A	L
RM-PRG	1P	14	40



RM-PRG Cable Mount Receptacle, nut for fitting a bend relief



Reference		Dimensions(mm)			
Model	Series	A	L	M	S1
RM-PRG	1P	14	43	38.7	9



RM-HHG Fixed metal socket

Reference		Dimensions(mm)					
Model	Series	A	B	E	e	S1	S2
RM-HHG	1P	18.5	26.6	10	M14*1.0	12.5	17

























RM-P



RM-PHG Fixed metal socket

Reference		Dimensions(mm)					
Model	Series	A	B	E	e	S1	S2
RM-HHG	1P	18.5	27	3.0	M14*1.0	12.5	17


Technical Characteristics

	solder male contact 	solder female contact 	Insulator	Contact No.	ØA(MM)	Contact type			Test voltage(contact -shell)/kV AC-rms	Test voltage(contact -contact)/kV AC-rms	Rated current /A
						Solder contact	PCB straight contact	PCB elbow contact			
1P			302	2	1.3	●	●	●	1.20	1.30	10.0
			303	3	1.3	●	●	●	1.30	1.10	10.0
			304	4	0.9	●	●	●	1.05	0.80	7.0
			305	5	0.9	●	●	●	1.05	0.80	7.0
			306	6	0.7	●	●	●	1.05	0.85	6.0
			307	7	0.7	●	●	●	1.05	0.85	5.0
			308	8	0.7	●	●	●	1.05	0.60	5.0
			309	9	0.5	●	●	●	0.85	0.60	3.0
			310	10	0.5	●	●	●	0.85	0.45	3.0
			312	12	0.5	●	●	●	0.60	0.50	2.0
			314	14	0.5	●	●	●	0.60	0.50	2.0

- First choice alternative
- Special order alternative


RM-P

RM-P series Cable collet



ΦA(mm)	CableΦ(mm)	
	Min	Max
3.9	3.9	2.7
5.2	4.0	5.2
6.5	5.3	6.5

Alignment keys:




G=standard key

G



A=two keys with 40 degree

A




B=two keys with 60 degree

B




C=two keys with 80 degree

C



H=two keys with 170 degree

H



J=two keys with 155 degree

J

RM-P

RM-H Series

Metal Miniature Push Pull Self-locking Connector

- Secure high performance push pull self-locking system
- High pin density and light weight construction
- Alignment key and polarized keying system to avoid cross-interface
- 360° EMC shielded
- Robust and shock resistant designs
- Available solder, PCB contact




RM-H Series


Plugs



HR10A



HR10A




HR25A

Receptacles



HR10A



HR10A




HR10A



HR10A

Part Numbering System

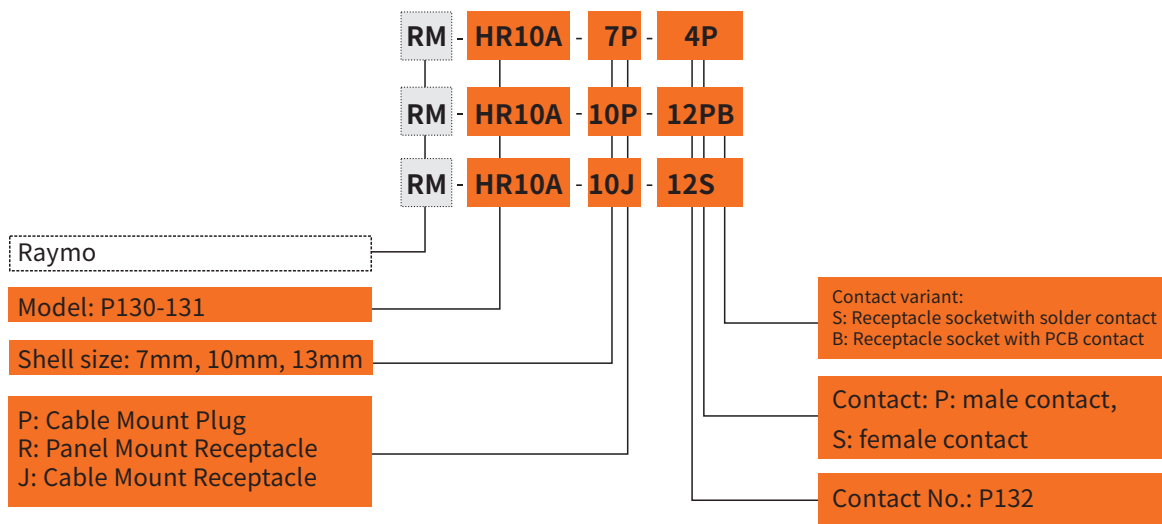

Part No.Example

Straight plug with cable collet

RM-HR10A-7P-6P= Cable Mount plug, HR10A series, 7mm shell, multipole 6 contacts, male in solder type, brass-alloyed shell with nickel plated, PPS insulator, black colour bend relief for OD 4.2-5.0mm cable.

Fixed receptacle

RM-HR10A-10R-12PN= Fixed receptacle, 10mm shell size, 12 pin male contact in PCB type, outshell in nickel-plated brass, PPS insulator.


Free cable receptacle

RM-HR10A-10J-12S= Free cable receptacle with cable collet, 10mm shell size, 12 female contact outshell in nickel-plated brass, PPS insulator, with a black colour bend relief.

Part Section Showing Internal Components


Straight Plug

- ① Male contact
- ② Insulator
- ③ Inner shell
- ④ Snap Spring
- ⑤ Outer shell
- ⑥ Ground crown
- ⑦ Screw
- ⑧ U collet nut

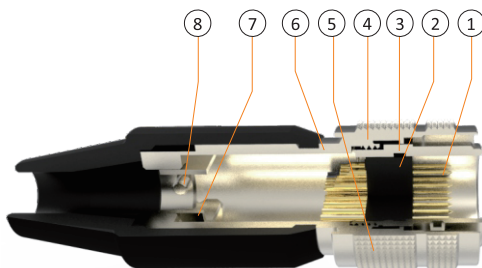


Fixed Receptacle

- ① Locking spring
- ② Outer shell
- ③ Insulator
- ④ Locking gasket
- ⑤ Hexagonal nut
- ⑥ Female contact




RM-H




HR10A Cable mount plug

Reference		Dimensions(mm)			
Model	No.of pins	A	B	C	D
7mm	4,6	35	11.5	7.5	5
10mm	10,12	43	14.7	9	7
13mm	20	58.8	19	13	7





HR10A Cable mount plug

Reference		Dimensions(mm)			
Model	No.of pins	A	B	C	D
10mm	10,12	39.5	14.7	9.5	7




HR10A Panel mount receptacle

Reference		Dimensions(mm)				
Model	No.of pins	A	B	C	D	E
7mm	4,6	14	11	8.85	M11*0.75	10
10mm	10,12	16	14	11.9	M11*0.75	13
13mm	20	19.2	18	15.4	M8*0.5	17




HR10A Panel mount receptacle, printed PCB contact

Reference		Dimensions(mm)				
Model	No.of pins	A	B	C	D	E
7mm	4,6	15.6	11	8.85	M8*0.5	10
10mm	10,12	15.6	14	11.9	M11*0.75	13
13mm	20	17.8	18	15.4	M14*0.5	17




HR10A Panel mount receptacle

Reference		Dimensions(mm)				
Model	No.of pins	A	B	C	D	E
10mm	10,12	16	14	M11*0.75	M11*0.75	9.6



HR10 Cable mount receptacle

Reference		Dimensions(mm)			
Model	No.of pins	A	B	C	D
7mm	4,6	35.3	11	8.85	10
10mm	10,12	43	14	11.9	13



HR25A push pull self-latching plug

Reference		Dimensions(mm)			
Model		D	L	S1	MAX Ø
HR25A		13	32.8	10	6.5

Insulator Configuration


shell size	7 mm			10 mm	
Contact No. view					
Contact No.	4	5	6	10	12
Test Voltage	AC500V for a minute	AC300V for a minute		AC300V for a minute	
Test Current	2A	2A		2A	
Insulation Resistance	MIN 1000MΦ	MIN 1000MΦ		MIN 1000MΦ	
Contact Resistance	MAX 10mΦ	MAX 10mΦ		MAX 10mΦ	
Solder cup OD	Φ0.8	Φ0.8		Φ0.8	

shell size	13 mm	25 mm
Contact No. view		
Contact No.	20	20
Test Voltage	AC300V for a minute	AC300V for a minute
Test Current	2A	2A
Insulation Resistance	MIN 1000MΦ	MIN 1000MΦ
Contact Resistance	MAX 10mΦ	MAX 10mΦ
Solder cup OD	Φ0.8	Φ0.8

Note:


- 1: Above view is from socket front view.
- 2: Voltage is test voltage.
- 3: Insulator resistance is tested based on DC100V.
- 4: Contact resistance is tested based on DC100V.

Receptacle PCB type pinout

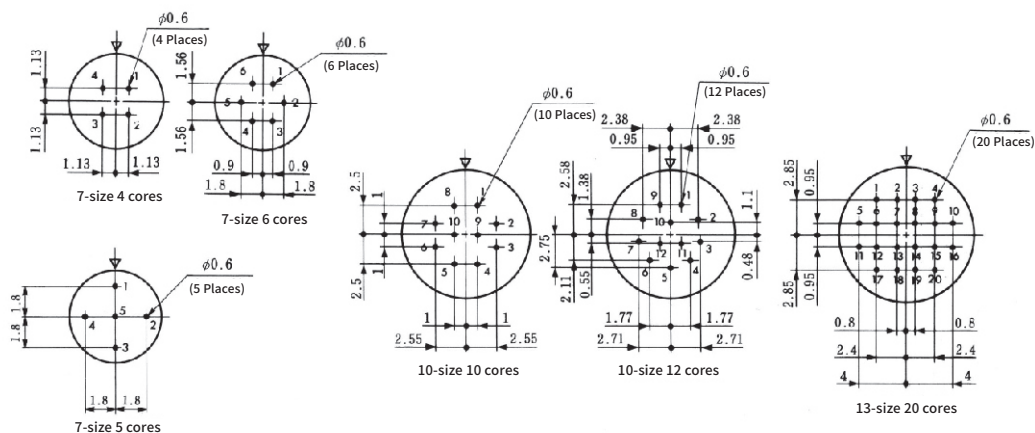


RM-H







Reference		Dimensions(mm)			
Model	Series	A	B	L	N
TFG.0F01C.GSW-65	0F	9.8	4	12.5	65
TFG.1F01C.GSW-85	1F	12.0	4	15.5	85
TFG.AF01C.GSW-85	AF	12.5	4	14	85
TFG.AF01C.GSW-120	2F	15.6	4	15	120




Reference		Dimensions(mm)				
Model	Series	A	B	L	M	N
ZFG.0F03C.GSW-60	0F	11	9.9	12.8	3	60
ZFG.1F03C.GSW-85	1F	14	12	19.9	6.4	85
ZFG.AF03C.GSW-100	AF	14.6	11.7	18.4	8.5	85
ZFG.2F03C.GSW-150	2F	16	11	19.2	7	85



Reference		Dimensions(mm)					
Model	Series	A	B	C	L	M	N
ZFG.0F01C.GSW.005-60	0F	11.5	6.5	9.1	12.8	3	60
ZFG.1F01C.GSW.009-85	1F	14	8.5	14.1	10.5	4.5	85
ZFG.AF01C.GSW.009-85	AF	14	5.8	14.1	13.7	2.3	85
ZFG.2F01C.GSW.014-120	2F	16	8.9	16.1	17.0	4.9	120




Reference		Dimensions(mm)				
Model	Series	A	B	L	M	N
ZFG.0B01C.GSW.007-85	0S-0B	10.0	9.0	10.5	4.5	85
ZFG.1B01C.GSW.007-85	1S-1B	14.0	9.5	12.5	5.0	85
ZFG.2B01C.GSW.007-85	2S-2B	18.0	12.0	14.0	6.0	85
ZFG.3B01C.GSW.007-120	3S-3B	22.0	14.0	18.0	8.0	120




Reference		Dimensions(mm)			
Model	Series	A	B	L	N
TFG.0B01C.GSW-60	0B	10.6	4	10	60
TFG.1B01C.GSW-85	1B	12.0	4.5	12.2	85
TFG.2B01C.GSW-85	2B	15.0	5	13.8	85
TFG.2B01C.GSW-95	3B	18.5	5	18.5	95


RM




Reference		Dimensions(mm)				
Model	Series	A	B	L	N	
TFG.0K01C.GSW-85	0K	14.0	6	12.5	85	
TFG.1K01C.GSW-85	1K	16	5	15.5	85	
TFG.2K01C.GSW-85	2K	19.5	5	17.5	85	
TFG.3K01C.GSW-120	3K	23.0	6	22.0	120	



Reference		Dimensions(mm)				
Model	Series	A	B	M	L	N
ZFG.0K01C.GSW-85	0K	15	7	4	15	85
ZFG.1K01C.GSW-85	1K	17	5.8	6	20	85
ZFG.2K01C.GSW-85	2K	20.5	5.8	8	24	85



Reference		Dimensions(mm)				
Model	Series	A	B	L	M	S1
ZFG.0F04	0F	11.9	11.8	40	6.3	8.0
ZFG.1F04	1F	14.1	14.0	60	7.2	12.5
ZFG.AF04	AF	14.1	14.0	60	7.2	12
ZFG.2F04	2F	16.1	16.0	60	8.0	14.5




Reference		Dimensions(mm)				
Model	Series	A	B	L	M	S1
ZFG.0B04	0B	11.9	9.0	40	6.3	8.0
ZFG.1B04	1B	14.1	12.0	60	7.2	10.5
ZFG.2B04	2B	16.1	15.0	60	7.2	13.5

Main characteristics

Material: TPU (Thermoplastic Polyurethane)

Temperature range in dry atmosphere: -60°C+200°C



Shell Size	CableΦ		Dimensions (mm)		Part Number
	min	max	A	L	
00	2.8	3.1	2.8	22	RM-GMA-0B-028-DN
	3.0	3.4	2.5	24	RM-GMA-0B-025-DN
0B	2.5	3.0	3.0	24	RM-GMA-0B-030-DN
0S	3.0	3.5	3.5	24	RM-GMA-0B-035-DN
0K	3.5	4.0	4.0	24	RM-GMA-0B-040-DN
0F	4.0	4.5	4.5	24	RM-GMA-0B-045-DN
	4.5	5.5	5.5	27	RM-GMA-0B-055-DN
1B	4.0	4.4	4.0	30	RM-GMA-1B-040-DN
1S	4.5	4.9	4.5	30	RM-GMA-1B-045-DN
1K	5.4	6.0	5.4	30	RM-GMA-1B-054-DN
1F	6.5	7.0	6.5	30	RM-GMA-1B-065-DN
	5.0	5.5	5.0	36	RM-GMA-2B-050-DN
2B	6.0	6.5	6.0	36	RM-GMA-2B-060-DN
2K	7.0	7.7	7.0	36	RM-GMA-2B-070-DN
	7.8	8.8	7.8	36	RM-GMA-2B-080-DN
	9.0	9.9	9.0	36	RM-GMA-2B-090-DN
3S	4.5	5.2	4.5	42	RM-GMA-3B-050-DN
3B	6.0	6.9	6.0	42	RM-GMA-3B-060-DN
3K	7.0	7.9	7.0	42	RM-GMA-3B-070-DN
	8.0	8.9	8.0	42	RM-GMA-3B-080-DN
	9.0	10.0	9.0	42	RM-GMA-3B-090-DN
1P	2.7	3.9	3.9	30	RM-GMA-1P-039-DG
	4.0	5.2	5.2	30	RM-GMA-1P-052-DG
	5.2	6.5	6.5	30	RM-GMA-1P-065-DG

Note:


The last letter «G» of the part number indicates the gray colour of the bend relief. For ordering a bend relief with another colour, and replace the letter «G» by the letter of the required colour.

A bend relief made from thermoplastic polyurethane elastomer can be fitted over RAYMO plugs and receptacles that are supplied with nut for fitting such bend relief. They are available in nine different colours match with the GRA insulating washers. Each color has the code listed below.

Code	Colour
A	Blue
B	White
G	Gray
J	Yellow
M	Brown
N	Black
R	Red
S	Orange
V	Green

RM

Panel cut-outs

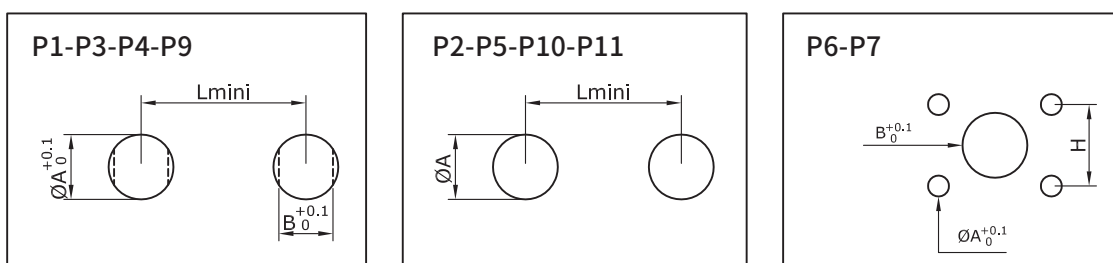

RM-B series

Series	P1			P2		P3			P4			P5		P9			P10	
	ØA	B	L	ØA	L	ØA	B	L	ØA	B	L	ØA	L	ØA	B	L	ØA	L
00	7.1	6.4	12.5	7.1	11.5	-	-	-	-	-	-	-	-	7.1	6.4	12.0	-	-
0B	9.1	8.3	14.5	9.1	13.5	14.1	12.6	20.1	10.1	9.1	15.0	8.3	10.5	9.1	8.3	15.0	-	-
1B	12.1	10.6	18.5	-	-	16.1	14.6	22.0	14.1	12.6	21.0	11.2	14.0	12.1	10.6	19.0	11.1	17.0
2B	15.1	13.6	22.5	-	-	19.2	17.1	28.0	16.1	15.1	23.0	13.9	18.0	15.1	13.6	23.0	-	-
3B	18.2	16.6	27.0	-	-	-	-	-	20.2	18.6	29.5	-	-	18.2	16.6	27.0	-	-

Cut-out types

Model	Type	Model	Type
ECG	P1	HCG	P3
EEG	P1	HEG	P9
EHG	P1	HGG	P9
EXG	P2/P10	HHG	P9
FAG	P1	PFG	P1

Mounting nut torque

Series	Torque(Nm)	
	Metal shell	Plastic shell
00	1.0	0.4
0B	2.5	0.4
1B	4.5	0.7
2B	6.0	0.8
3B	9.0	1.0

RM-K series

Series	P1			P6			P7		
	ØA	B	L	ØA	B	L	ØA	B	L
0K	14.1	12.6	20.5	-	-	-	-	-	-
1K	16.1	14.6	22.5	-	-	-	-	-	-
2K	20.2	18.6	29.0	-	-	-	-	-	-
3K	24.2	22.6	35.5	3.5	22.6	20.6	3.5	23.1	23.0

Cut-out types

Model	Type
ECG	P1
ECG	P1

Mounting nut torque

Series	Torque (Nm)
0K	5
1K	7
2K	9
3K	12

RM-S series

Series	P1			P2		P3			P4			P6			P7			P10	
	∅A	B	L	∅A	L	∅A	B	L	∅A	B	L	∅A	B	H	∅A	B	H	∅A	L
00	7.1	6.4	12.5	7.1	11.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0S	9.1	8.3	14.5	9.1	13.5	12.1	10.6	20.0	10.1	9.1	15.0	-	-	-	-	-	-	-	-
1S	12.1	10.6	18.5	12.1	19.0	14.1	12.6	21.0	12.1	10.6	18.0	3.3	12.1	12.7	2.7	11.1	12.4	11.1	17.0
2S	15.1	13.6	22.5	15.1	21.5	16.1	14.6	22.0	16.1	15.1	23.1	3.3	15.1	15.5	-	-	-	-	-
3S	18.2	16.6	27.0	18.2	27.0	20.2	18.6	30.0	20.2	18.6	29.0	3.3	18.2	18.0	-	-	-	-	-


Cut-out types

Model	Type
ERG	P1
ERD	P1


Mounting nut torque

Series	Torque(Nm)	
	Metal shell	Plastic shell
0S	2.5	0.4
1S	4.5	0.7
2S	6.0	0.8
3S	9.0	1.0


PCB drilling pattern Fixed receptacle with straight print contact (RM-B-K series)




Series	Dimensions(mm)	
	A	B
00	0.6	1.2
0B-0K	0.8	2.2
1B-1K	0.8	2.8
2B-2K	0.8	4.4




Series	Dimensions(mm)		
	A	B	C
00	0.6	1.35	120°
0B-0K	0.8	2.30	120°
1B-1K	0.8	3.00	120°
2B-2K	0.8	4.60	120°
3B-3K	0.8	5.60	120°




Series	Dimensions(mm)		
	A	B	C
00	0.6	1.6	45°
0B-0K	0.8	2.5	45°
1B-1K	0.8	3.1	45°
2B-2K	0.8	5.0	45°
3B-3K	0.8	6.2	45°




Series	Dimensions(mm)		
	A	B	C
0B-0K	0.6	2.8	72°
1B-1K	0.8	3.4	72°
2B-2K	0.8	5.2	72°
3B-3K	0.8	6.7	72°




Series	Dimensions(mm)		
	A	B	C
0B-0K	0.6	3.0	60°
1B-1K	0.8	3.7	60°




Series	Dimensions(mm)		
	A	B	C
2B-2K	0.8	5.6	72°
3B-3K	0.8	7.1	72°




Series	Dimensions(mm)		
	A	B	C
0B-0K	0.6	3.0	60°
1B-1K	0.8	3.7	60°
2B-2K	0.8	5.8	60°
3B-3K	0.8	7.08	60°




Series	Dimensions(mm)		
	A	B	C
1B-1K	0.8	3.8	51°26'




Series	Dimensions(mm)		
	A	B	C
2B-2K	0.8	6.4	45°
3B-3K	0.8	7.5	45°



Series	Dimensions(mm)		
	A	B	C
0B-0K	0.6	3.2	45°
3B-3K	0.8	7.5	45°




Series	Dimensions(mm)			
	A	B	C	H
1B-1K	0.6	3.95	45°	1.40
2B-2K	0.8	6.2	45°	2.15
3B-3K	0.8	7.9	45°	2.80




Series	Dimensions(mm)			
	A	B	C	H
2B-2K	0.8	6.5	45°	2.80
3B-3K	0.8	8.2	45°	3.40

RM


PCB drilling pattern Fixed receptacle with straight print contact (B-K series)




Series	Dimensions(mm)				
	A	B	C	H	I
1B-1K	0.6	4.4	90°	1.90	1.80
2B-2K	0.8	6.5	90°	2.65	2.65
3B-3K	0.8	8.2	90°	3.40	3.40




Series	Dimensions(mm)			
	A	B	C	H
1B-1K	0.6	4.4	32°44'	2.0



Series	Dimensions(mm)			
	A	B	C	H
2B-2K	0.8	6.6	32°44'	3.10
3B-3K	0.8	8.4	32°44'	3.86




Series	Dimensions(mm)			
	A	B	C	H
2B-2K	0.8	6.7	30°	3.5
3B-3K	0.8	8.4	30°	4.34





Series	Dimensions(mm)			
	A	B	C	H
2B-2K	0.8	6.7	30°	3.50

Length of straight print contacts (for receptacle)


Series	Contact No.	Dimensions(mm)	
		ØC	L
00	302	0.5	3.0
	302	0.5	3.0
	302	0.5	3.0
0B 0K	302/303	0.7	3.2
	304/305	0.5	3.2
	306/307/309	0.5	3.2
1B 1K	302/303/303/304/305	0.7	3.0
	306/307/308	0.7	3.0
	310/314/316	0.5	4.0
2B 2K	302/303/304/305/306/307	0.7	3.0
	308/310/314/316/318/319	0.7	3.0
	326/332	0.5	3.0
3B 3K	303/304/305/306/307	0.7	3.0
	308/309/310/312/314/316/318	0.7	3.0
	320/322/324/326/330	0.5	5.0




PCB drilling pattern Fixed receptacle with straight print contact (B-K series)















Series	Dimensions (mm)	
	A	
00	0.6	
0B-0K	0.7	
1B-1K	0.9	
2B-2K	0.9	












Series	Dimensions(mm)	
	A	L
00	0.6	1.27
0B-0K	0.7	1.27
1B-1K	0.9	1.27
2B-2K	0.9	2.54



Series	Dimensions(mm)	
	A	L
00	0.6	2.54
0B-0K	0.7	2.54
2B-2K	0.7	2.54
3B-3K	0.9	3.50



PCB drilling pattern Fixed receptacle with elbow (90°) print contact (RM-B-K series)

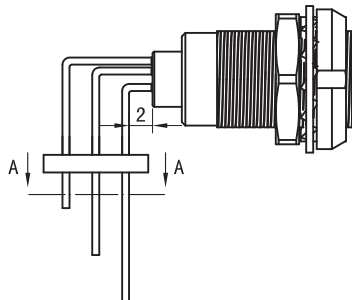




Cable




FC.PUR.N01.1802

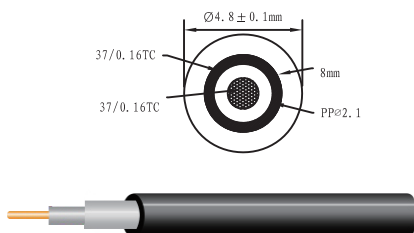


SPECIFICATION		Φ4.8(37/0.16TC+SP37/0.16TC) cold-proof-40°C pu cable
CONDUCTOR	SIZE	0.75 mm ² +0.75 mm ²
	SPECIFICATION MATERIAL	Tin-Coated Coppe
	CONSTRUCTION	& 37/0.16TC
INSULATION	COLOR	tin colour
	AVG. THICK	0.4845mm
	MIN. THICK	0.4246mm
	DIAMETER	Φ2.1+0.05mm
SHIELDED	MATERIAL	PP
	CONSTRUCTION	37/0.16TC±1+PT
	COLOR	white
JACKET	MATERIAL	Tin-Coated Coppe
	CONSTRUCTION	37/0.16TC±1+PT
	AVG. THICK	1.2101
	MIN. THICK	1.1876
MARKING	DIAMETER	4.8±0.1mm
	MATERIAL	cold-proof-40°C pu cable
	COLOR	matt black colour
MARKING		no letter printed on the cable surface

FC.PUR.N01.2001

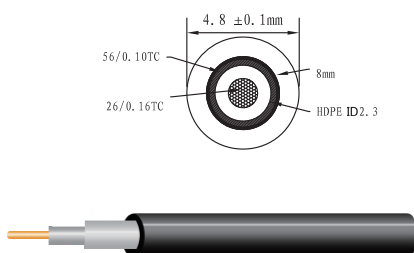


SPECIFICATION		Φ4.8(26/0.16TC ID2.3+SP56/0.10TC) cold-proof-40°C pu cable
CONDUCTOR	SIZE	20AWG
	SPECIFICATION MATERIAL	Tin-Coated Coppe
	CONSTRUCTION	& 26/0.16TC
INSULATION	COLOR	tin colour
	AVG. THICK	0.4845mm
	MIN. THICK	0.4246mm
	DIAMETER	Φ2.3±0.05mm
SHIELDED	MATERIAL	HDPE
	CONSTRUCTION	56/0.10TC±2+PT
	COLOR	white
JACKET	MATERIAL	Tin-Coated Coppe
	CONSTRUCTION	56/0.10TC±2+PT
	AVG. THICK	1.2101
	MIN. THICK	1.1876
MARKING	DIAMETER	4.8±0.1mm
	MATERIAL	cold-proof-40°C pu cable
	COLOR	matt black colour
MARKING		no letter printed on the cable surface

FC.PUR.N01.2601

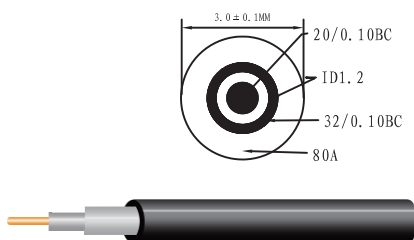


SPECIFICATION		Φ3.0(20/0.10BC++32/0.10Winding shield) cold-proof-40°C pu cable for RCA connector
CONDUCTOR	SIZE	&26AWG
	SPECIFICATION MATERIAL	Bare copper
	CONSTRUCTION	&20/0.10BC
INSULATION	COLOR	Bare copper
	AVG. THICK	0.4845mm
	MIN. THICK	0.4246mm
	DIAMETER	1.2±0.05mm
SHIELDED	MATERIAL	PP
	CONSTRUCTION	32/0.10BC
	COLOR	transparent
JACKET	MATERIAL	Bare copper
	CONSTRUCTION	32/0.10BC
	AVG. THICK	0.8001
	MIN. THICK	0.7845
MARKING	DIAMETER	3.0±0.1mm
	MATERIAL	cold-proof-40°pu cable
	COLOR	matt black colour
MARKING		no letter printed on the cable surface

FC.PUR.N01.0301

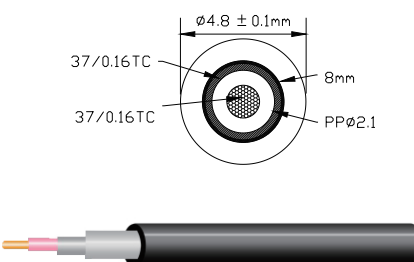


SPECIFICATION		Φ13.0 1C*25mm2+B(braided)+P(cotton paper)	
CONDUCTOR	SIZE	03AWG	
	SPECIFICATION MATERIAL	Bare copper	
	CONSTRUCTION	196/0.404MM	
INSULATION	COLOR	Bare copper	
	AVG. THICK	5.10INCH	
	MIN. THICK	0.4246mm	
	DIAMETER	10.0+0.20MM	
SHIELDED	MATERIAL	PP	
	CONSTRUCTION	37/0.16TC±1+PT	
	COLOR	transparent	
JACKET	MATERIAL 1	24*10/0.12MM (Tin-Coated Copper) (10)(covering: 85%MIN)	
	MATERIAL 1	cotton paper 0.04*40MM (covering:125%MIN)	
	DIAMETER	Φ13.00±0.30MM	
	MATERIAL	PU-813/85A(-40°C+80°C) (flame retardant rating: VW-1)	
MARKING	COLOR	matt black colour	
	MARKING		no letter printed on the cable surface

FC.PUR.N02.1701

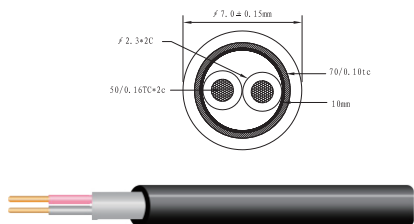


SPECIFICATION	Φ7.0(50/0.16TCID2.3*2c red black+AL+70/0.10TC Winding shield)80A cold-proof-40°CPU black	
CONDUCTOR	SIZE	1.0 mm ²
	SPECIFICATION MATERIAL	Tin-Coated Coppe
	CONSTRUCTION	&50/0.16TC ± 2
INSULATION	COLOR	tin colour
	AVG. THICK	0.4954mm
	MIN. THICK	0.4722mm
	DIAMETER	Φ2.3mm
	MATERIAL	PE+color concentrate
SHIELED	COLOR	red black
	MATERIAL	Tin-Coated Coppe
JACKET	CONSTRUCTION	SP70/0.10TC ± 4
	AVG. THICK	0.8001mm
	MIN. THICK	0.7652mm
	DIAMETER	7.0mm ± 0.15
	MATERIAL	80A PU cold-proof-40°C PU
COLOR	matt black colour	
MARKING	no letter printed on the cable surface	

FC.PUR.N02.2201

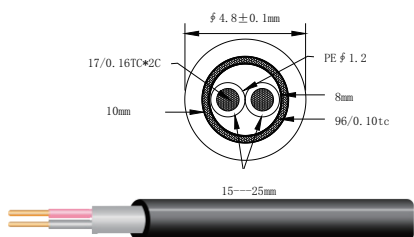


SPECIFICATION	Φ4.8(17/0.16TCID1.2*2C white green +AL+braided 96/0.10TC+PT)80A cold-proof-40°C PU black	
CONDUCTOR	SIZE	22AWG
	SPECIFICATION MATERIAL	Tin-Coated Coppe
	CONSTRUCTION	&17/0.16TC
INSULATION	COLOR	tin colour
	AVG. THICK	0.2021mm
	MIN. THICK	0.1985mm
	DIAMETER	1.2mm ± 0.05
	MATERIAL	PE
SHIELED	COLOR	white green
	MATERIAL	Tin-Coated Copper
JACKET	CONSTRUCTION	AL+braided96/0.10TC ± 6
	AVG. THICK	1.855mm
	MIN. THICK	1.542mm
	DIAMETER	4.8mm ± 0.1
	MATERIAL	80A PU cold-proof-40°C PU
COLOR	matt black colour	
MARKING	no letter printed on the cable surface	

FC.PUR.N03.1802

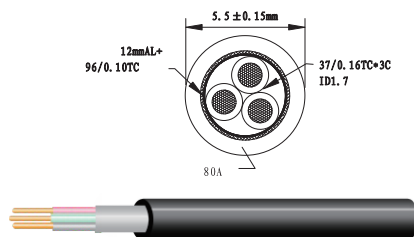


SPECIFICATION	Φ5.5(37/0.16TCID1.7*3c red black yellow +AL+ 96/0.10braided)80A cold-proof-40°C PU black	
CONDUCTOR	SIZE	0.75mm ² *3c
	SPECIFICATION MATERIAL	Bare copper
	CONSTRUCTION	& 37/0.16TC ± 1
INSULATION	COLOR	tin colour
	AVG. THICK	0.3804mm
	MIN. THICK	0.3254mm
	DIAMETER	Φ1.7 ± 0.05
	MATERIAL	PE+color concentrate
SHIELED	COLOR	red black yellow
	MATERIAL	Tin-Coated Copper
JACKET	CONSTRUCTION	AL+96/0.10TC ± 6
	AVG. THICK	0.6800mm
	MIN. THICK	0.6542mm
	DIAMETER	5.5mm ± 0.1
	MATERIAL	80A PU cold-proof-40°C PU
COLOR	matt black colour	
MARKING	no letter printed on the cable surface	

FC.HPU.N03.2401

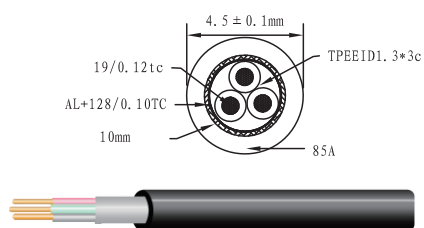


SPECIFICATION	Φ4.5(19/0.12TCID1.3*3c black brown blue +AL+ 128/0.10TC braided+PT)85A Flame-retardant High-temperature-resistance 120°C PU black	
CONDUCTOR	SIZE	24AWG*3c
	SPECIFICATION MATERIAL	Tin-Coated Copper
	CONSTRUCTION	& 19/0.12TC
INSULATION	COLOR	tin colour
	AVG. THICK	0.34mm
	MIN. THICK	0.3mm
	DIAMETER	Φ1.3 ± 0.05
	MATERIAL	TPEE+color concentrate
SHIELED	COLOR	black brown blue
	MATERIAL	Tin-Coated Copper
JACKET	CONSTRUCTION	15MMAL+16/8/0.10TCbraided
	AVG. THICK	0.65mm
	MIN. THICK	0.6mm
	DIAMETER	4.5mm ± 0.1
	MATERIAL	85A Flame-retardant High-temperature-resistance 120°CPU black
COLOR	matt black colour	
MARKING	no letter printed on the cable surface	

FC.PUR.N04.2401

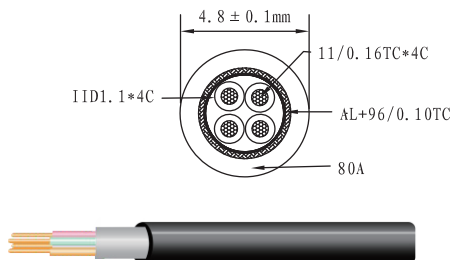


SPECIFICATION	Φ4.8(11/0.16TC*4C red yellow black green PE+AL+96/0.10TC+PT)80A cold-proof-40°C PU black	
CONDUCTOR	SIZE	24 AWG
	SPECIFICATION MATERIAL	Tin-Coated Copper
	CONSTRUCTION	&11/0.16
	COLOR	tin colour
INSULATION	AVG. THICK	0.242 mm
	MIN. THICK	0.217 mm
	DIAMETER	Φ1.1mm±0.05
	MATERIAL	PE
SHIELDED	MATERIAL	Tin-Coated Copper
	CONSTRUCTION	8mmAL+96/0.010TC±5+10mmPT
JACKET	AVG. THICK	0.80mm
	MIN. THICK	0.775mm
	DIAMETER	4.8mm±0.1
	MATERIAL	80A PU cold-proof-40°C
MARKING	COLOR	black colour
	no letter printed on the cable surface	

FC.PUR.N04.2426

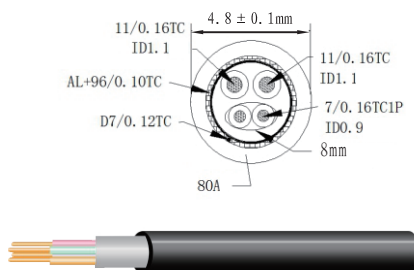


SPECIFICATION	Φ4.8(7/0.16TC*1P white green PE+AL+11/0.16TC*2CP red black +AL+D7/0.12TC+96/0.10TC)80A cold-proof-40°C PU black	
CONDUCTOR	SIZE	26AWG & 24AWG
	SPECIFICATION MATERIAL	Tin-Coated Copper
	CONSTRUCTION	7/16&11/0.16
	COLOR	tin colour
INSULATION	AVG. THICK	0.242 mm
	MIN. THICK	0.217 mm
	DIAMETER	Φ0.9mm & 1.1mm±0.05
	MATERIAL	PE
SHIELDED	MATERIAL	AL+Tin-Coated Copper
	CONSTRUCTION	8mmAL+16/6/0.10TC±6
JACKET	AVG. THICK	0.80mm
	MIN. THICK	0.775mm
	DIAMETER	4.8mm±0.1
	MATERIAL	80A cold-proof-40°C PU black
MARKING	COLOR	matt black colour
	no letter printed on the cable surface	

FC.PUR.N05.2401

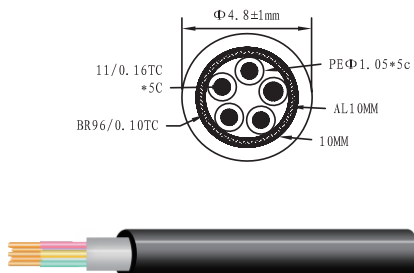

SPECIFICATION	Φ4.8(11/0.16TC*1.1PE*5Cred black white blue green+AL+BR96/0.10TC+PT)80A cold-proof-40°CPU black	
CONDUCTOR	SIZE	24 AWG
	SPECIFICATION MATERIAL	Tin-Coated Copper
	CONSTRUCTION	11/0.16
	COLOR	tin colour
INSULATION	AVG. THICK	0.2135mm
	MIN. THICK	0.2085mm
	DIAMETER	Φ1.05±0.05
	MATERIAL	PE
SHIELDED	MATERIAL	Tin-Coated Copper
	CONSTRUCTION	10mmAL+BR96/0.10±6+PT
JACKET	AVG. THICK	1.275mm
	MIN. THICK	1.125mm
	DIAMETER	4.8mm±0.1
	MATERIAL	80A cold-proof-40°C PU black
MARKING	COLOR	matt black colour
	no letter printed on the cable surface	


FC.PUR.N05.2426



SPECIFICATION	(2C*24AWG black red+3C*26AWG green blue white+AL+B+P) PU-813/80A(Black)(Non-flame-retardant) (temperature-resistance: -40°C--+80°C)	
CONDUCTOR	SIZE	24AWG & 26 AWG
	SPECIFICATION MATERIAL	TA
	CONSTRUCTION	11/0.16&7/0.16
	STRANDED LAY	0.7INCH&0.6INCH
INSULATION	DIAMETER	Φ2.05mm±0.05
	MATERIAL	HD-PE
STRANDED	COLOR	black red green blue white
	STRANDED LAY	60±10MM
	AL-FOIL SPECIFICATION	0.02*15MM(Conductive facing outside)
SHIELDED	OVERLAP RATE	Above 25%
	BRAIDED MATERIAL	16*6/0.10MM
	COTTON PAPER MATERIAL	TA(12)(covering: 75%MIN)
JACKET	DIAMETER	4.8mm±0.1
	MATERIAL	PU-813/80A(Black) (Non-flame-retardant) (temperature-resistance: -40°C--+80°C)
	COLOR	matt black colour
MARKING	no letter printed on the cable surface	


RM

FC.PUR.N06.2001




SPECIFICATION	Φ7.0(6C*0.5mm2black brown red orange yellow green+AL+B)PU-813/85A(Black) (flame-retardant) 7temperature-resistance: -40°C~+80°C	
CONDUCTOR	SIZE	0.5mm ²
	SPECIFICATION MATERIAL	TA
	CONSTRUCTION	25/0.16mm
INSULATION	STRANDED LAY	0.8INCH
	DIAMETER	Φ1.50±0.05MM
	MATERIAL	SR-PVC
STRANDED	COLOR	black brown red orange yellow green
	STRANDED LAY	100±10MM
	AL-FOIL SPECIFICATION	0.02*25MM(anti-surrounding)
SHIELDED	OVERLAP RATE	Above 25%
	MATERIAL	16*7/0.12MM TA(6)
	COVERING	65%MIN
JACKET	DIAMETER	7.00±0.20MM
	MATERIAL	(flame-retardant)(temperature-resistance: -40°C~+80°C)
	COLOR	half-matt black colour
MARKING	no letter printed on the cable surface	

FC.PUR.N06.2426-1

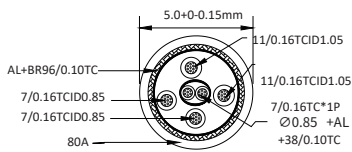


SPECIFICATION	Φ5.0(11/0.16TC*1.05*2Cred black+7/0.16TC*0.85*1P white green+38/0.10TC Winding shield+7/0.16TC*0.85*2C blue yellow+AL+96/0.10TC) 80A cold-proof-40°C PU black	
CONDUCTOR	SIZE	26AWG & 24 AWG
	SPECIFICATION MATERIAL	Tin-Coated Copper
	CONSTRUCTION	7/16& 11/0.16
INSULATION	COLOR	tin colour
	AVG . THICK	0.242 mm
	MIN . THICK	0.217 mm
STRANDED	DIAMETER	Φ0.9mm & 1.1mm±0.05
	MATERIAL	PE
	COLOR	white green & red black
JACKET	MATERIAL	AL+Tin-Coated Copper
	CONSTRUCTION	8mmAL+16/6/0.10TC±6
	AVG . THICK	0.80mm
MARKING	MIN . THICK	0.775mm
	DIAMETER	4.8mm±0.1
	MATERIAL	80A cold-proof-40°CPU black
COLOR	matt black colour	
MARKING	no letter printed on the cable surface	

FC.PUR.N07.2801

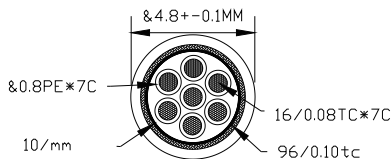


SPECIFICATION	Φ4.8<16/0.08TC ID0.8*7C)+AL+96/0.10TC braided >80A cold-proof-40°CPU black	
CONDUCTOR	SIZE	28AWG
	SPECIFICATION MATERIAL	Tin-Coated Copper
	CONSTRUCTION	16/0.08TC
INSULATION	COLOR	tin colour
	AVG . THICK	0.2305mm
	MIN . THICK	0.2013mm
STRANDED	DIAMETER	Φ0.8±0.05mm
	MATERIAL	PE
	COLOR	white black blue green brown red yellow
JACKET	MATERIAL	Tin-Coated Copper
	CONSTRUCTION	AL +braided96/0.10TC
	AVG . THICK	0.8120mm
MARKING	MIN . THICK	0.7921mm
	DIAMETER	4.8mm±0.1
	MATERIAL	80A cold-proof-40°CPU black
COLOR	matt black colour	
MARKING	no letter printed on the cable surface	

FC.PUR.N08.2603




SPECIFICATION	Φ6.0(8C HSYV +AL+96/0.10TCV braided+PT) OD6.0 cold-proof-40°C PU	
CONDUCTOR	SIZE	26AWG
	SPECIFICATION MATERIAL	Bare copper
	CONSTRUCTION	8/7/0.2BC
INSULATION	COLOR	tin colour
	AVG . THICK	0.2305mm
	MIN . THICK	0.2013mm
STRANDED	DIAMETER	Φ1.0±0.05mm
	MATERIAL	PE+color concentrate
	COLOR	yellow white+yellow blue white+blue green white+ green brown white+brown
JACKET	MATERIAL	Tin-Coated Copper
	CONSTRUCTION	AL+96/0.10TC braided
	AVG . THICK	1.0982mm
MARKING	MIN . THICK	0.9131mm
	DIAMETER	6.0±0.15mm
	MATERIAL	80A PU cold-proof-40°C PU
COLOR	matt black colour	
MARKING	no letter printed on the cable surface	

FC.PUR.N08.2601




SPECIFICATION	Φ5.(0.7/0.16BC)ID0.9*8C+AL+80/0.10 braided) +cotten gray colour cold-proof-40°C PU	
CONDUCTOR	SIZE	26AWG
	SPECIFICATION MATERIAL	Bare copper
	CONSTRUCTION	&7/0.16TC
	COLOR	Bare copper
INSULATION	AVG. THICK	0.2305mm
	MIN. THICK	0.2013mm
	DIAMETER	Φ0.9±0.05mm
	MATERIAL	HDPE
	COLOR	white black purple grey orange brown red yellow
SHIELDED	MATERIAL	Bare copper
	CONSTRUCTION	AL+80/0.10BC
JACKET	AVG. THICK	1.0982mm
	MIN. THICK	0.9131mm
	DIAMETER	5.0mm±0.15
	MATERIAL	80A cold-proof-40°C PU gray
	COLOR	gray
MARKING	no letter printed on the cable surface	

FC.PUR.N09.2628




SPECIFICATION	Φ4.8(12/0.12TC*0.85PE+2C+26/0.06TC*0.65PE*1P+AL+5C+AL+65/0.10TC+PT) cold-proof-40°C PU cable	
CONDUCTOR	SIZE	2*0.14mm ² +7*0.08mm ²
	SPECIFICATION MATERIAL	Tin-Coated copper
	CONSTRUCTION	12/0.12 & 26/0.06
	COLOR	tin color
INSULATION	AVG. THICK	0.2435mm
	MIN. THICK	0.2185mm
	DIAMETER	Φ0.85 & 0.65±0.05
	MATERIAL	PE
	COLOR	red,black,blue,purple,yellow, grey,orange,white,green
SHIELDED	MATERIAL	bare copper
	CONSTRUCTION	10mmAL+65/0.10TC braid+PT
JACKET	AVG. THICK	0.975mm
	MIN. THICK	0.925mm
	DIAMETER	Φ4.8mm±0.1
	MATERIAL	cold- proof -40°C PU cable
	COLOR	matt black color
MARKING	no letter printed on the cable surface	

FC.PUR.N09.2226



SPECIFICATION	Φ5.2(43/0.10TC1.25+44/0.08TC1.05+28/0.08TC0.85)+AL+96/0.10BR cold-proof -40°C PU cable	
CONDUCTOR	SIZE	2*0.34mm ² +2*0.22mm ² +5*0.14mm ²
	SPECIFICATION MATERIAL	Tin-Coated copper
	CONSTRUCTION	43/0.10TC 44/0.08TC 28/0.08TC
	COLOR	tin color
INSULATION	AVG. THICK	0.2305mm
	MIN. THICK	0.2013mm
	DIAMETER	&1.25 &1.05 &0.85
	MATERIAL	PE
	COLOR	red, grey blue, brown, yellow, white, purple, green, orange
SHIELDED	MATERIAL	Tin-Coated copper
	CONSTRUCTION	AL+96/0.10TC braid
JACKET	AVG. THICK	1.0982mm
	MIN. THICK	0.9131mm
	DIAMETER	Φ5.25mm±0.25
	MATERIAL	cold- proof -40°C PU cable
	COLOR	matt black color
MARKING	no letter printed on the cable surface	


FC.PUR.N10.2224



SPECIFICATION	Φ6.1(17/0.16TC ID1.3*2C+11/0.16ID1.1*8C)+AL+96/0.10TC braid cold-proof -40°C PU cable	
CONDUCTOR	SIZE	2*0.34mm ² +8*0.2m ²
	SPECIFICATION MATERIAL	Tin-Coated copper
	CONSTRUCTION	17/0.16TC 11/0.16TC
	COLOR	17/0.16TC 11/0.16TC
INSULATION	AVG. THICK	0.2690mm
	MIN. THICK	0.2453mm
	DIAMETER	&1.3 &1.1±0.05mm
	MATERIAL	PE
	COLOR	red,black, white,purple,grey, orange,brown,yellow,blue, green
SHIELDED	MATERIAL	Tin-Coated copper
	CONSTRUCTION	AL+96/0.10TC braid
JACKET	AVG. THICK	0.6185mm
	MIN. THICK	0.6014mm
	DIAMETER	Φ6.1mm±0.1
	MATERIAL	cold-proof-40°C PU cable
	COLOR	matt black color
MARKING	no letter printed on the cable surface	


RM

FC.PUR.N10.2601

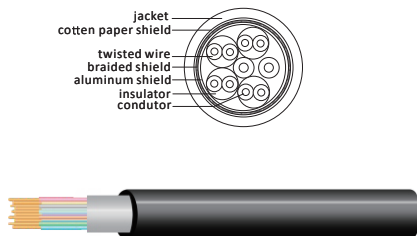


SPECIFICATION	Φ7.0(4P*26AWG+20*26AWG+AL+B+P) cold-proof -40°C PU cable	
CONDUCTOR	SIZE	10*0.14mm ²
	SPECIFICATION MATERIAL	Tin-Coated copper
	CONSTRUCTION	7/0.165MM,7/0.16MM
	COLOR	tin color
INSULATION	AVG . THICK	0.89MM
	MIN . THICK	0.87MM
	DIAMETER	±1.00±0.05MM
	MATERIAL	PE
SHIELDED	MATERIAL	Tin-Coated copper
	CONSTRUCTION	0.020*18MM
JACKET	DIAMETER	Φ7.00±0.20MM
	MATERIAL	cold-proof-40°C PU cable
	COLOR	matt black color
MARKING	no letter printed on the cable surface	

FC.PVC.N12.2801

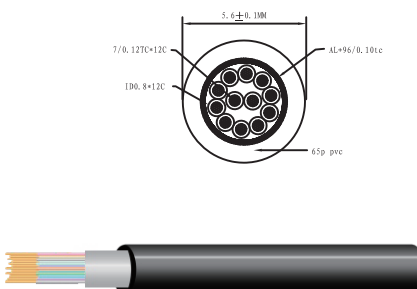


SPECIFICATION	Φ5.6(7/12TC*0.8*12C)+AL+96/0.10TC PVC cable	
CONDUCTOR	SIZE	12*0.08mm ²
	SPECIFICATION MATERIAL	Tin-Coated copper
	CONSTRUCTION	7/0.12
	COLOR	tin color
INSULATION	AVG . THICK	0.2435mm
	MIN . THICK	0.2185mm
	DIAMETER	Φ0.8
	MATERIAL	PVC
SHIELDED	MATERIAL	Bare copper
	CONSTRUCTION	AL+96/0.10TC
JACKET	AVG . THICK	0.975mm
	MIN . THICK	0.925mm
	DIAMETER	Φ5.6mm±0.15
	MATERIAL	PVC cable
MARKING	no letter printed on the cable surface	

FC.PUR.N13.2601

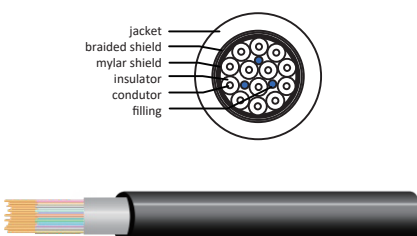

SPECIFICATION	Φ6.6(13C*26AWG+F+MY+B) VW-1 PU cable	
CONDUCTOR	SIZE	13*0.14mm ²
	SPECIFICATION MATERIAL	BA
	CONSTRUCTION	19/0.10MM
	COLOR	tin color
INSULATION	DIAMETER	Φ0.90+0.05MM
	MATERIAL	PE
	COLOR	Black,brown,red,orange,yellow, green,blue,purple,grey,white,black white, brown white, red white
	SHIELDED	MATERIAL
SHIELDED	CONSTRUCTION	16*5/0.12MM TA
	DIAMETER	Φ6.60+0.20MM
JACKET	MATERIAL	VW-1 PU cable
	COLOR	matt black color
	MARKING	no letter printed on the cable surface


FC.PUR.N14.2428-T

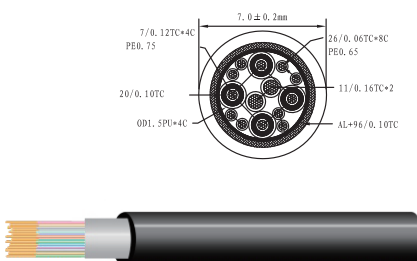

SPECIFICATION	Φ7.0(26/0.06*8C* D0.65+11/0.16tc*2c 01.1+(7/0.12tc D0.75 +sp20/0.10tc) 1.5+AL+ 96/0.10TC braid) cold-proof -40°C PU cable	
CONDUCTOR	SIZE	2*0.2mm ² +8*0.14mm ² + 4*0.08mm ² (50ohm)
	SPECIFICATION MATERIAL	Tin-Coated copper
	CONSTRUCTION	26/0.06TC11/0.16TC 7/0.12TC
	COLOR	tin color
INSULATION	AVG . THICK	0.2305mm
	MIN . THICK	0.2013mm
	DIAMETER	±0.65 & 1.1&0.75 ±0.05mm
	MATERIAL	PE
SHIELDED	MATERIAL	Tin-Coated copper
	CONSTRUCTION	20/0.10tc
JACKET	AVG . THICK	1.0982mm
	MIN . THICK	0.9131mm
	DIAMETER	7.0mm±0.25
	MATERIAL	cold-proof -40°C PU cable
MARKING	no letter printed on the cable surface	


RM

FC.PUR.N15.2401

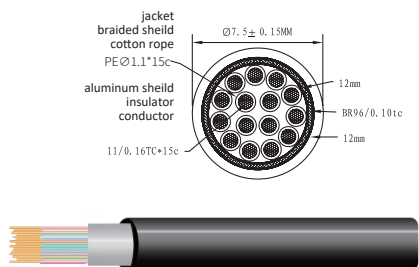


SPECIFICATION		Φ7.5(11/0.16TC*15c+AL+BR96/0.10TC+PT)Cold-proof -40°C PU cable
CONDUCTOR	SIZE	15*0.2mm ²
	SPECIFICATION MATERIAL	Tin-Coated copper
	CONSTRUCTION	&11/0.16TC
INSULATION	COLOR	tin color
	AVG. THICK	0.2435mm
	MIN. THICK	0.2113mm
	DIAMETER	Φ1.1±0.05mm
SHIELDED	MATERIAL	PE
	COLOR	white, green, red, black, blue, yellow, brown, orange, purple, grey, glassy, glassy red, glassy yellow, glassy black
JACKET	MATERIAL	Tin-Coated copper
	CONSTRUCTION	AL+BR96/0.10TC±6+PT
	AVG. THICK	0.7391mm
	MIN. THICK	0.6235mm
	DIAMETER	Φ7.5mm±0.15
MARKING	MATERIAL	cold-proof -40°C PU cable
	COLOR	matt black color
MARKING		no letter printed on the cable surface

FC.PUR.N15.2801-T

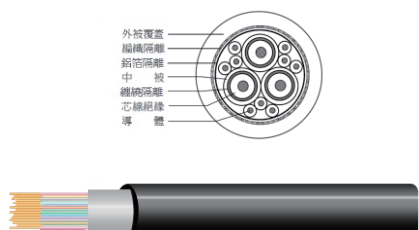


SPECIFICATION		Φ8.0(3C*UL1354(S)+9C*28AWG+AL+B/UL2919) flammability vw-1 cold-proof -55°C TPU cable
CONDUCTOR	SIZE	9*0.08mm ² +3*0.08mm ² (75ohm)
	SPECIFICATION MATERIAL	TA
	CONSTRUCTION	& 11/0.16TC
INSULATION	COLOR	TA
	DIAMETER	Φ1.60±0.05MM /0.85±0.05MM
	MATERIAL	FM-PE/SR-PVC
	COLOR	red,black,yellow,green,brown, blue,purple,orange, grey+coaxial red,green,blue
SHIELDED	MATERIAL	TA
	CONSTRUCTION	16*9/0.12MM
JACKET	DIAMETER	Φ7.80±0.20MM
	MATERIAL	UL-813/70P cold-proof-40°C Pu cable
MARKING	COLOR	matt black color
	E119932-U AWM 2919 80°C 30V VW-1 LOW VOLTAGE COMPUTER CABLE COPARTNER	

FC.TPU.N16.1401

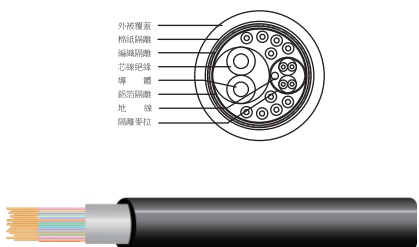

SPECIFICATION		Φ12.0(2P*26#+D+AL+MY)+(2C*14#+AL)+3C*24#+7C*26#+AL+B+P cold-proof -40°C PU cable
CONDUCTOR	SIZE	2*2.0mm ² +3*0.2mm ² +7*0.14mm ² +4*0.14mm ²
	SPECIFICATION MATERIAL	BA+TA+TA+TA
	CONSTRUCTION	7/0.165MM 41/0.254MM 7/0.20MM 7/0.16MM
INSULATION	COLOR	BA/TA
	DIAMETER	0.87-0.90MM 2.80±0.10MM 1.10±0.05MM 1.0±0.05MM
	MATERIAL	HD-PE
	COLOR	red,black+purple grey white + red black brown orange yellow green blue + green* white green+brown / white brown
SHIELDED	MATERIAL	TA
	CONSTRUCTION	24*10/0.12MM TA+0.040*40MM paper
JACKET	DIAMETER	Φ12.0±0.30MM
	MATERIAL	flammability VW-1 cold-proof-55°C TPU-813 cable
	COLOR	matt black color
MARKING		no letter printed on the cable surface


FC.PUR.N19.2428-S

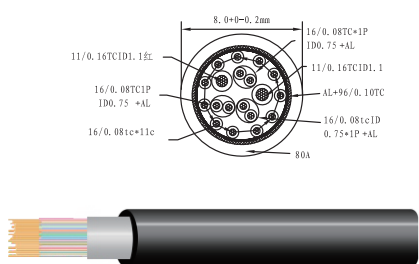

SPECIFICATION		Φ8.0 (11/0.16TC*1.1*2c+16/0.08TC*0.75*11c+16/0.08TC1P+AL+16/0.08TC1P+AL+16/0.08TC1P+AL) +AL+96/0.10TC cold-proof-40°C PU cable
CONDUCTOR	SIZE	2*2.0mm ² +17*0.08mm ²
	SPECIFICATION MATERIAL	Tin-Coated copper
	CONSTRUCTION	11/0.16 & 16/0.08
INSULATION	COLOR	tin color
	AVG. THICK	0.2435mm
	MIN. THICK	0.2185mm
	DIAMETER	Φ1.1Φ0.75±0.05
SHIELDED	MATERIAL	PE
	COLOR	red,black+white,green,red,black,blue,yellow, brown,orange,purple,grey,pink+blue*yellow, green*white,purple*orange
JACKET	MATERIAL	Bare copper
	CONSTRUCTION	15mmAL+96/0.10TC braid+PT
	AVG. THICK	0.975mm
	MIN. THICK	0.925mm
	DIAMETER	Φ8.0mm±0.2
MARKING	MATERIAL	cold-proof -40°C PU cable
	COLOR	matt black color
MARKING		no letter printed on the cable surface


RM

FC.PUR.N20.3001-T

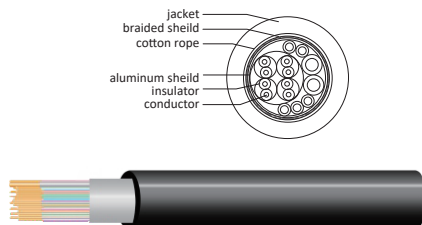

SPECIFICATION	Φ7.0(4P*28#+ AL)*1C+2C*18#+5C*26#+ AL+B+P)PU-813/85A cable	
CONDUCTOR	SIZE	4*0.05mm ² +10*0.05mm ² +0.05mm ² (75ohm)
	SPECIFICATION MATERIAL	BA/TA/TA
	CONSTRUCTION	7/0.127MM 34/0.18MM 7/0.16MM
INSULATION	COLOR	BA/TA/TA
	DIAMETER	Φ0.75±0.05MM/1.80±0.05MM/0.70±0.05MM
	MATERIAL	HD-PE/SR-PVC/HD-PE
SHIELDED	COLOR	red,yellow,brown,orange+brown*white, blue*white,red*white, green*white,black*white+coial white
	MATERIAL	TA
	CONSTRUCTION	16*8/0.12MM TA
JACKET	DIAMETER	8.00±0.20MM
	MATERIAL	PU-813/85A
	COLOR	matt black color
MARKING	no letter printed on the cable surface	

FC.PUR.N32.2830-T

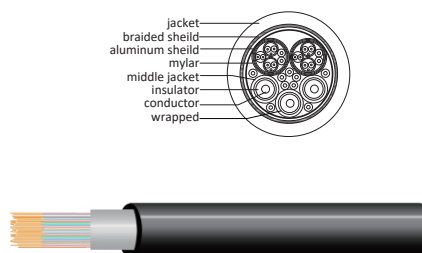

SPECIFICATION	Φ9.5 ((1c*30#+S)3C+9C*30#+((1P*32#+ DAM)2C+ 1P*32#+ 2C*28#+ ABM)2C+ AB)UL-813/70P PU cable	
CONDUCTOR	SIZE	2*0.08mm ² +3*0.05mm ² +9*0.05mm ² +6*0.03mm ² (75ohm)
	SPECIFICATION MATERIAL	TA
	CONSTRUCTION	(1c*30#+S)3C+9C*30#/((1P*32#+DAM) 2C+1P*32#+2C*28#+ABM)2c
INSULATION	COLOR	TA
	DIAMETER	Φ1.30±0.05MM/1.30±0.05MM/0.55± 0.01MM/0.50±0.05mm/0.65±0.05MM
	MATERIAL	FM-PE/PP/FM-PE+SKIN/HD-PE
SHIELDED	COLOR	red,black+pink,light green,light blue+red, black,brown,orange,yellow,green,blue, purple,gre+yellow*blue,orange*purple, green*white
	MATERIAL	TA
	CONSTRUCTION	24*8/0.12MM TA
JACKET	DIAMETER	9.50±0.20MM
	MATERIAL	UL-813/70P PU cable
	COLOR	matt black color
MARKING	no letter printed on the cable surface	

Product Safety Notice

PLEASE READ AND FOLLOW ALL INSTRUCTIONS CAREFULLY AND CONSULT ALL RELEVANT NATIONAL AND INTERNATIONAL SAFETY REGULATIONS FOR YOUR APPLICATION. IMPROPER HANDLING, CABLE ASSEMBLY, OR WRONG USE OF CONNECTORS CAN RESUSIT IN HAZARDOUS SITUATIONS.

1. SHOCK AND FIRE HAZARD

Incorrect wiring, the use of damaged components, presence of foreign objects (such as metal debris), and / or residue (such as cleaning fluids), can result in short circuits, overheating, and / or risk of electric shock. Mated components should never be disconnected while live as this may result in an exposed electric arc and local overheating, resulting in possible damage to components.

2. HANDLING

Connectors and their components should be visually inspected for damage prior to installation and assembly. Suspect components should be rejected or returned to the factory for verification. Connector assembly and installation should only be carried out by properly trained personnel. Proper tools must be used during installation and / or assembly in order to obtain safe and reliable performance.

3. USE

Connectors with exposed contacts should never be live (or on the current supply side of a circuit). Under general conditions voltages above 30 VAC and 42 VDC are considered hazardous and proper measures should be taken to eliminate all risk of transmission of such voltages to any exposed metal part of the connector.

4. TEST AND OPERATING VOLTAGES

The maximum admissible operating voltage depends upon the national or international standards in force for the application in question. Air and creepage distances impact the operating voltage; reference values are indicated in the catalog however these may be influenced by PC board design and / or wiring harnesses. The test voltage indicated in the catalog is 75% of the mean breakdown voltage; the test is applied at 500 V/S and the test duration is 1 minute.

5. CE MARKING

CE Marking is applied to a complete product or device, and implies that the device complies with one or several European safety directives. CE Marking can not be applied to electromechanical components such as connectors.

6. PRODUCT IMPROVEMENTS


SHENZHEN RAYMO ELECTRONICS TECHNOLOGY LIMITED have the right to modify and improve to our products or specifications without providing prior notification.



Certificate of High and New Technology Enterprise



SGS

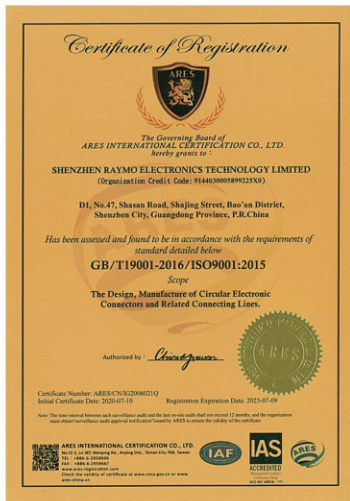

ISO9001:2015



Management System Certificate



CE



ROHS3.0



+39 02.33611626 www.elitaliaweb.it
● CONTACT US info@elitaliaweb.it