



# APPROVAL SHEET

|               |                      |
|---------------|----------------------|
| Customer:     |                      |
| Description:  | MEMS Microphone      |
| Model:        | CMM3729AT-110H62S383 |
| Customer P/N: |                      |

| Issued by | Checked by | Appoved by | Customer |
|-----------|------------|------------|----------|
|           |            |            |          |


## HUNSTON ELECTRONICS LIMITED

Website: [hunston.com.hk](http://hunston.com.hk)  
Email: [sales@hunston.com.hk](mailto:sales@hunston.com.hk)  
Tel: +852 3591 1490  
Fax: +852 3591 1491

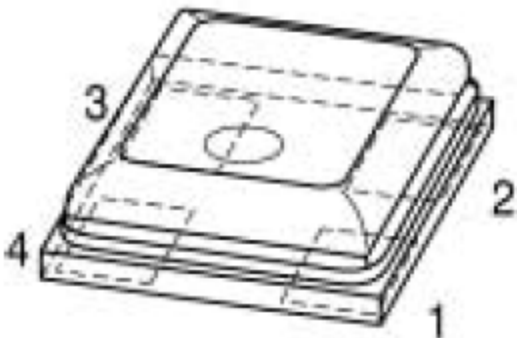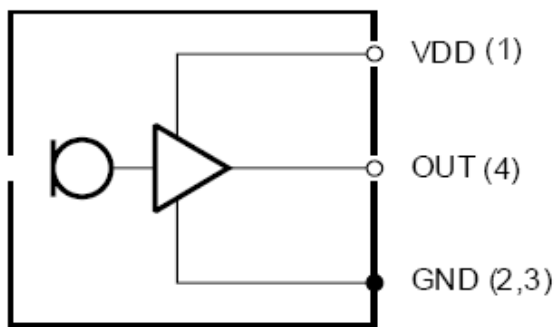
|   |  |  |
|---|--|--|
| 1 | <b>Name: Silicon MEMS Omni-directional Microphone</b>  |  |
| 2 | <b>Features:</b>   |  |
|   | 3.1  | SMD MEMS microphone for automated surface mount assembly                           |
|   | 3.2  | Reflow soldering up to 260°C (Lead free)   |
|   | 3.3  | High long-term temperature stability   |
|   | 3.4  | Stable sensitivity over power supply range of 1.5~3.6V                             |
|   | 3.5  | Low current consumption of 80uA  |
|   | 3.6  | Excellent power supply rejection of -55dB  |
|   | 3.7  | High integrated immunity to EMI  |
|   | 3.8  | RoHS-compliant, halogen-free package with small footprint and low height of 1.25mm |
| 3 | <b>Applications.</b> The CMM3729AT-110H62S383 is designed for:   |  |
|   | 4.1  | Mobile Phones (Handsets, Headsets)   |
|   | 4.2  | Consumer (Game Consoles, PDA's)  |
|   | 4.3  | Computer (Personal Computers, Notebooks)   |
|   | 4.4  | Cameras (Digital Still Cameras, Video Cameras)                                     |
|   | 4.5  | Navigation Device(Portable GPS)  |
|   | 4.6  | Blue-tooth (Headsets)  |
| 4 | <b>Product Description</b>   |  |
|   | <p>Miniature Silicon MEMS (Micro Electro Mechanical System) Omni-directional Microphone with single-ended analog interface designed for automated reflow soldering assembly as SMD (Surface Mounted Device) component. It is an alternative to conventional ECMs (Electret Condenser Microphones).</p> <p>Due to its robust design with a metallic lid and monolithic integrated EMI-blocking capacitors and utilization of Silicon MEMS technology, the CMM3729AT-110H62S383 shows high immunity to EMI (Electromagnetic Interference) and heat.</p> <p>The capped Chip-On-Board package solution contains the micromechanical sensor chip and an amplifier chip. The RoHS-compliant halogen-free device has a size of 3.76 x 2.95 x 1.10 mm<sup>3</sup>.</p> |  |
| 5 | <b>Circuit Diagram:</b>  |  |
|   |     |  |

| Pin Definition and Function   |   |                      |         |      |          |                               |
|---|---|----------------------|---------|------|----------|-------------------------------|
| Pin No.   | Symbol                                    | Function             |         |      |          |                               |
| 1   | V <sub>DD</sub>                           | Power                |         |      |          |                               |
| 2   | GND                                       | Ground               |         |      |          |                               |
| 3   | GND                                       | Ground               |         |      |          |                               |
| 4   | OUT                                       | Output               |         |      |          |                               |
| Maximum Ratings   |   |                      |         |      |          |                               |
| Storage Temperature   | T <sub>STG</sub>                          | -40°C ~ 140 °C       |         |      |          |                               |
| Operating Temperature Range   | T <sub>A</sub>                            | -40°C ~ 125°C        |         |      |          |                               |
| Operating Voltage Range   | V <sub>DD</sub>                           | 1.5 V~ 3.6 V         |         |      |          |                               |
| Typical robustness to electrostatic discharge   |   |                      |         |      |          |                               |
| ESD capability all pins (HBM, JESD22-A114)  |   | V <sub>ESD_HBM</sub> | ± 2 kV  |      |          |                               |
| ESD capability all pins (MM, JESD22-A115)   |   | V <sub>ESD_MM</sub>  | ± 500 V |      |          |                               |
| <b>6</b>  | Acoustical and Electrical Characteristics |                      |         |      |          |                               |
| Unless otherwise noted, typical test conditions are T <sub>A</sub> = 23 °C, V <sub>DD</sub> = 2.0 V and R.H. = 50 % measured in a pressure chamber test setup. All voltages refer to GND node |   |                      |         |      |          |                               |
| Parameter   | Symbol                                    | Values               |         |      | Unit     | Note / Test Condition         |
|   |   | Min.                 | Typ.    | Max. |          |                               |
| Sensitivity 1 kHz   | S <sub>1kHz</sub>                         | -41                  | -38     | -35  | dB(V/Pa) | 1 kHz, 94 dB SPL              |
| Relative Sensitivity 4 kHz  | ⊗S <sub>4kHz</sub>                        | -1                   |         | +4   | dB       | Relative to sensitivity 1 kHz |
| Relative Sensitivity 240 Hz   | ⊗S <sub>240Hz</sub>                       | -1                   |         | +1   | dB       | Relative to sensitivity 1 kHz |
| Acoustic Overload Point   | AOP                                       |                      | 10      |      | %        | 130 dB SPL @1 kHz             |
| Signal-to-Noise Ratio   |   |                      | 62      |      | dB(A)    | 94dB SPL @ 1kHz<br>A-weighted |
| Total Harmonic Distortion   | THD                                       |                      | 1       |      | %        | 94 dB SPL, 1 kHz              |
| Current Consumption   | I <sub>dd</sub>                           |                      | 80      | 120  | u A      | V <sub>DD</sub> = 2.0 V       |
| Power Supply Rejection Ratio  | PSRR                                      |                      | -56     |      | dBr      | F=217Hz 0.1Vpp sine wave      |
| DC Output Voltage   | V <sub>OUT</sub>                          |                      | 0.9     |      | V        | DC Voltage at Pin 4           |
| Output Impedance  | Z <sub>OUT</sub>                          |                      | 150     | 300  | Ω        | 1 kHz                         |
| 1) Psophometrically weighted noise measurement with CCITT-filter (ITU-T Rec. P.53)  |   |                      |         |      |          |                               |
| 2) Noise measurement with A-weighting filter (IEC 651)  |   |                      |         |      |          |                               |


## 7 Schematic Measuring Diagram:

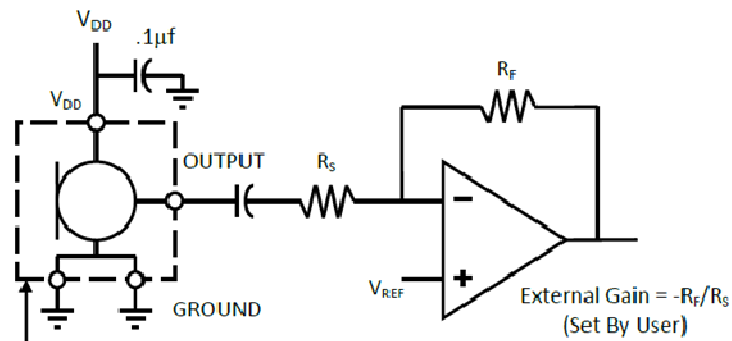

## 8 Typical Measurements Results:

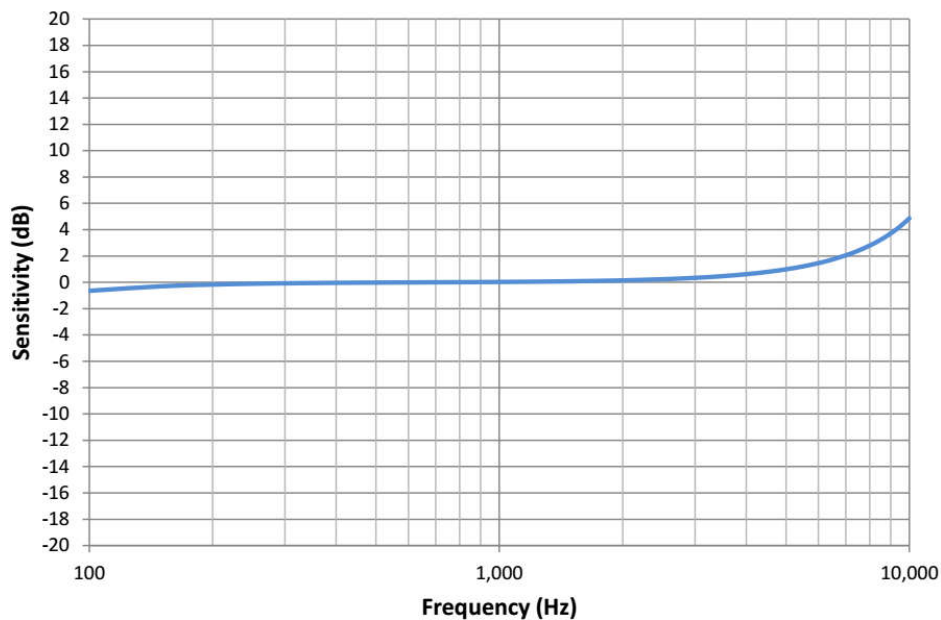


Typical frequency response curve relative to the sensitivity at a frequency of 1 kHz

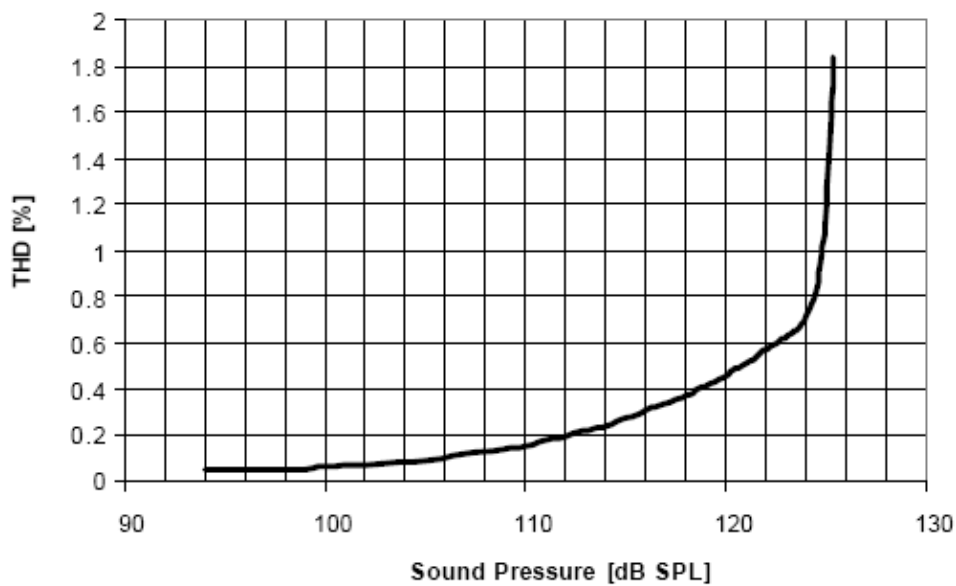


|           |   |   |
|-----------|---|---|
| <b>9</b>  | <b>RELIABILITY SPECIFICATIONS</b>   |   |
|           | Note: After test conditions are performed, the sensitivity of the microphone shall not deviate more than 3dB from its initial value   |   |
|           | Test  | Description   |
|           | Thermal Shock   | Microphone unit must operate when exposed to air-to-air thermal shock 100 cycles, from $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ . (IEC 68-2-4),  |
|           | High Temperature Storage Test   | Microphone unit must maintain sensitivity after storage at $+105^{\circ}\text{C}$ for 1,000 hours. (IEC 68-2-2 Test Ba)   |
|           | Low Temperature Storage Test  | Microphone unit must maintain sensitivity after storage at $-40^{\circ}\text{C}$ for 1,000 hours. (IEC 68-2-1 Test Aa)  |
|           | High Temperature Operating Test   | Microphone unit must operate within sensitivity specifications for 1,000 hours at $105^{\circ}\text{C}$ . (IEC 68-2-2 Test Ba)  |
|           | Low Temperature Operating Test  | Microphone unit must operate within sensitivity specifications for 1,000 hours at $-40^{\circ}\text{C}$ . (IEC 68-2-1 Test Aa)  |
|           | Humidity Test   | Tested under Bias at $85^{\circ}\text{C}/85\%$ R.H. for 1,000 hours. (JESD22-A101A-B)   |
|           | Vibration Test  | Microphone unit must operate under test condition: 4 cycles, from 20 to 2,000 Hz in each direction (x,y,z), 48 minutes, using peak acceleration of 20 G (+20%, -0%). (MIL 883E, method 2007.2, A) |
|           | Electrostatic Discharge   | Tested to 2kV direct contact discharge or 8kV air discharge as specified by IEC 1000-4-2, level 3 and level 4.  |
|           | Reflow  | Microphone is tested to 5 passes through reflow oven, with microphone mounted upside-down under conditions of $260^{\circ}\text{C}$ for 30 seconds maximum.                                       |
|           | Mechanical Shock  | Microphone must operate after exposure to shock test of 10,000 G per IEC 68-2-27, Ea.   |
| <b>10</b> | Notes:  |   |
|           | <ol style="list-style-type: none"> <li>1. Do not pull a vacuum over the port hole of the microphone. Pulling a vacuum over the port hole can damage the device.</li> <li>2. Do not board wash after the reflow process. Board washing and cleaning agents can damage the device. Do not expose to ultrasonic processing or cleaning.</li> <li>3. Number of Reflow = recommend no more than 3 cycles.</li> <li>4. elf life: Twelve (12) months when devices are to be stored in factory supplied, unopened ESD moisture sensitive bag under maximum environmental conditions of <math>30^{\circ}\text{C}</math>, 70% R.H.</li> <li>5. exposure: Devices should not be exposed to high humidity, high temperature environment. MSL (moisture sensitivity level) Class 2A.</li> <li>6. out of bag: Maximum of 90 days out of ESD moisture sensitive bag, assuming maximum conditions of <math>30^{\circ}\text{C}/70\%</math> R.H.</li> </ol> |   |

## 11 Solder Reflow Profile

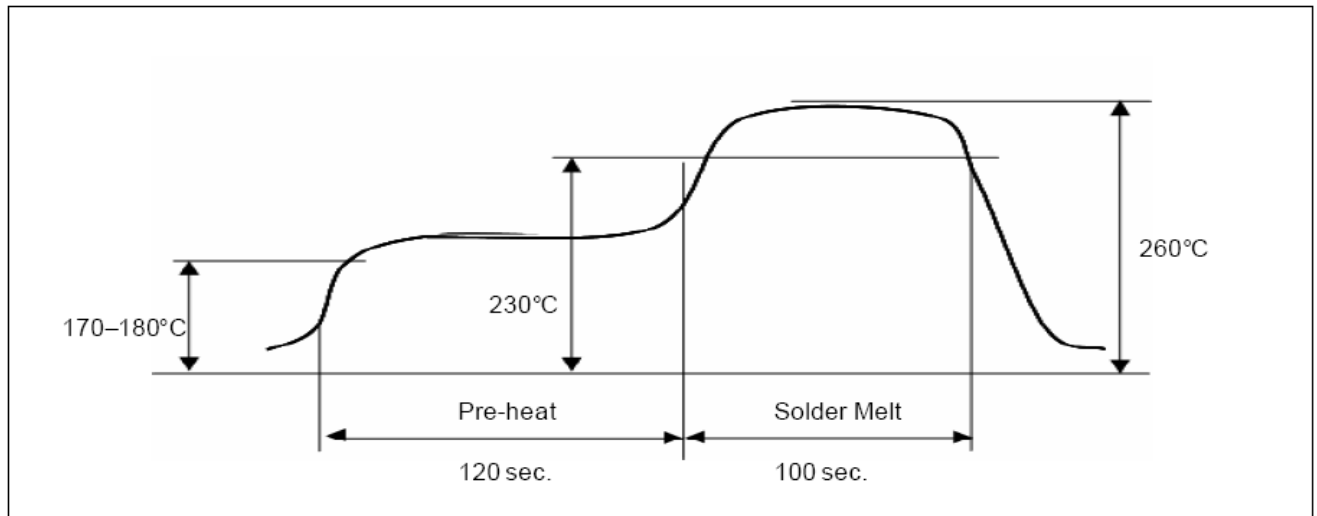

| <i>Stage</i> | <i>Temperature Profile</i> | <i>Time (maximum)</i> |
|--------------|----------------------------|-----------------------|
| Pre-heat     | 170 ~ 180 C                | 120 sec.              |
| Solder Melt  | Above 230 C                | 100 sec.              |
| Peak         | 260 C maximum              | 30 sec.               |

## 12 Package Outline

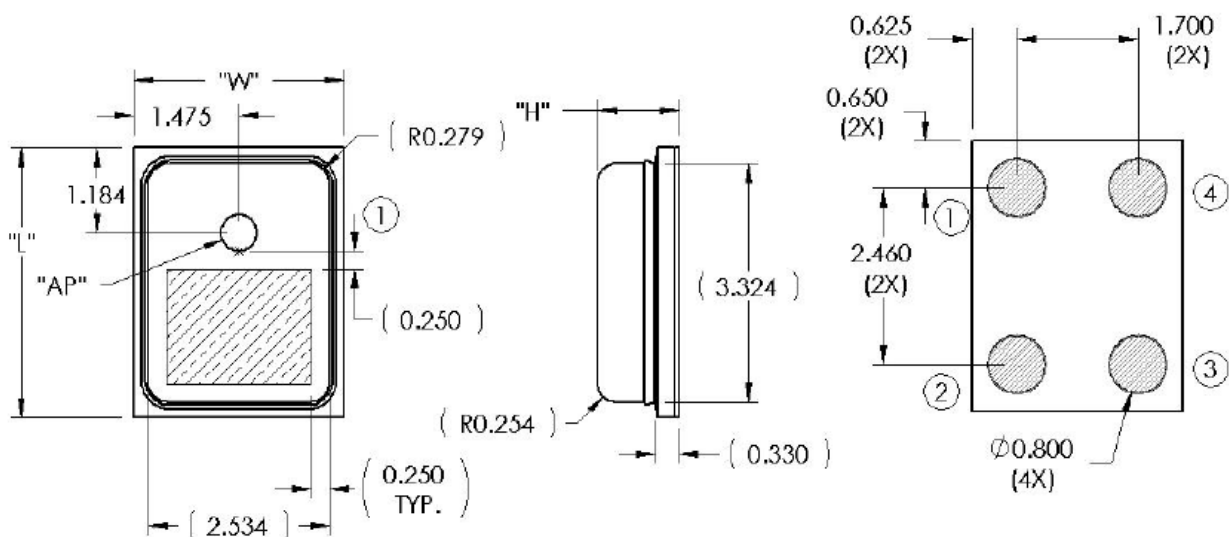


Please don't vacuum over the acoustic port directly. The recommendation is for reference.

| Item               | Dimension | Tolerance |
|--------------------|-----------|-----------|
| Length (L)         | 3.76      | ±0.10     |
| Width (W)          | 2.95      | ±0.10     |
| Height (H)         | 1.10      | ±0.10     |
| Acoustic Port (AP) | Ø0.50     | ±0.05     |

| Pin # | Pin Name        | Type   | Description   |
|-------|-----------------|--------|---------------|
| 1     | V <sub>DD</sub> | Power  | Power Supply  |
| 2     | GROUND          | Power  | Ground        |
| 3     | GROUND          | Power  | Ground        |
| 4     | OUTPUT          | Signal | Output Signal |


Notes: Pick Area only extends to 0.25 mm of any edge or hole unless otherwise specified.




Dimensions are in millimeters unless otherwise specified.

Tolerance is ±0.15mm unless otherwise specified

### 13 Recommended Customer Land Pattern

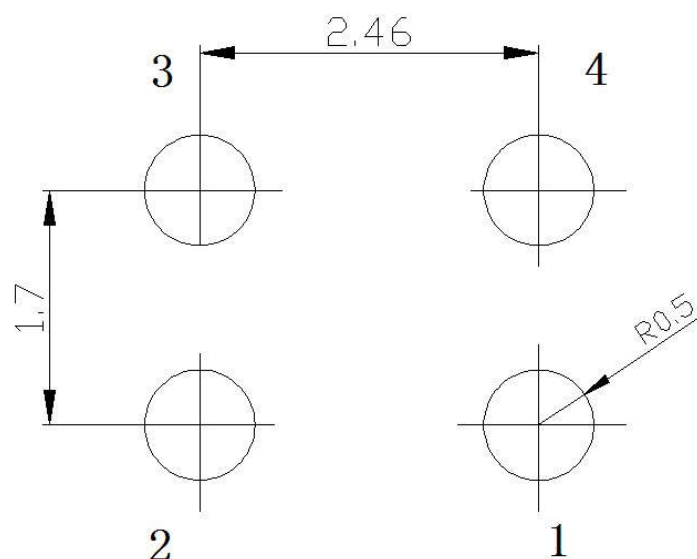


**14 Tape Outline**

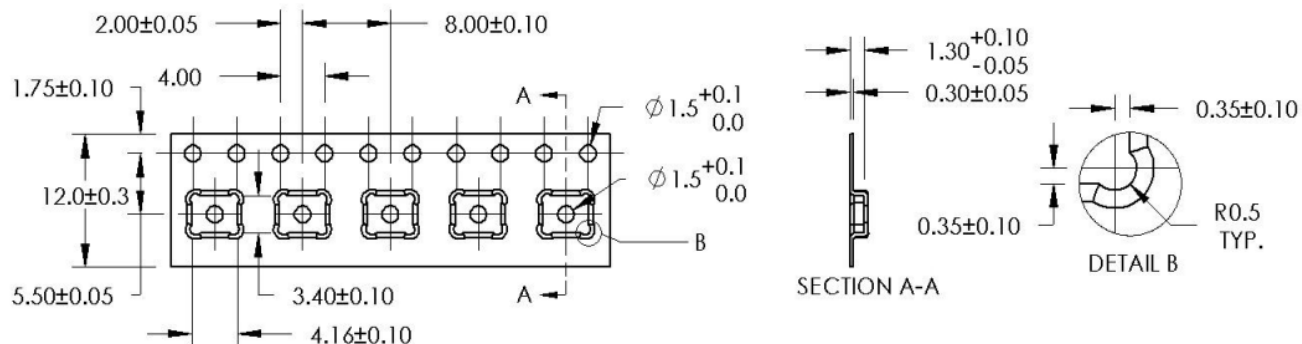

**Notes:** Dimensions are in millimeters unless otherwise specified.  
 Vacuum pickup only in the pick area indicated in Mechanical Specifications.  
 Tape & reel per EIA-481.  
 Labels applied directly to reel and external package.  
 Shelf life: Twelve (12) months when devices are to be stored in factory supplied, unopened ESD moisture sensitive bag under maximum environmental conditions of 30°C, 70% R.H.

**15 Reel Outline**

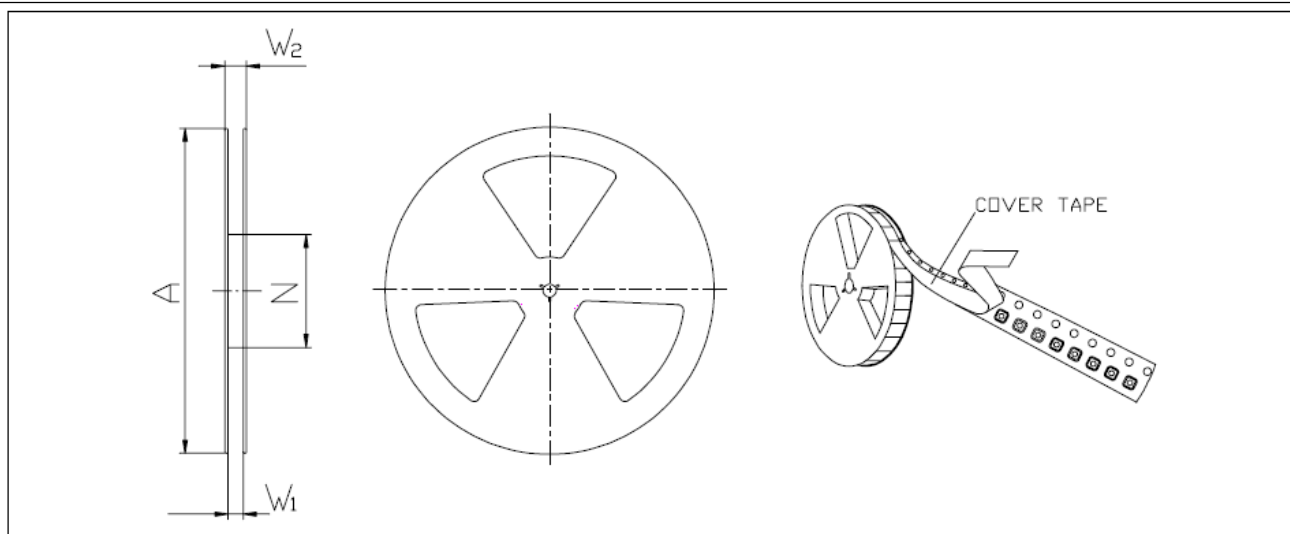

**Reel Dimension (mm) and Quantity per Reel**

| A     | W <sub>1</sub> | W <sub>2</sub> | N     | Quantity per Reel |
|-------|----------------|----------------|-------|-------------------|
| Ø 330 | 12.4±1.5       | 18.4 MAX       | Ø 100 | 5000              |