

**Electret Condenser Microphone (Omnidirectional)**


**Model: CMO9465-4522-423P**




**ELECTRICAL SPECIFICATIONS**

	Condition	Parameter	Unit
Directivity		Omnidirectional	
Sensitivity	0dB = 1V/Pa, 1KHz	-42 ± 3	dB
Operating Voltage		1 ~ 10	Vdc
Standard Operating Voltage		4.5	Vdc
Output Impedance	1KHz, 1Pa	2.2K	Ω
Frequency Range		50 ~ 16K	Hz
Current Consumption	at recommended drive circuit	Max. 500	μA
Sensitivity Reduction	at 3.0Vdc	within -3	dB
S/N Ratio	1KHz, 1Pa, A-weighted	Min. 56	dBA
Terminal		Pin	
Operating Temperature		-20 ~ +70	°C
Storage Temperature		-20 ~ +70	°C

**FREQUENCY RESPONSE CURVE**

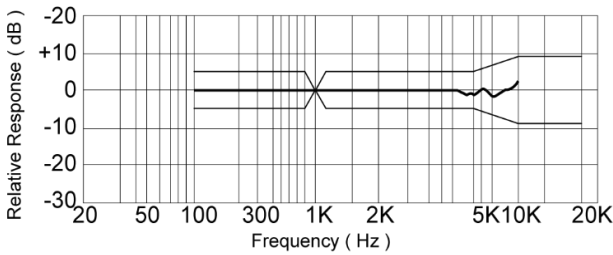

**RECOMMENDED DRIVE CIRCUIT**

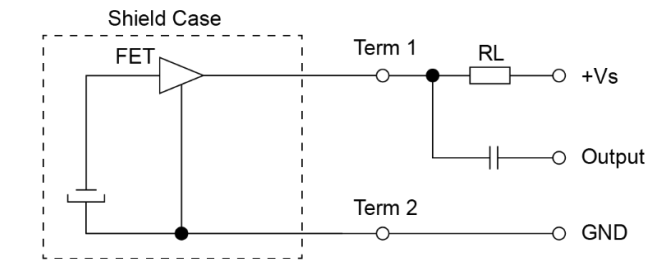

Vs: 4.5Vdc

RL: 2.2KΩ

**MECHANICAL DRAWING**

Dimensions in mm

Tolerance ±0.3mm Except Specified

