

Electret Condenser Microphone (Omnidirectional)


Model: CMOB3015-2022-443W-33




ELECTRICAL SPECIFICATIONS

	Condition	Parameter	Unit
Directivity		Omnidirectional	
Sensitivity	0dB = 1V/Pa, 1KHz	-44 ± 3	dB
Operating Voltage		1 ~ 10	Vdc
Standard Operating Voltage		2	Vdc
Output Impedance	1KHz, 1Pa	2.2K	Ω
Frequency Range		50 ~ 16K	Hz
Current Consumption	at recommended drive circuit	Max. 500	μA
Sensitivity Reduction	at 1.0Vdc	within -3	dB
S/N Ratio	1KHz, 0dB = 1V/Pa, A-weighted	Min. 60	dBA
Terminal		Wire	
Operating Temperature		-20 ~ +70	°C
Storage Temperature		-20 ~ +70	°C

FREQUENCY RESPONSE CURVE

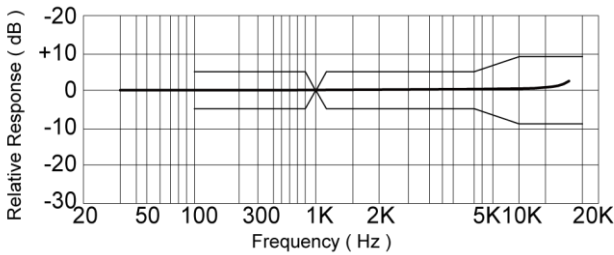

RECOMMENDED DRIVE CIRCUIT

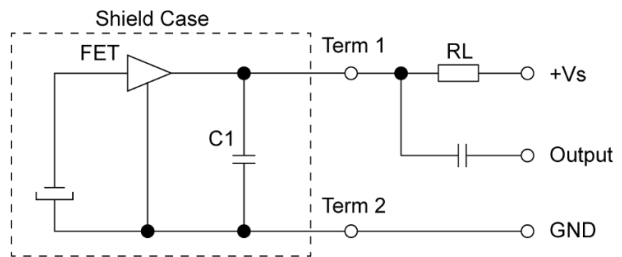

Vs: 2.0Vdc

RL: 2.2KΩ

C1: 33pF

MECHANICAL DRAWING

Dimensions in mm

Wire: 60mm, UL1571 AWG36

Tolerance ±0.3mm Except Specified

