

**Mylar Speaker (External Magnet)**

**Model: ME66TS-28H5.0W4N**




**ELECTRICAL SPECIFICATIONS**

	Condition	Parameter	Unit
Sound Pressure Level	at 0.1W, 0.1M [at 0.6, 0.8, 1.0, 1.2 KHz]	93 ± 3	dB
Impedance	at 1V, 1000Hz	4 ± 15%	Ω
Rated Input Power		5	W
Max Input Power		6	W
Resonant Frequency (Fo)	at 1V	420 ± 20%	Hz
Frequency Range		Fo ~ 4000	Hz
Buzzer & Rattles	not be audible at sine wave between Fo ~ 4KHz	4.47	V
Operating Temperature		-30 ~ 60	°C
Magnet		Ferrite	
Frame Material		Metal	
Cone Material		Mylar (PET)	
Weight		136	g

**MECHANICAL DRAWING**

Dimensions in mm

Tolerance ±0.5mm Except Specified

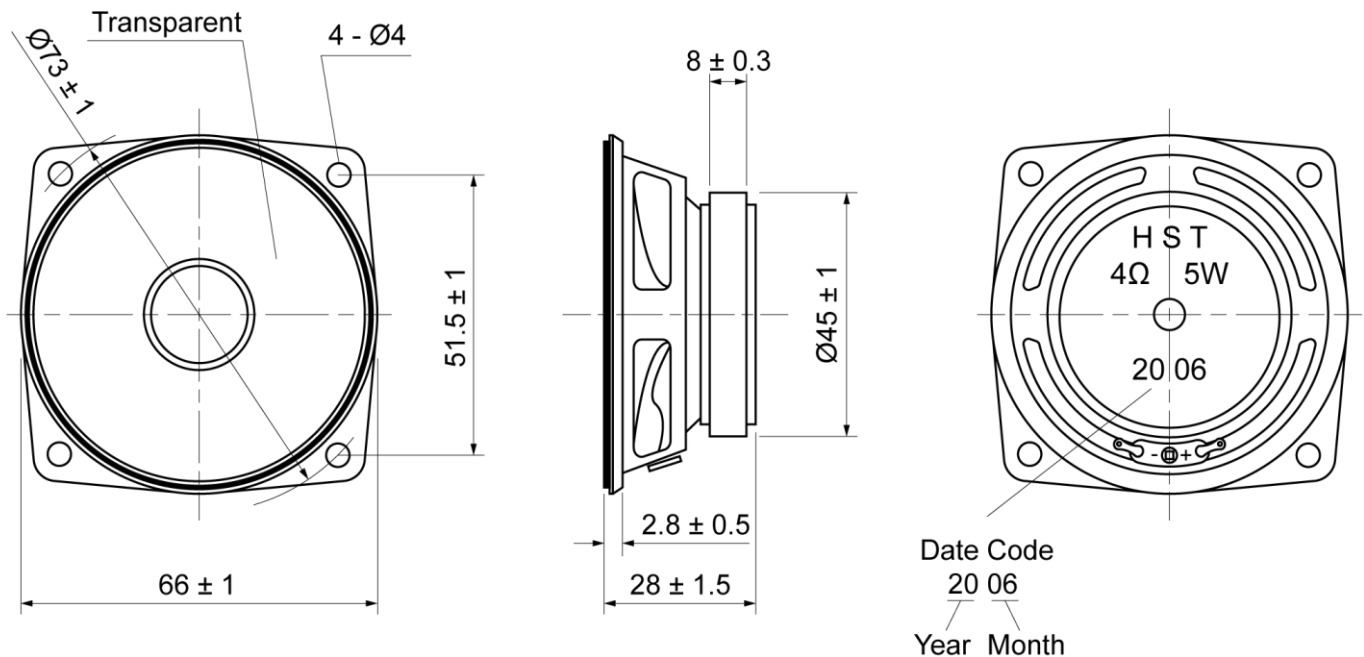

**Mylar Speaker (External Magnet)**

**Model: ME66TS-28H5.0W4N**

**FREQUENCY RESPONSE CURVE**

