

Mylar Speaker (External Magnet)

Model: MEU40R-24H5.0W4




ELECTRICAL SPECIFICATIONS

	Condition	Parameter	Unit
Sound Pressure Level	at 0.1W, 0.1M [at 0.6, 0.8, 1.0, 1.2KHz]	90 ± 3	dB
Impedance	at 1V, 1000Hz	4 ± 15%	Ω
Rated Input Power		5	W
Max Input Power		6	W
Resonant Frequency (Fo)	at 1V	230 ± 20%	Hz
Frequency Range		Fo ~ 20000	Hz
Buzzer & Rattles	not be audible at sine wave between Fo ~ 20KHz	4.47	V
Operating Temperature		-30 ~ 70	°C
Magnet		Ferrite	
Frame Material		Metal	
Cone Material		Mylar	
Weight		85	g

MECHANICAL DRAWING

Dimensions in mm

Tolerance ±0.5mm Except Specified

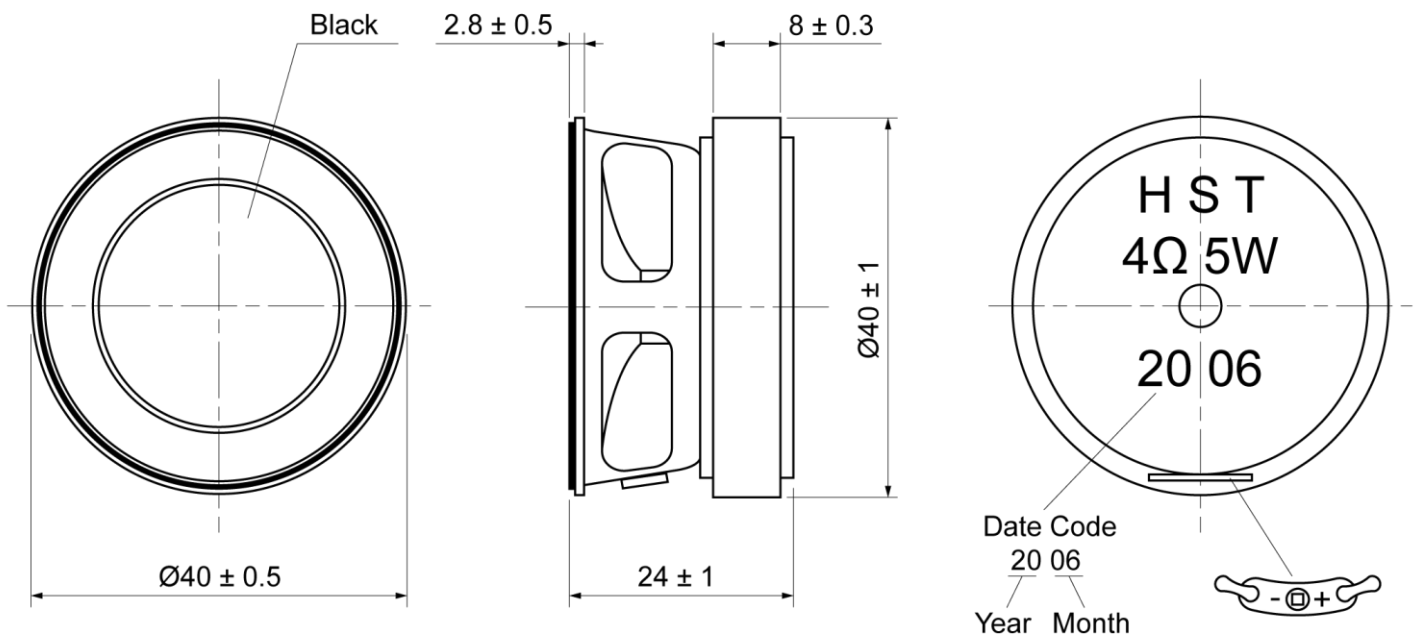

Mylar Speaker (External Magnet)
Model: MEU40R-24H5.0W4

FREQUENCY RESPONSE CURVE

