

**Micro Speaker**

**Model: OSR1313S-4.0A0.7W8A-D**




**ELECTRICAL SPECIFICATIONS**

	Condition	Parameter	Unit
Sound Pressure Level	at 0.7W, 10cm [at 1.0, 1.6, 2.0, 3.2 KHz]	88 ± 3	dB
Impedance	at 1V, 1.5KHz	8 ± 15%	Ω
Rated Input Power		0.7	W
Max Input Power	IEC-60268-5, filter 60s on/120s off, 10 cycles	1	W
Resonant Frequency (Fo)	at 1V	850 ± 20%	Hz
Frequency Range		Fo ~ 20000	Hz
Buzzer & Rattles	not be audible at sine wave between Fo ~ 5KHz	2.37	V
Operating Temperature		-30 ~ 85	°C
Magnet		SmCo	
Frame Material		LCP	
Cone Material		Mylar(PI)	
Weight		1.1	g

**MECHANICAL DRAWING**

Dimensions in mm

Tolerance ±0.5mm Except Specified

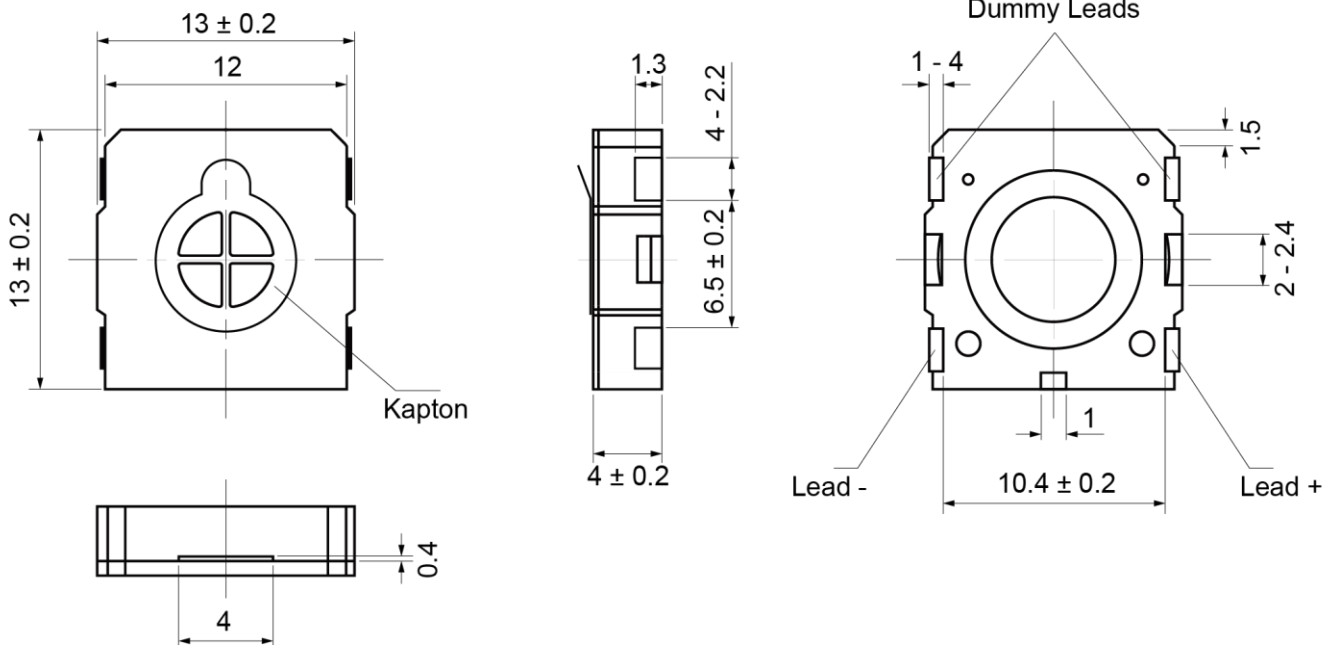

**Micro Speaker**

**Model: OSR1313S-4.0A0.7W8A-D**

**FREQUENCY RESPONSE CURVE**

