


Specifications


Dimensions




Mounting Hole Diameter:  $\Phi 16\text{mm}$   
 Sound Type(□): Continuous Sound(M) / Discontinuous Sound(JM)  
 Supply Voltage(▲): DC12V / DC24V  
 Rated Current:  $\leq 30\text{mA}$   
 Buzzer Volume:  $\geq 85\text{dB}$ (at 0.1m distance) /  $\geq 75\text{dB}$ (at 1m distance)  
 Body Material: Stainless Steel  
 IP Rating: IP40, IK04

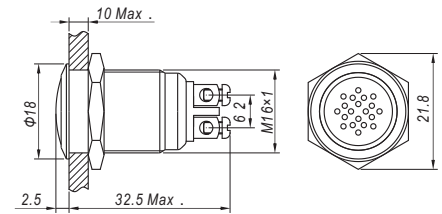


Mounting Hole Diameter:  $\Phi 19\text{mm}$   
 Sound Type(□): Continuous Sound(M) / Discontinuous Sound(JM)  
 Supply Voltage(▲): DC12V / DC24V  
 Rated Current:  $\leq 30\text{mA}$   
 Buzzer Volume:  $\geq 85\text{dB}$ (at 0.1m distance) /  $\geq 75\text{dB}$ (at 1m distance)  
 Body Material: Stainless Steel  
 IP Rating: IP40, IK04

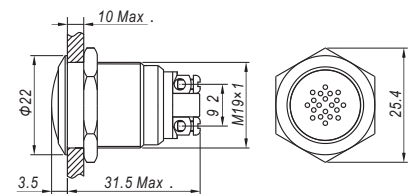

Mounting Hole Diameter:  $\Phi 19\text{mm}$   
 Sound Type: Flashing Buzzer(SM)  
 LED Color(▲): R Other color can be customized  
 Supply Voltage(▲): DC12V / DC24V  
 Rated Current:  $\leq 30\text{mA}$   
 Buzzer Volume:  $\geq 85\text{dB}$ (at 0.1m distance) /  $\geq 75\text{dB}$ (at 1m distance)  
 Body Material: Stainless Steel  
 IP Rating: IP40, IK04

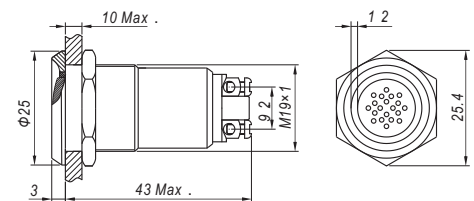

Mounting Hole Diameter:  $\Phi 19\text{mm}$   
 Sound Type(□): Continuous Sound(M) / Discontinuous Sound(JM)  
 Supply Voltage(▲): DC12V / DC24V  
 Rated Current:  $\leq 30\text{mA}$   
 Buzzer Volume:  $\geq 85\text{dB}$ (at 0.1m distance) /  $\geq 75\text{dB}$ (at 1m distance)  
 Body Material: Stainless Steel  
 IP Rating: IP40, IK04

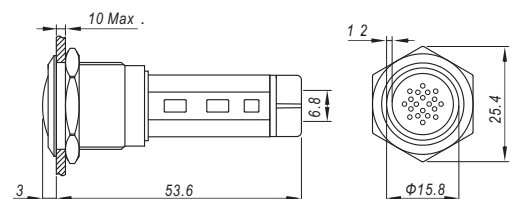

Mounting Hole Diameter:  $\Phi 19\text{mm}$   
 Sound Type: Flashing Buzzer(SM)  
 LED Color(▲): R Other color can be customized  
 Supply Voltage(▲): DC12V / DC24V  
 Rated Current:  $\leq 30\text{mA}$   
 Buzzer Volume:  $\geq 85\text{dB}$ (at 0.1m distance) /  $\geq 75\text{dB}$ (at 1m distance)  
 Body Material: Stainless Steel  
 IP Rating: IP40, IK04

