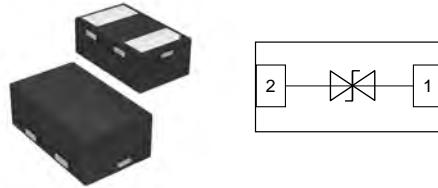


: YUh fYg

- 80Watts peak pulse power ($T_p = 8/20\mu s$)
- DFN1006-2 package
- Bidirectional configurations
- Solid-state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- Medium capacitance ($C_J=15pF$ typ.)
- Protection one data/power line to:
IEC 61000-4-2 $\pm 30kV$ contact $\pm 30kV$ air
IEC 61000-4-4 (EFT) 40A (5/50ns)
IEC 61000-4-5 (Lightning) 8A (8/20 μs)



Mechanical Data

- **Case:** DFN1006-2 (plastic package).
Lead free; RoHS compliant; Halogen free
- **Molding Compound Flammability Rating:**
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:
260 °C/10 sec. at terminals

Applications

- Audio Line, Speaker, Headset,
Microphone Protection
- Human Interface Devices
(Keyboard, Touchpad, Buttons)

5 Vgc`i hYAU ja ia 'FUhb[g

Ratings at 25 °C, ambient temperature unless otherwise specified

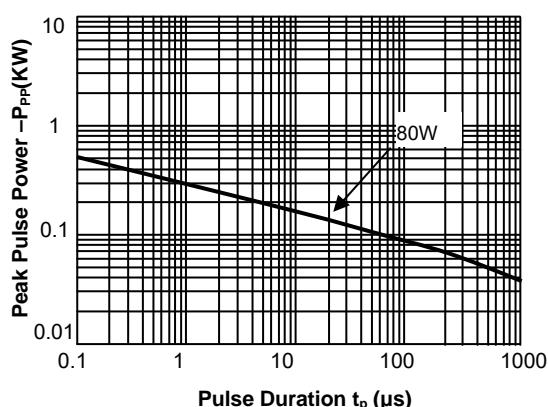
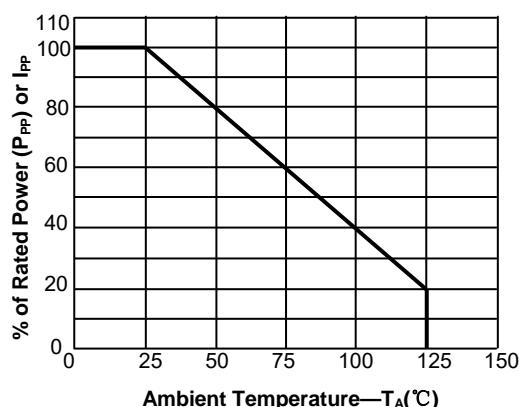
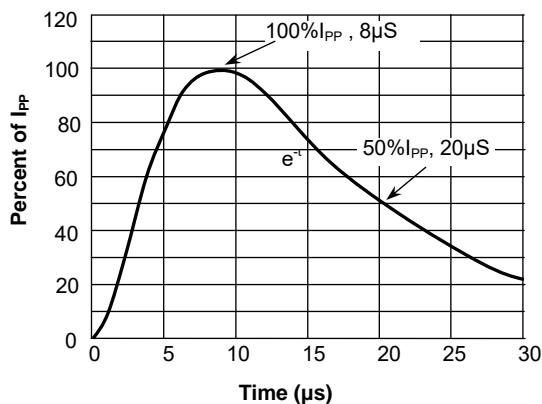
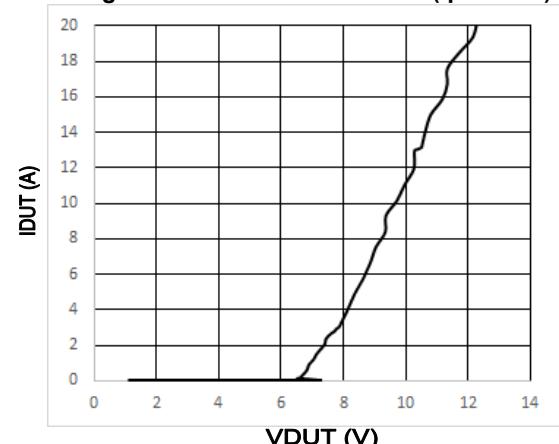
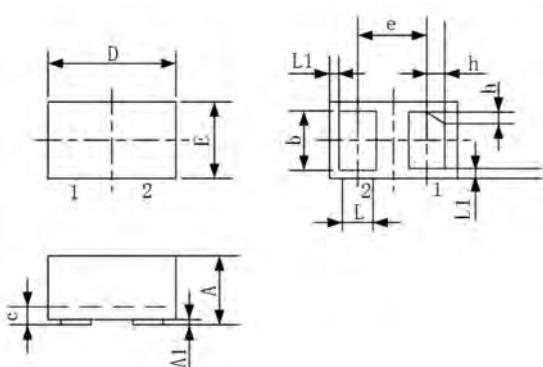
| Parameter | Symbol | Value | Unit |
|---|-----------|-------------|------|
| Peak Pulse Power ($T_p=8/20\mu s$) | P_{PP} | 80 | W |
| ESD contact/air discharge (IEC-61000-4-2) | V_{ESD} | 30/30 | kV |
| Peak Pulse Current ($T_p = 8/20\mu s$) | I_{PP} | 8 | A |
| Junction Temperature | T_J | -55 to +125 | °C |
| Storage temperature | T_{STG} | -55 to +150 | °C |

Electrical Characteristics

($T_A = 25$ °C unless otherwise specified)

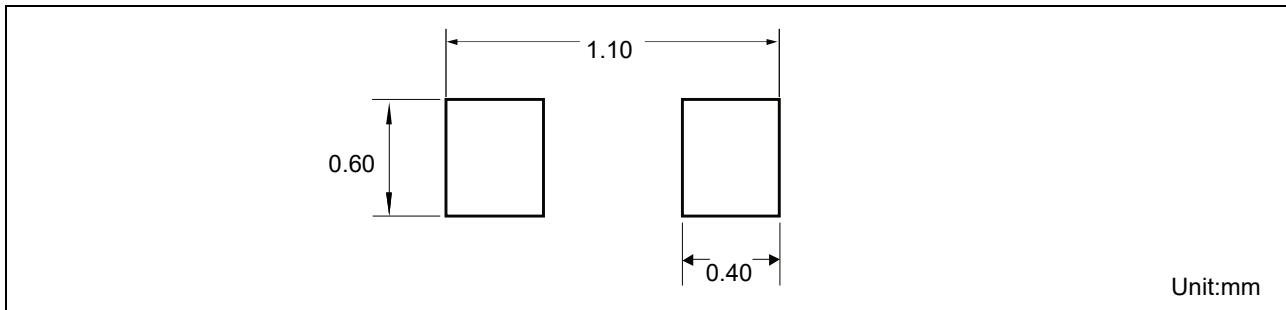
| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|---------------------------|-----------|----------------------------|-----|-------|-----|------|
| Reverse stand-off Voltage | V_{RWM} | | | | 5 | V |
| Reverse Breakdown Voltage | V_{BR} | $I_T=1mA$ | 5.6 | | | V |
| Reverse Leakage Current | I_R | $V_R=5V$ | | 0.01 | 1 | µA |
| Clamping Voltage(SURGE) | V_C | $I_{PP}=6A, T_p=8/20\mu s$ | | | 10 | V |
| Clamping Voltage(ESD) | V_C | $V_{ESD} = +6kV$ | | 8.5 | | V |
| Clamping Voltage(TLP) | V_C | $I_{PP}=8A, T_p=100ns$ | | 9 | | V |
| Clamping Voltage(TLP) | V_C | $I_{PP}=16A, T_p=100ns$ | | 11 | | V |
| Dynamic Resistance | R_{dyn} | | | 0.295 | | Ω |
| Junction Capacitance | C_J | $V_R=0V, f=1MHz$ | | 15 | | pF |

Typical Characteristics ($T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified)

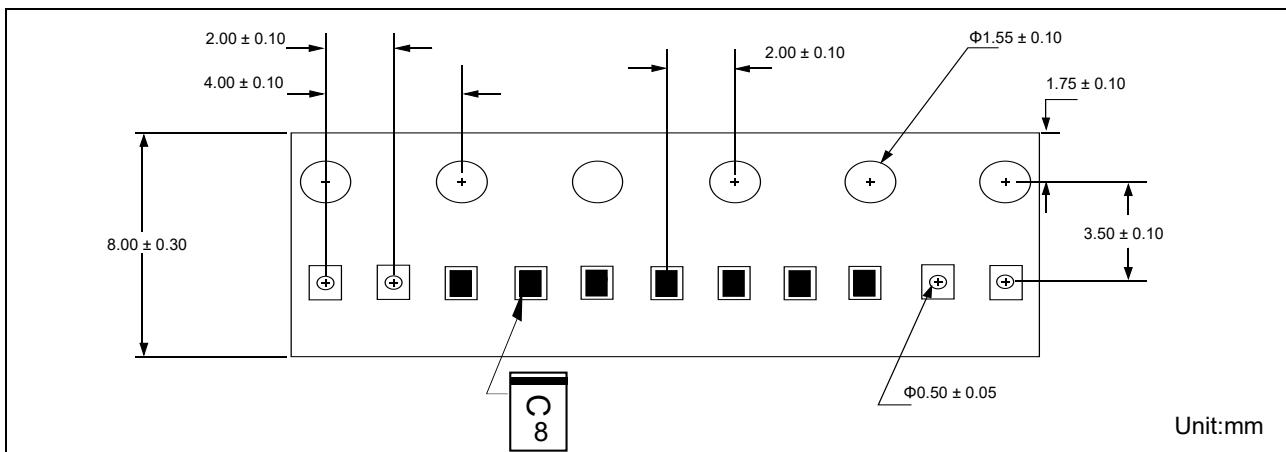
Fig.1 Peak Pulse Power Rating Curve

Fig.2 Pulse Derating Curve

Fig.3 Pulse Waveform-8/20μs

Fig.4 Transmission Line Pulse ($tp=100ns$)

Package Dimensions


| Symbol | Dimensions in millimeters | | |
|--------|---------------------------|------|------|
| | Min | Nom | Max |
| D | 0.95 | 1.00 | 1.05 |
| E | 0.55 | 0.60 | 0.65 |
| b | 0.45 | 0.50 | 0.55 |
| L | 0.20 | 0.25 | 0.30 |
| e | 0.65 BSC | | |
| A | 0.40 | 0.50 | 0.55 |
| A1 | 0 | 0.02 | 0.05 |
| c | 0.12 | 0.15 | 0.18 |
| h | 0.07 | 0.12 | 0.17 |
| L1 | 0.05 REF | | |


Pad Dimensions



Tape and Reel Specification



Marking



X:Month Code

Ordering information

| Order code | Package | Packaging option | Base quantity | Packaging specification |
|---------------|-----------|------------------|-----------------|-------------------------|
| YEDD1020508AG | DFN1006-2 | Tape and reel | 10000pcs / reel | EIA STD RS-481 |