


## Features

- 400Watts peak pulse power ( $T_p = 8/20\mu s$ )
- DFN1006-2 package
- Uni-directional configurations
- Low clamping voltage
- Low leakage current
- Normal capacitance ( $C_J=140\text{pF}$  typ.)
- Protection one data/power line to:  
IEC 61000-4-2  $\pm 30\text{kV}$  contact  $\pm 30\text{kV}$  air  
IEC 61000-4-4 (EFT) 40A (5/50ns)  
IEC 61000-4-5 (Lightning) 28A (8/20 $\mu s$ )



## Mechanical Data

- **Case:** DFN1006-2 (plastic package).  
Lead free; RoHS compliant; Halogen free
- **Molding Compound Flammability Rating:**  
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:  
 $260\text{ }^{\circ}\text{C}/10\text{ sec.}$  at terminals

## Applications

- Microprocessor based equipment
- Personal Digital Assistants (PDAs)
- Notebooks & Handhelds
- Portable Instrumentation
- Digital Cameras
- Portable Instrumentation

## Absolute Maximum Ratings

Ratings at  $25\text{ }^{\circ}\text{C}$ , ambient temperature unless otherwise specified

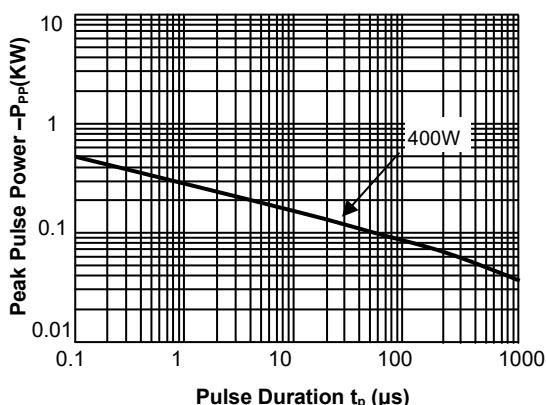
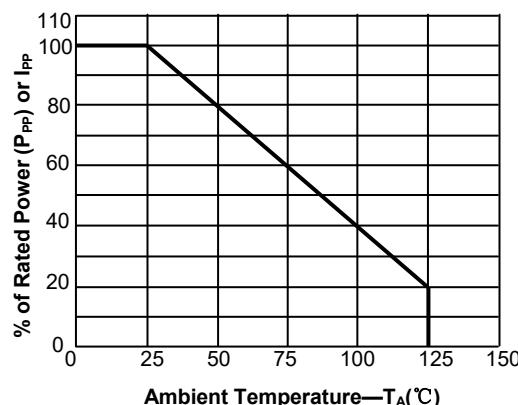
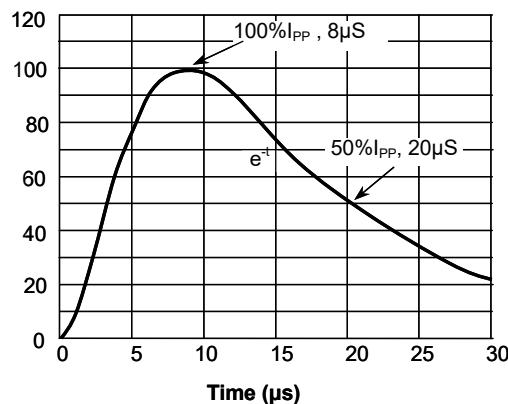
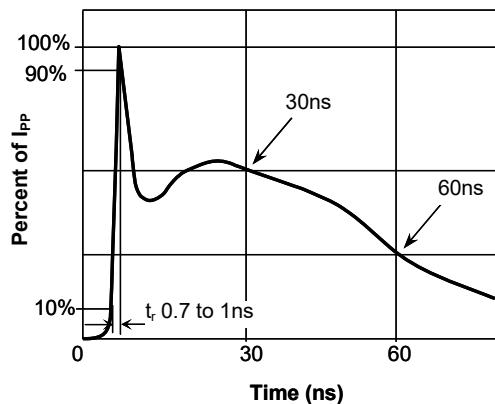
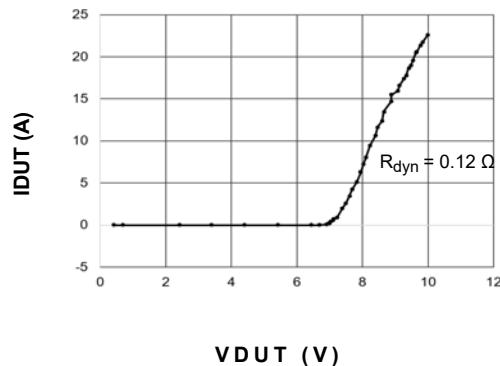
Parameter	Symbol	Value	Unit
Peak Pulse Power ( $T_p=8/20\mu s$ )	$P_{PP}$	400	W
ESD contact/air discharge (IEC-61000-4-2)	$V_{ESD}$	30/30	kV
Peak Pulse Current ( $T_p = 8/20\mu s$ )	$I_{PP}$	28	A
Junction Temperature	$T_J$	-55 to +125	$^{\circ}\text{C}$
Storage temperature	$T_{STG}$	-55 to +150	$^{\circ}\text{C}$

## Electrical Characteristics

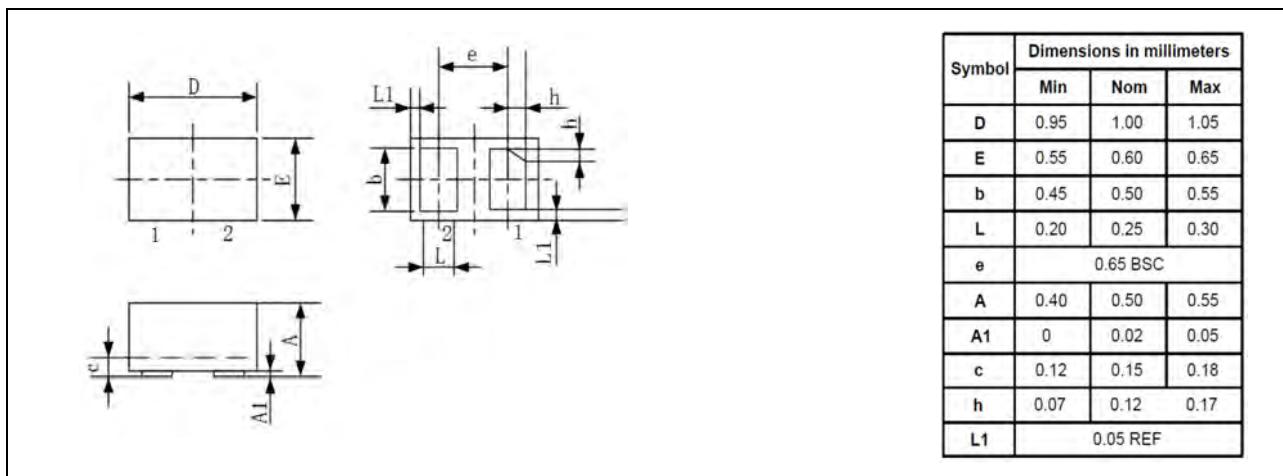
( $T_A = 25\text{ }^{\circ}\text{C}$  unless otherwise specified)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Reverse stand-off Voltage	$V_{RWM}$				7.0	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1\text{mA}$	8.0			V
Reverse Leakage Current	$I_R$	$V_{RWM}=7.0\text{V}$			0.5	$\mu\text{A}$
Clamping Voltage (IEC 61000-4-5)	$V_C$	$I_{PP}=28\text{A}$			15.0	V
Dynamic Resistance	$R_{dyn}$	$T_p=100\text{ns}$		0.12		$\Omega$
Junction Capacitance	$C_J$	$V_R=0\text{V}, f=1\text{MHz}$		140		pF

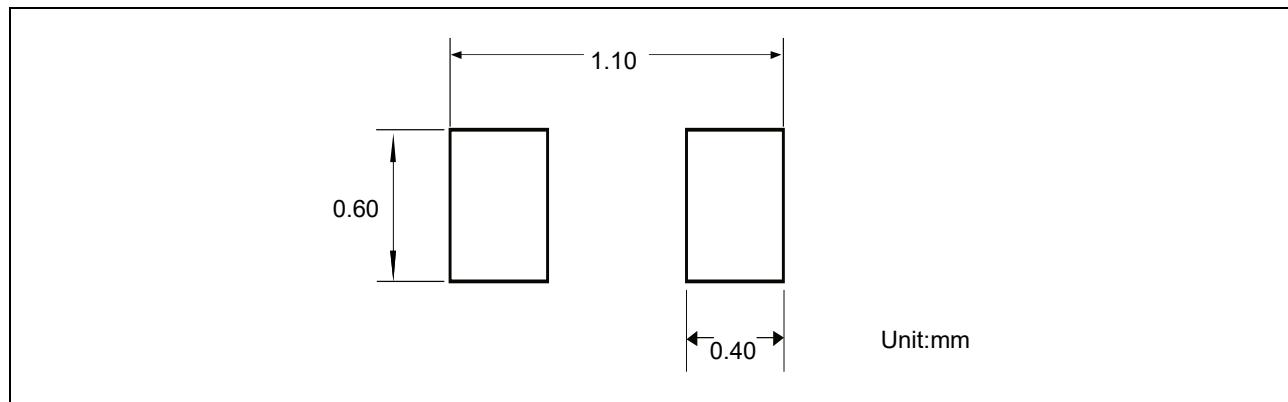
**Typical Characteristics** ( $T_{amb} = 25^{\circ}\text{C}$  unless otherwise specified)

**Fig.1 Peak Pulse Power Rating Curve**

**Fig.2 Pulse Derating Curve**

**Fig.3 Pulse Waveform-8/20μs**

**Fig.4 Pulse Waveform-ESD(IEC61000-4-2)**

**Figure5: Positive Clamping voltage (TLP)**


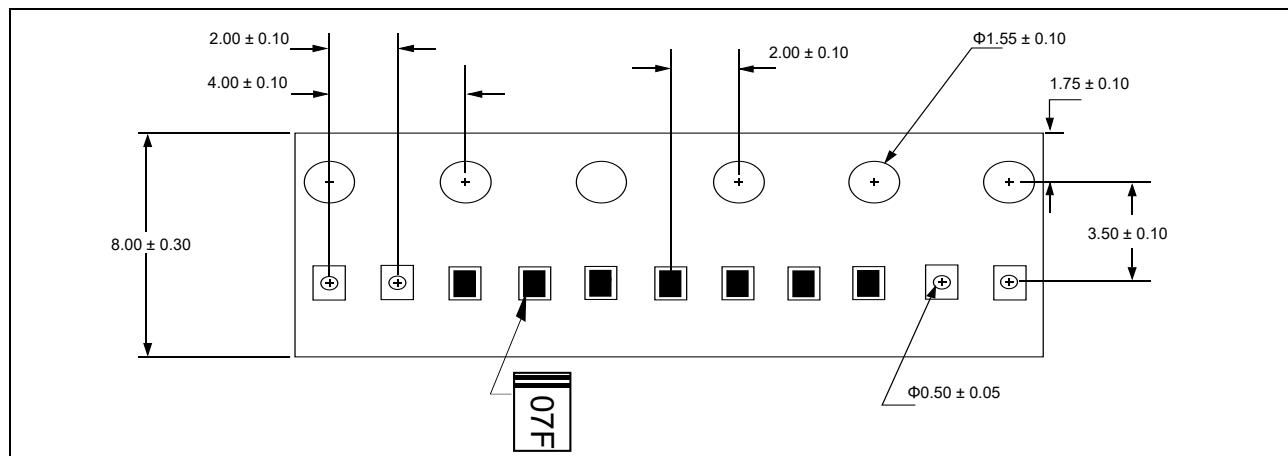
### Package Dimensions



### Pad Dimensions



### Tape and Reel Specification





**YEDD1020728AV**

**ESD Protection Diode**

### **Marking**

|| 07F

### **Ordering information**

Order code	Package	Packaging option	Base quantity	Packaging specification
YEDD1020728AV	DFN1006-2	Tape and reel	10000pcs / reel	EIA STD RS-481