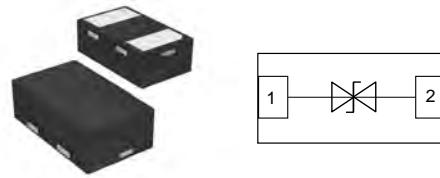


Features

- 60Watts peak pulse power ($T_p = 8/20\mu s$)
- DFN1006-2 package
- Bidirectional configurations
- Low clamping voltage
- Low leakage current
- Solid-state silicon-avalanche technology
- Protection one data/power line to:
IEC 61000-4-2 $\pm 25kV$ contact $\pm 25kV$ air
IEC 61000-4-4 (EFT) 40A (5/50ns)
IEC 61000-4-5 (Lightning) 8A (8/20 μs)



Mechanical Data

- **Case:** DFN1006-2 (plastic package).
Lead free; RoHS compliant; Halogen free
- **Molding Compound Flammability Rating:**
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:
260 °C/10 sec. at terminals

Applications

- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation

Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified

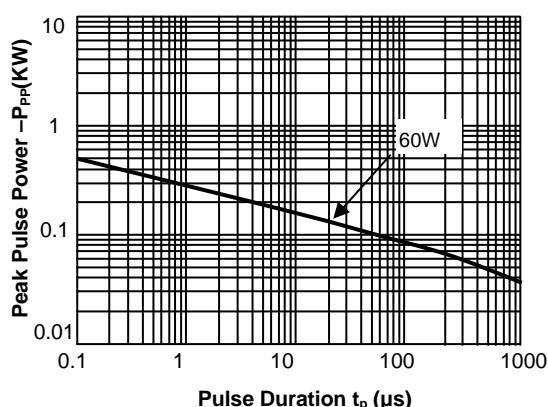
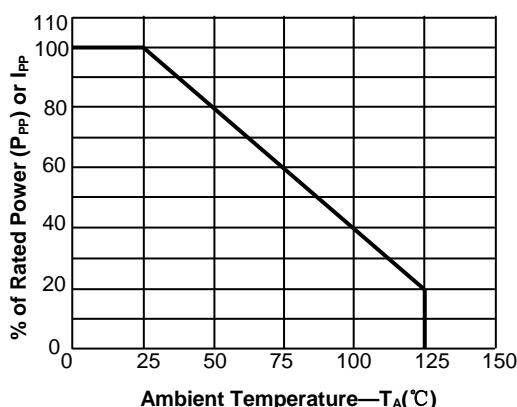
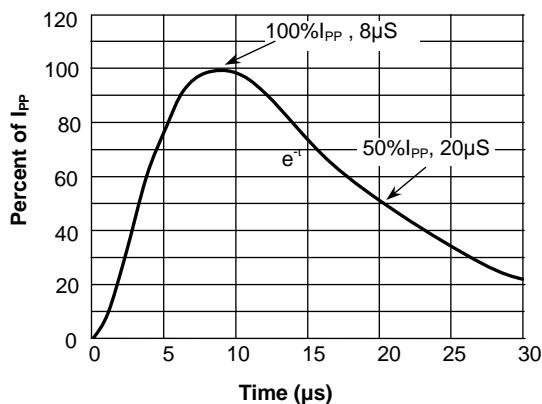
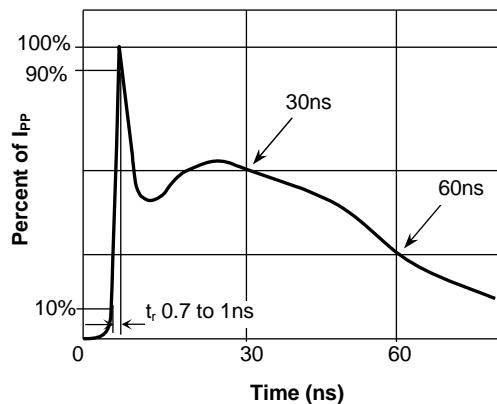
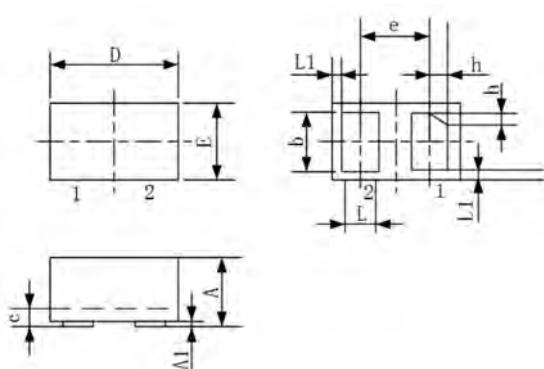
Parameter	Symbol	Value	Unit
Peak Pulse Power ($T_p=8/20\mu s$)	P_{PP}	60	W
ESD contact/air discharge (IEC-61000-4-2)	V_{ESD}	25/25	kV
Peak Pulse Current ($T_p = 8/20\mu s$)	I_{PP}	8	A
Junction Temperature	T_J	-55 to +125	°C
Storage temperature	T_{STG}	-55 to +150	°C

Electrical Characteristics

($T_A = 25$ °C unless otherwise specified)

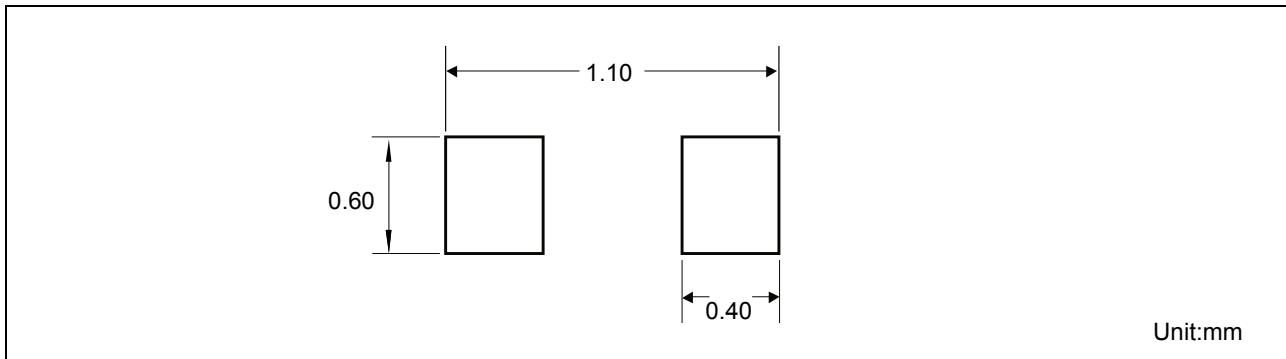
Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Stand-Off Voltage	V_{RWM}				2.5	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	3.3			V
Reverse Leakage Current	I_R	$V_{RWM}=2.5V, T=25^\circ C$			0.5	µA
Clamping Voltage	V_{CL}	$I_{PP}=16A, t_p=100ns$		8		V
Clamping Voltage	V_C	$I_{PP}=1A, t_p=8/20\mu s$			5	V
Clamping Voltage		$I_{PP}=8A, t_p=8/20\mu s$			8	V
Dynamic resistance	R_{DYN}			0.2		Ω
Junction Capacitance	C_j	$V_R = 0V, f = 1MHz$		15		pF

Typical Characteristics ($T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified)

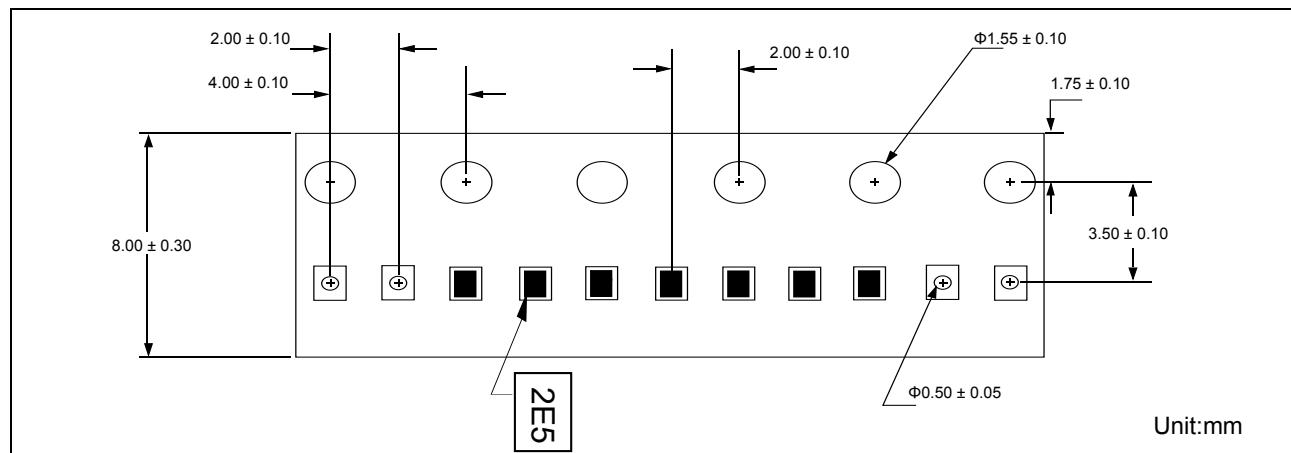
Fig.1 Peak Pulse Power Rating Curve

Fig.2 Pulse Derating Curve

Fig.3 Pulse Waveform-8/20μs

Fig.4 Pulse Waveform-ESD(IEC61000-4-2)

Package Dimensions


Symbol	Dimensions in millimeters		
	Min	Nom	Max
D	0.95	1.00	1.05
E	0.55	0.60	0.65
b	0.45	0.50	0.55
L	0.20	0.25	0.30
e	0.65 BSC		
A	0.40	0.50	0.55
A1	0	0.02	0.05
c	0.12	0.15	0.18
h	0.07	0.12	0.17
L1	0.05 REF		

Pad Dimensions



Tape and Reel Specification



Marking

2E5

Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
YEDD1022R08AG	DFN1006-2	Tape and reel	10000pcs / reel	EIA STD RS-481