


Features

- 80Watts peak pulse power ($T_P = 8/20\mu s$)
- DFN1006-2 package
- Bidirectional configurations
- Low clamping voltage
- Low leakage current
- Solid-state silicon-avalanche technology
- Protection one data/power line to:
 - IEC 61000-4-2 $\pm 30kV$ contact $\pm 30kV$ air
 - IEC 61000-4-4 (EFT) 40A (5/50ns)
 - IEC 61000-4-5 (Lightning) 11A (8/20 μs)

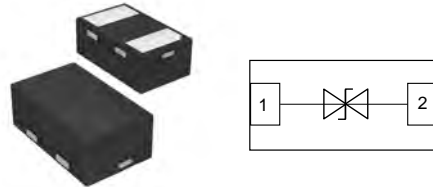

Mechanical Data

- **Case:** DFN1006-2 (plastic package).
Lead free; RoHS compliant; Halogen free
- **Molding Compound Flammability Rating:**
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:
260 °C/10 sec. at terminals

Applications

- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation

Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified


| Parameter | Symbol | Value | Unit |
|---|-----------|-------------|------|
| Peak Pulse Power ($T_P=8/20\mu s$) | P_{PP} | 80 | W |
| ESD contact/air discharge (IEC-61000-4-2) | V_{ESD} | 30/30 | kV |
| Peak Pulse Current ($T_P = 8/20\mu s$) | I_{PP} | 11 | A |
| Junction Temperature | T_J | -55 to +125 | °C |
| Storage temperature | T_{STG} | -55 to +125 | °C |

Electrical Characteristics


($T_A = 25\text{ °C}$ unless otherwise specified)

| Parameter | Symbol | Conditions | Min | Typ | Max | Unit |
|---------------------------|-----------|--------------------------------|-----|-----|-----|----------|
| Reverse Stand-Off Voltage | V_{RWM} | | | | 4.5 | V |
| Reverse Breakdown Voltage | V_{BR} | $I_T=1mA$ | 4.6 | | | V |
| Reverse Leakage Current | I_R | $V_{RWM}=4.5V, T=25\text{ °C}$ | | 0.1 | 0.2 | μA |
| Clamping Voltage | V_{CL} | $I_{PP}=16A, t_p=100ns$ | | 8 | | V |
| Clamping Voltage | V_C | $I_{PP}=5A, t_p=8/20\mu s$ | | | 6 | V |
| Clamping Voltage | | $I_{PP}=11A, t_p=8/20\mu s$ | | 8 | | V |
| Dynamic resistance | R_{DYN} | | | 0.2 | | Ω |
| Junction Capacitance | C_j | $V_R = 0V, f = 1MHz$ | | 18 | | pF |


Typical Characteristics ($T_{amb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

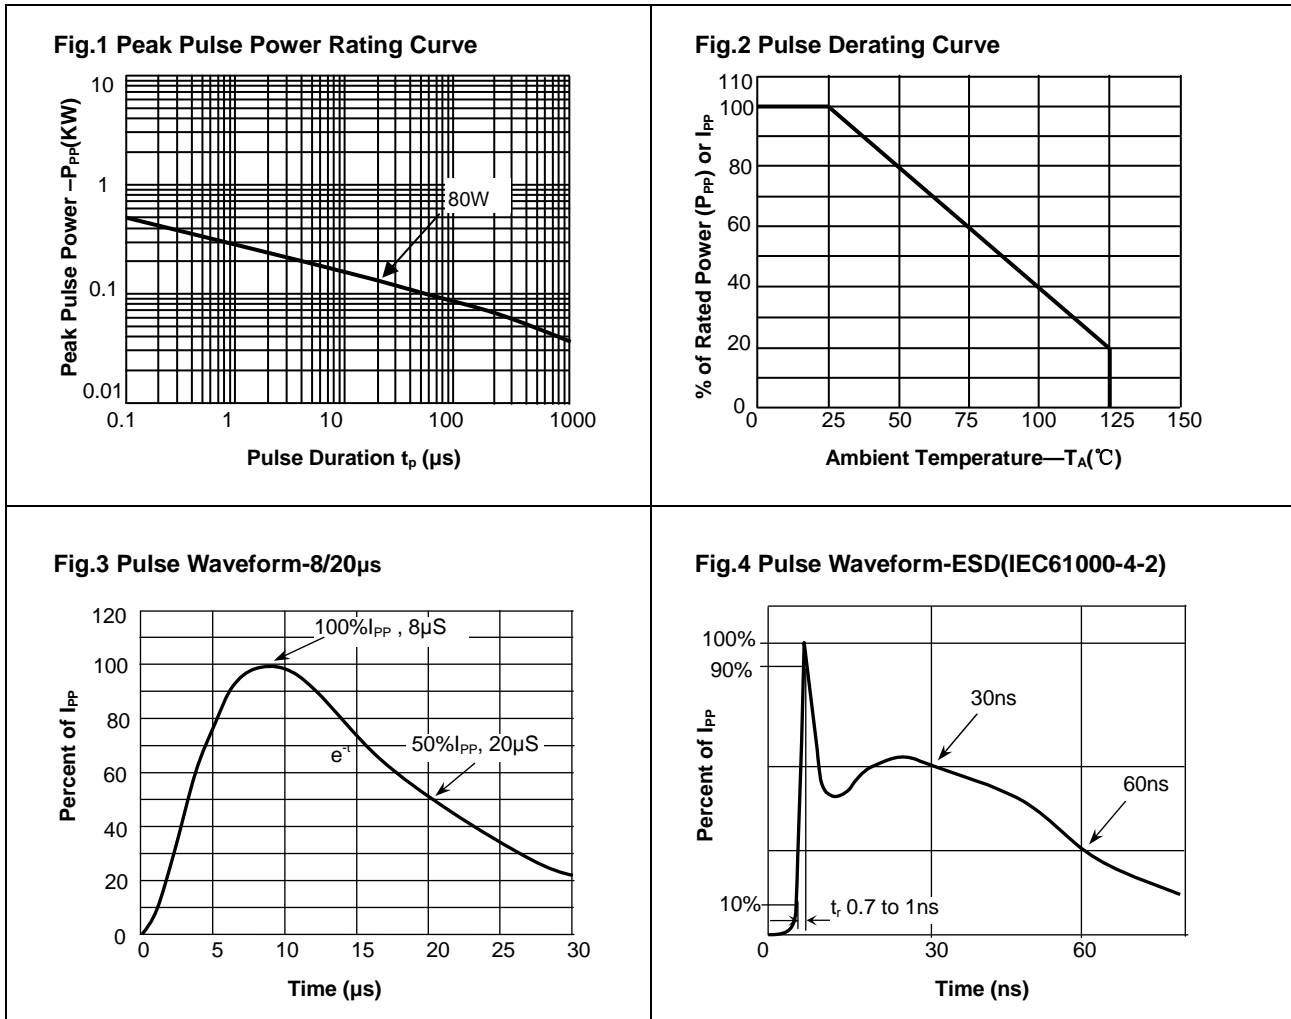


Package Dimensions

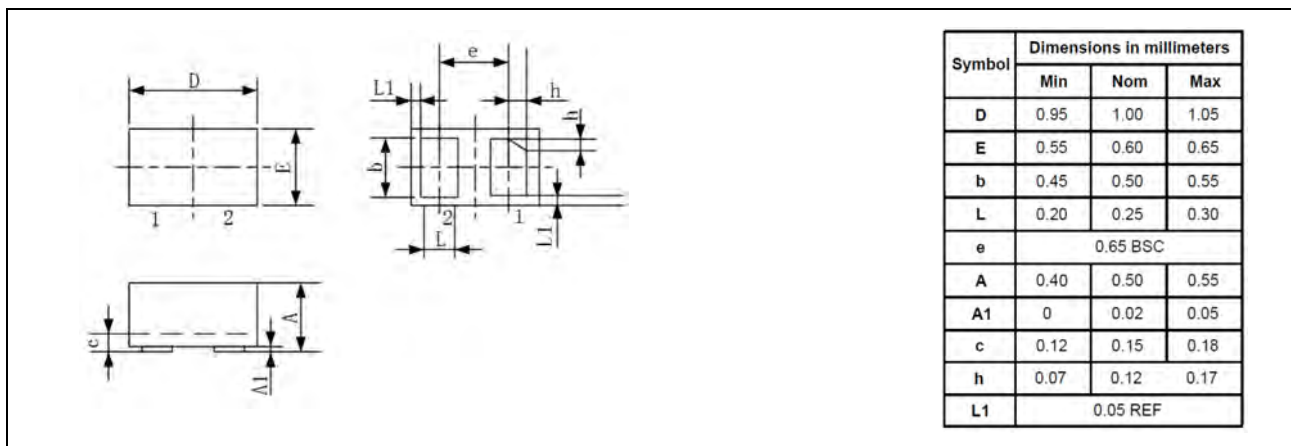

Pad Dimensions

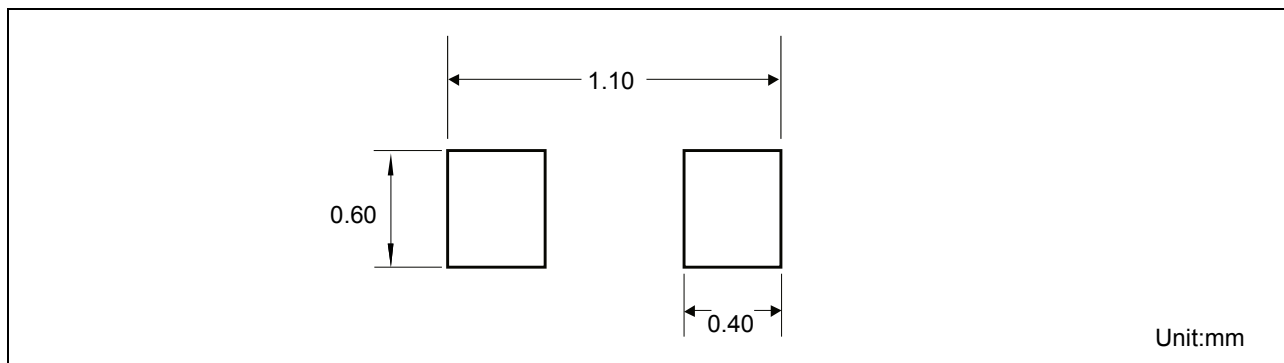

Tape and Reel Specification

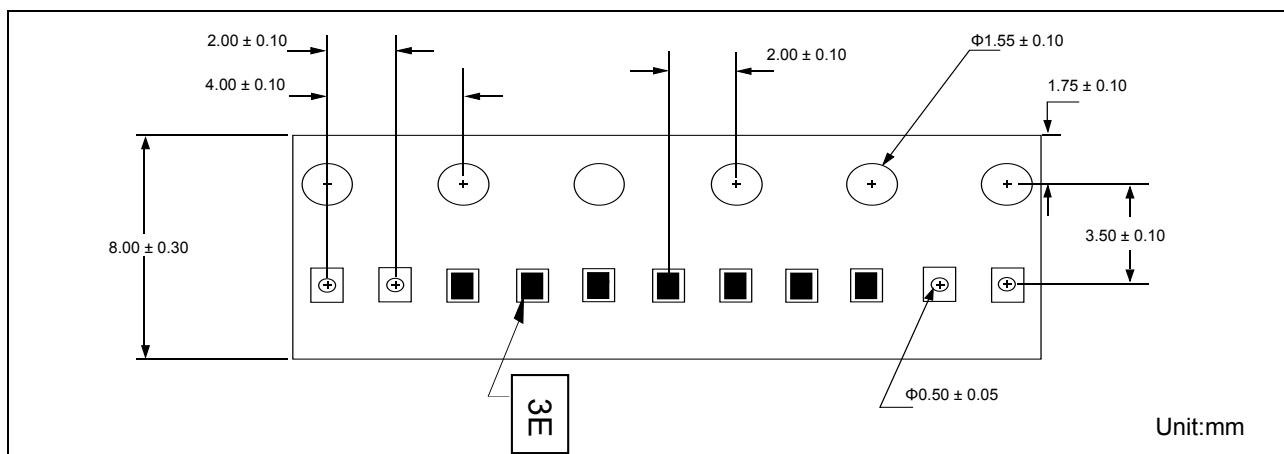

Marking



Ordering information

| Order code | Package | Packaging option | Base quantity | Packaging specification |
|---------------|-----------|------------------|-----------------|-------------------------|
| YEDD1024R11AG | DFN1006-2 | Tape and reel | 10000pcs / reel | EIA STD RS-481 |