


### Features

- 350Watts peak pulse power ( $T_p = 8/20\mu s$ )
- SOD-323 package
- Unidirectional configurations
- Low clamping voltage
- Low leakage current
- Solid-state silicon-avalanche technology
- Protection one data/power line to:
  - IEC 61000-4-2  $\pm 30kV$  contact  $\pm 30kV$  air
  - IEC 61000-4-4 (EFT) 40A (5/50ns)
  - IEC 61000-4-5 (Lightning) 10A (8/20  $\mu s$ )

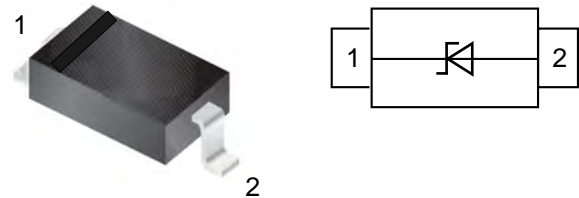

### Mechanical Data

- **Case:** SOD-323 (plastic package).  
Lead free; RoHS compliant; Halogen free
- **Molding Compound Flammability Rating:**  
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:  
260 °C/10 sec. at terminals

### Applications

- Microprocessor based equipment
- Notebooks, Desktops, and Servers
- Security
- Power Line
- Power management

### Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified


| Parameter                                 | Symbol    | Value       | Unit |
|-------------------------------------------|-----------|-------------|------|
| Peak Pulse Power ( $T_p=8/20\mu s$ )      | $P_{PP}$  | 350         | W    |
| ESD contact/air discharge (IEC-61000-4-2) | $V_{ESD}$ | 30/30       | kV   |
| Peak Pulse Current ( $T_p = 8/20\mu s$ )  | $I_{PP}$  | 10          | A    |
| Junction Temperature                      | $T_J$     | -55 to +150 | °C   |
| Storage temperature                       | $T_{STG}$ | -55 to +150 | °C   |

### Electrical Characteristics


( $T_A = 25\text{ °C}$  unless otherwise specified)

| Parameter                        | Symbol    | Condition        | Min  | Typ | Max | Unit    |
|----------------------------------|-----------|------------------|------|-----|-----|---------|
| Reverse stand-off Voltage        | $V_{RWM}$ |                  |      |     | 15  | V       |
| Reverse Breakdown Voltage        | $V_{BR}$  | $I_T=1mA$        | 16.7 |     |     | V       |
| Reverse Leakage Current          | $I_R$     | $V_R=15V$        |      |     | 0.5 | $\mu A$ |
| Clamping Voltage (IEC 61000-4-5) | $V_C$     | $I_{PP}=10A$     |      | 35  |     | V       |
| Junction Capacitance             | $C_J$     | $V_R=0V, f=1MHz$ |      | 45  |     | pF      |


**Typical Characteristics** ( $T_{amb} = 25\text{ }^{\circ}\text{C}$  unless otherwise specified)

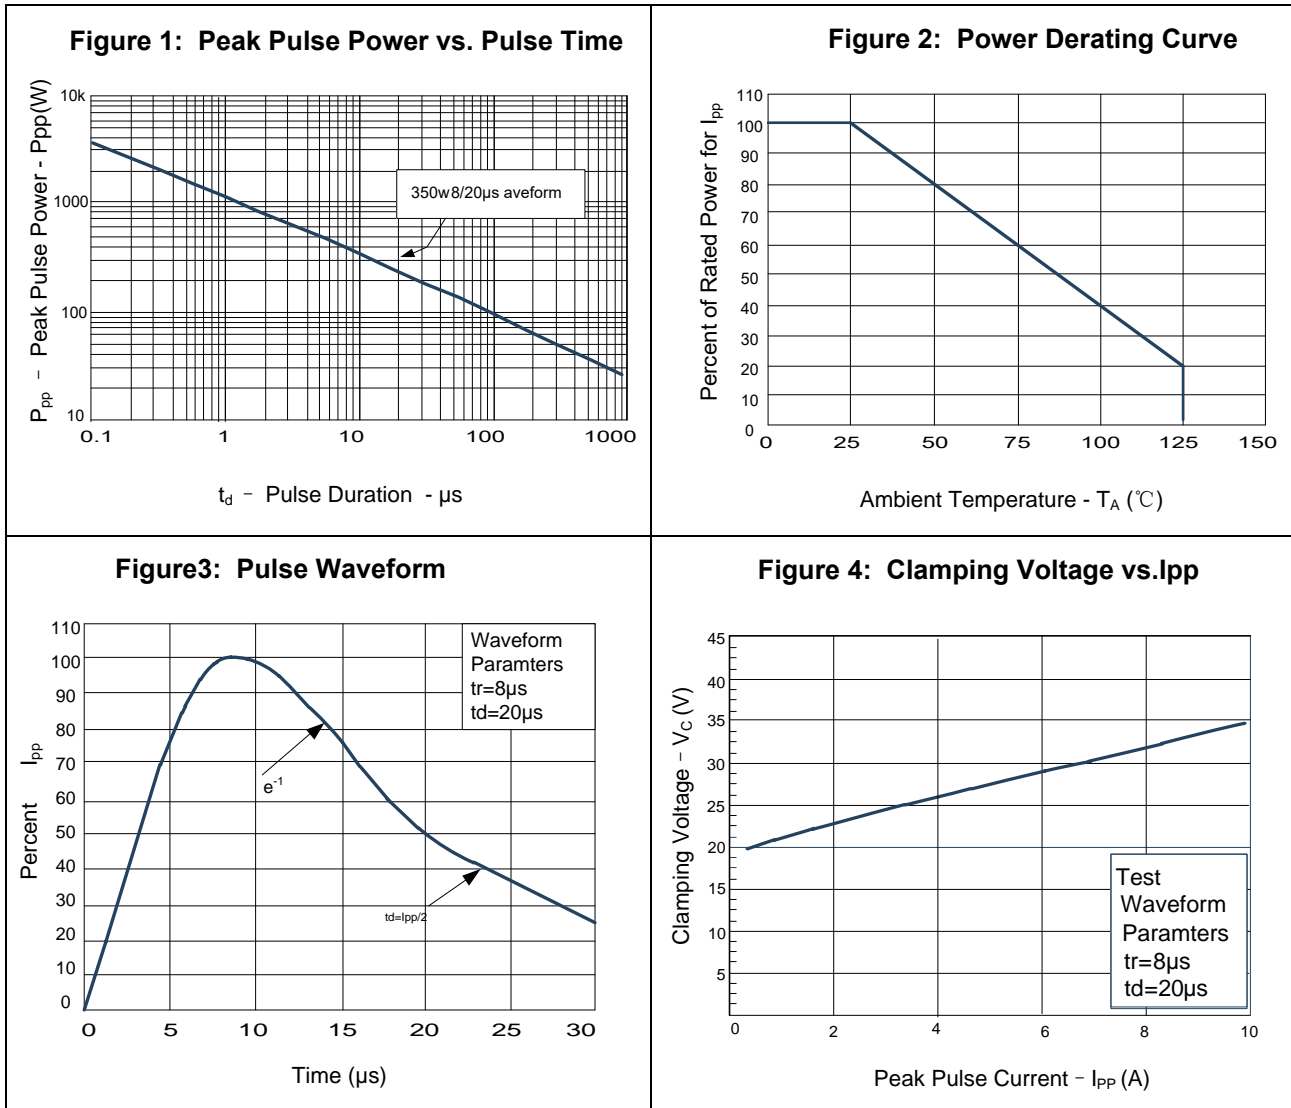


**Package Dimensions**

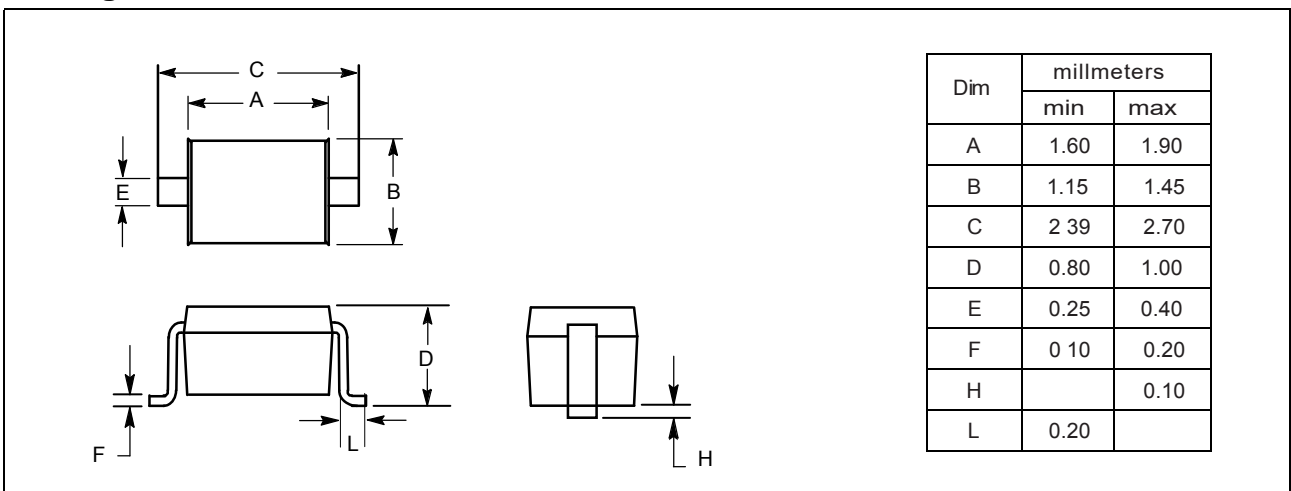

### PAD Dimension

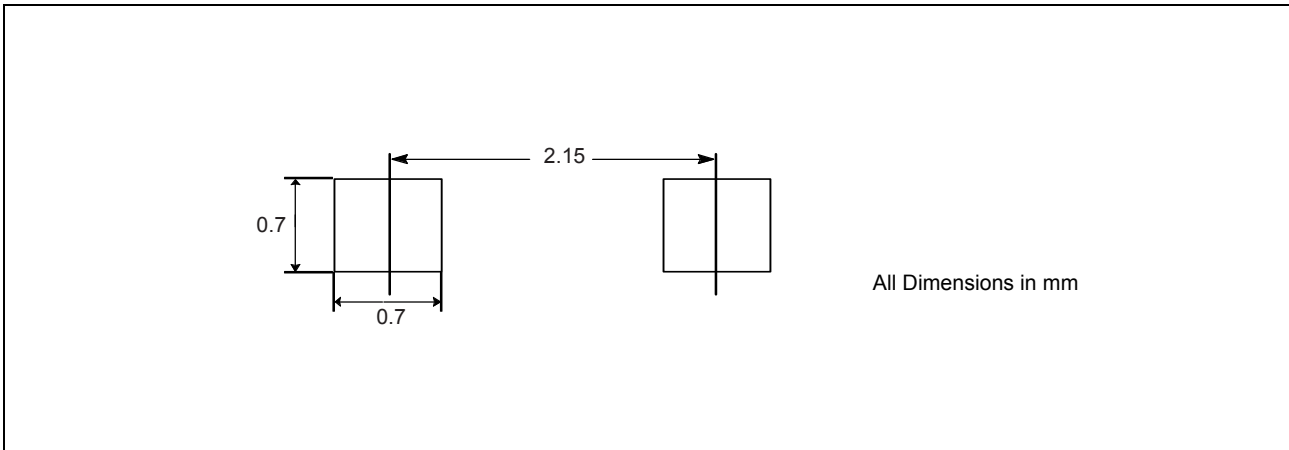

### Package Information

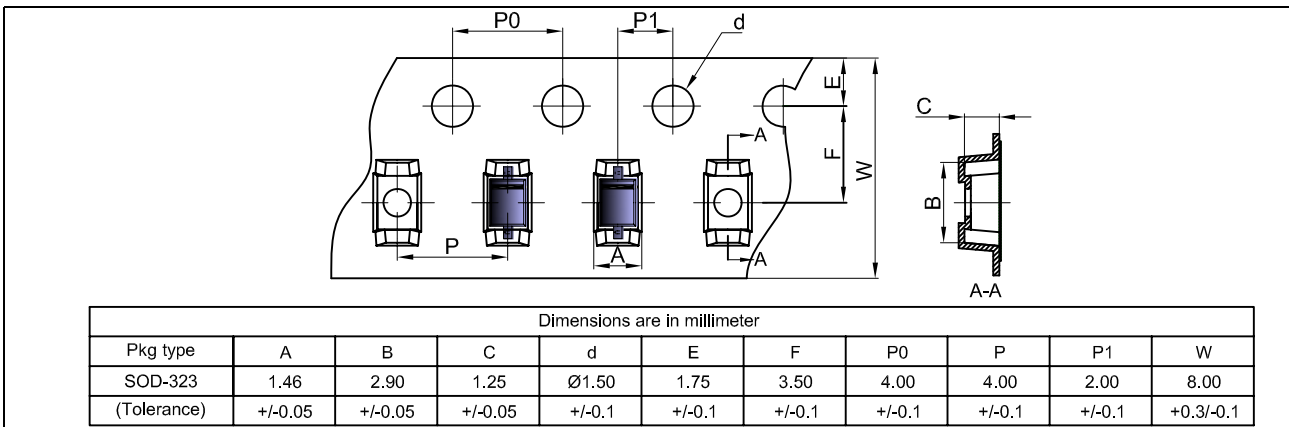

### Marking



### Ordering information

| Order code    | Package | Packaging option | Base quantity  | Packaging specification |
|---------------|---------|------------------|----------------|-------------------------|
| YEDSD321510AV | SOD-323 | Tape and reel    | 3000pcs / reel | EIA STD RS-481          |