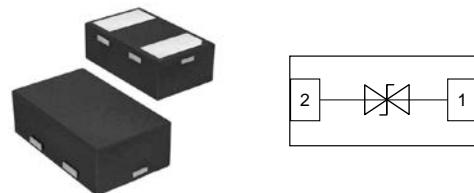


Features

- 40Watts peak pulse power ($t_p = 8/20\mu s$)
- DFN1006-2 package
- Bidirectional configurations
- SCR technology
- Low clamping voltage
- Low leakage current
- Low capacitance ($C_j=3pF$ typ.)
- Protection one data/power line to:
IEC 61000-4-2 $\pm 20kV$ contact $\pm 20kV$ air
IEC 61000-4-4 (EFT) 40A (5/50ns)
IEC 61000-4-5 (Lightning) 3A (8/20 μs)



Mechanical Data

- **Case:** DFN1006-2 (plastic package).
Lead free; RoHS compliant; Halogen free
- **Molding Compound Flammability Rating:**
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:
260 °C/10 sec. at terminals

Applications

- Audio Line, Speaker, Headset, Microphone Protection
- Human Interface Devices (Keyboard, Touchpad, Buttons)
- USB2.0 Protection

Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified

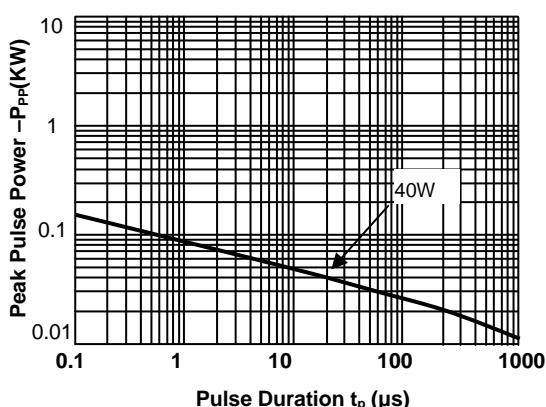
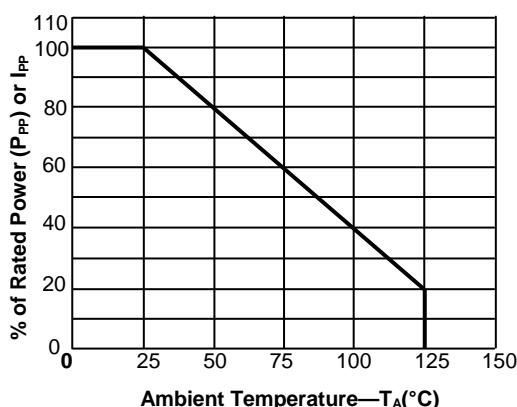
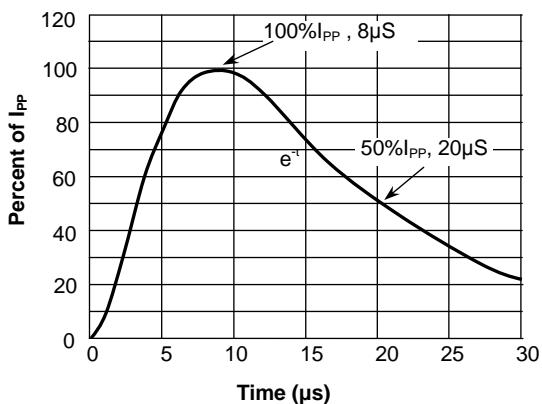
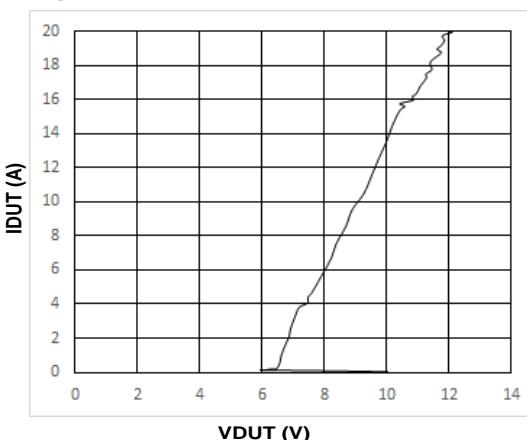
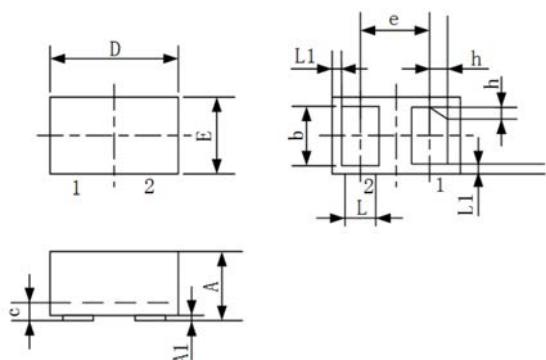
Parameter	Symbol	Value	Unit
Peak Pulse Power ($T_p=8/20\mu s$)	P_{PP}	40	W
ESD contact/air discharge (IEC-61000-4-2)	V_{ESD}	20/20	kV
Peak Pulse Current ($t_p = 8/20\mu s$)	I_{PP}	3.0	A
Junction Temperature	T_J	-55 to +125	°C
Storage temperature	T_{STG}	-55 to +150	°C

Electrical Characteristics

($T_A = 25$ °C unless otherwise specified)

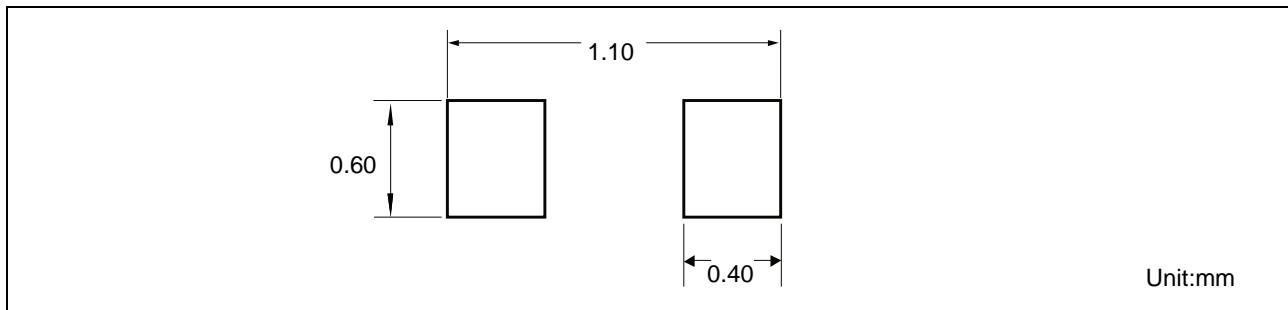
Parameter	Symbol	Condition	Min	Typ	Max	Unit
Reverse stand-off Voltage	V_{RWM}				5	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	5.5		9.5	V
Reverse Leakage Current	I_R	$V_R=5V$		0.01	1	µA
Clamping Voltage(SURGE)	V_C	$I_{PP}=3A, T_p=8/20\mu s$			13.5	V
Clamping Voltage(ESD)	V_C	$V_{ESD} = +6kV$		10.5		V
Clamping Voltage(TLP)	V_C	$I_{PP}=8A, T_p=100ns$		9		V
Clamping Voltage(TLP)	V_C	$I_{PP}=16A, T_p=100ns$		11		V
Dynamic Resistance	R_{dyn}			0.275		Ω
Junction Capacitance	C_J	$V_R=0V, f=1MHz$		3.0		pF

Typical Characteristics ($T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified)

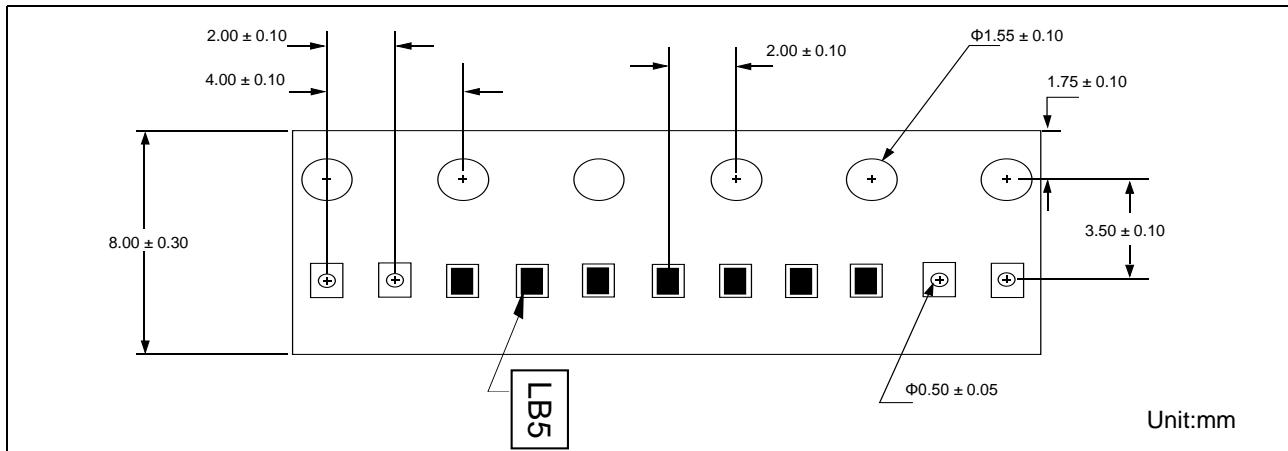
Fig.1 Peak Pulse Power Rating Curve

Fig.2 Pulse Derating Curve

Fig.3 Pulse Waveform-8/20μs

Fig.4 Transmission Line Pulse (tp=100ns)

Package Dimensions


Symbol	Dimensions in millimeters		
	Min	Nom	Max
D	0.95	1.00	1.05
E	0.55	0.60	0.65
b	0.45	0.50	0.55
L	0.20	0.25	0.30
e	0.65 BSC		
A	0.45	0.50	0.55
A1	0	0.02	0.05
c	0.12	0.15	0.18
h	0.07	0.12	0.17
L1	0.05 REF		

Pad Dimensions



Tape and Reel Specification



Marking



Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
YELD1020503AG	DFN1006-2	Tape and reel	10,000pcs / reel	EIA STD RS-481