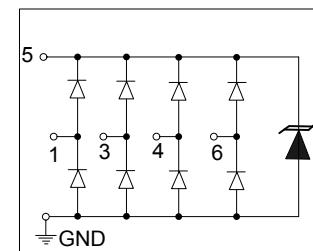
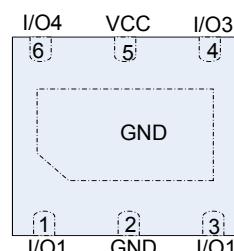
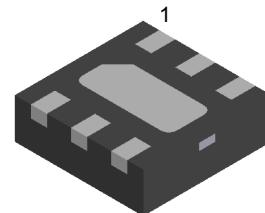


Features

- 30Watts peak pulse power ($t_p = 8/20\mu s$)
- DFN1616-6 Package
- Unidirectional configurations
- Solid-state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- Low capacitance (0.2pF typical I/O to I/O)
- ESD Protection for high-speed data lines to:
 IEC 61000-4-2 ±8kV contact ±15kV air
 IEC 61000-4-4 (EFT) 40A (5/50ns)
 IEC 61000-4-5 (Lightning) 3.5A (8/20μs)



Mechanical Data

- Case: Plastic package.
 Lead free; RoHS compliant; Halogen free
- Molding Compound Flammability Rating:
 UL 94 V-0
- Terminals: High temperature soldering guaranteed:
 260 °C/10 sec. at terminals

Applications

- USB 2.0/3.0
- Video Line Protection
- Analog Video
- LAN/WAN equipment
- Microcontroller Input Protection

Absolute Maximum Ratings







Ratings at 25 °C, ambient temperature unless otherwise specified

Parameter	Symbol	Value	Unit
Peak Pulse Power ($T_p=8/20\mu s$)	P_{PP}	30	W
ESD contact/air discharge (IEC-61000-4-2)	V_{ESD}	8/15	kV
Peak Pulse Current ($t_p = 8/20\mu s$)	I_{PP}	3.5	A
Junction Temperature	T_J	-55 to +125	°C
Storage temperature	T_{STG}	-55 to +150	°C


Electrical Characteristics

($T_A = 25$ °C unless otherwise specified)


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Reverse stand-off Voltage	V_{RWM}				5	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	6			V
Reverse Leakage Current	I_R	$V_R=5V$			0.5	uA
Clamping Voltage(SURGE)	V_C	$I_{PP}=3.5A, T_p=8/20\mu s$		10		V
Junction Capacitance	C_J	$V_R=0V, f=1MHz, I/O to I/O$		0.2		pF
	C_J	$V_R=0V, f=1MHz, I/O to GND$		0.4		pF

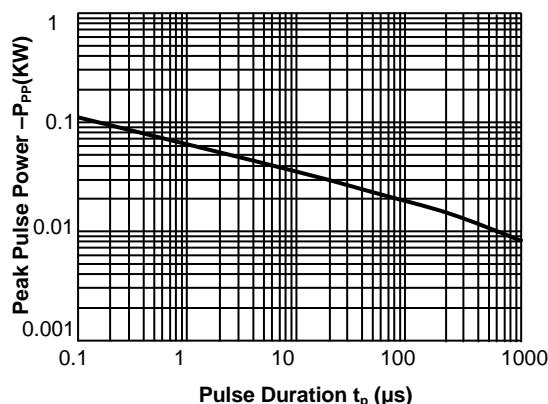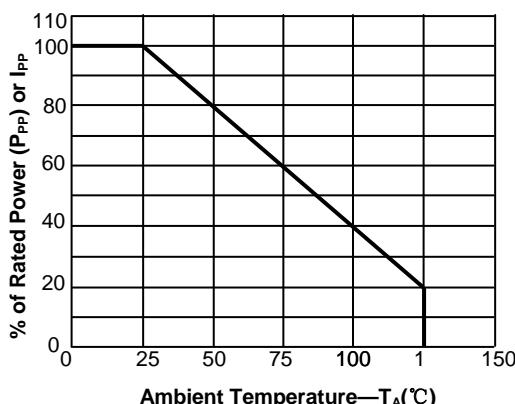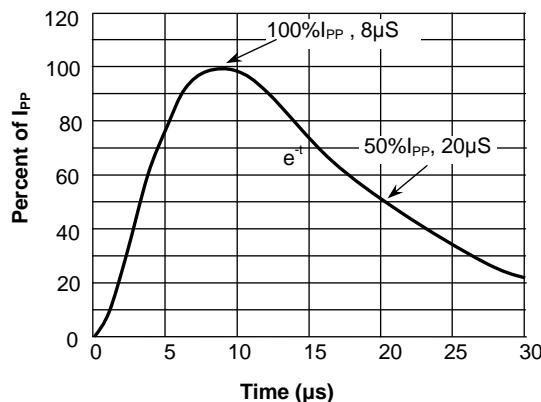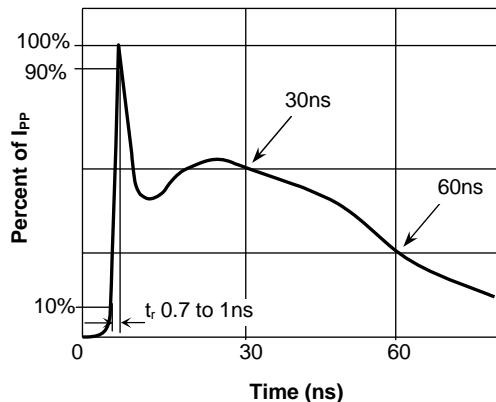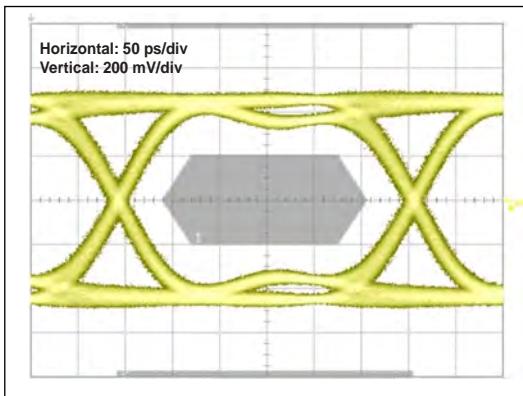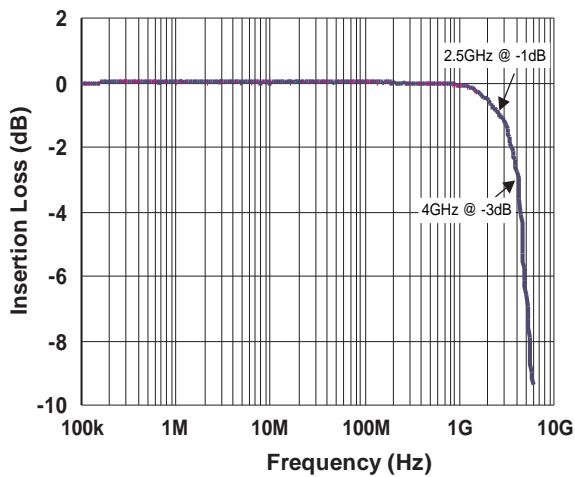Typical Characteristics ($T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified)
Fig.1 Peak Pulse Power Rating Curve**Fig.2 Pulse Derating Curve****Fig.3 Pulse Waveform-8/20μs****Fig.4 Pulse Waveform-ESD(IEC61000-4-2)****Fig.5 Eye Diagram - HDMI mask at 3.4Gbps per channel****Fig.6 Insertion Loss S21 - I/O to GND**

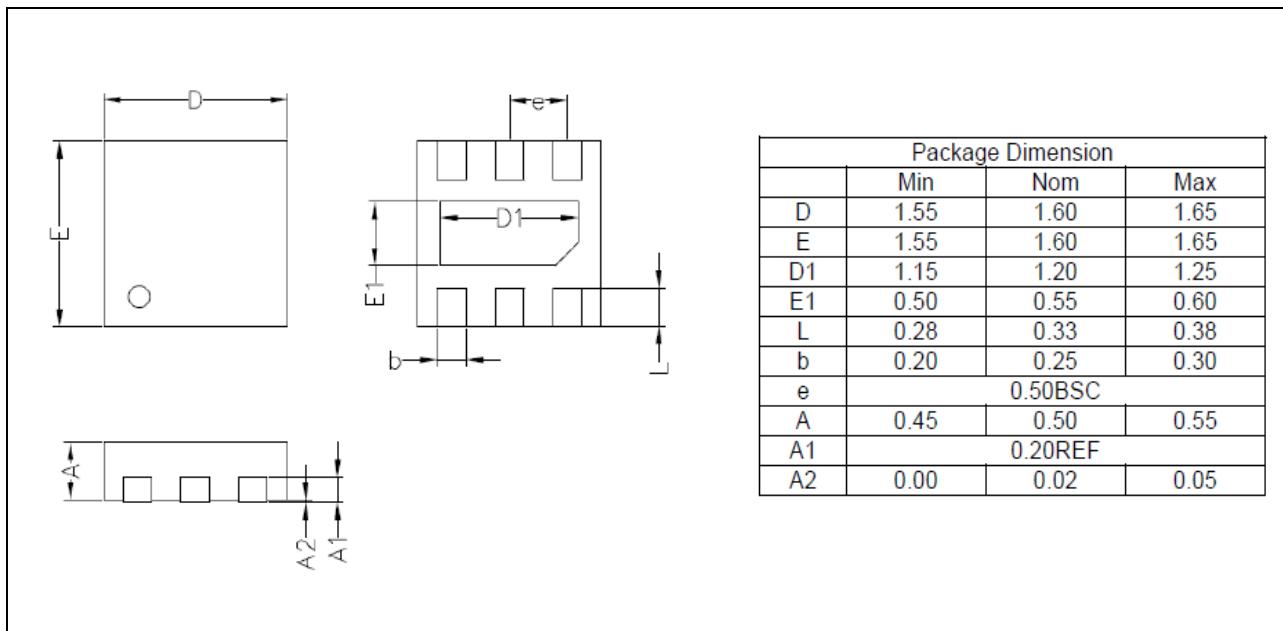Package Dimensions



Part number system

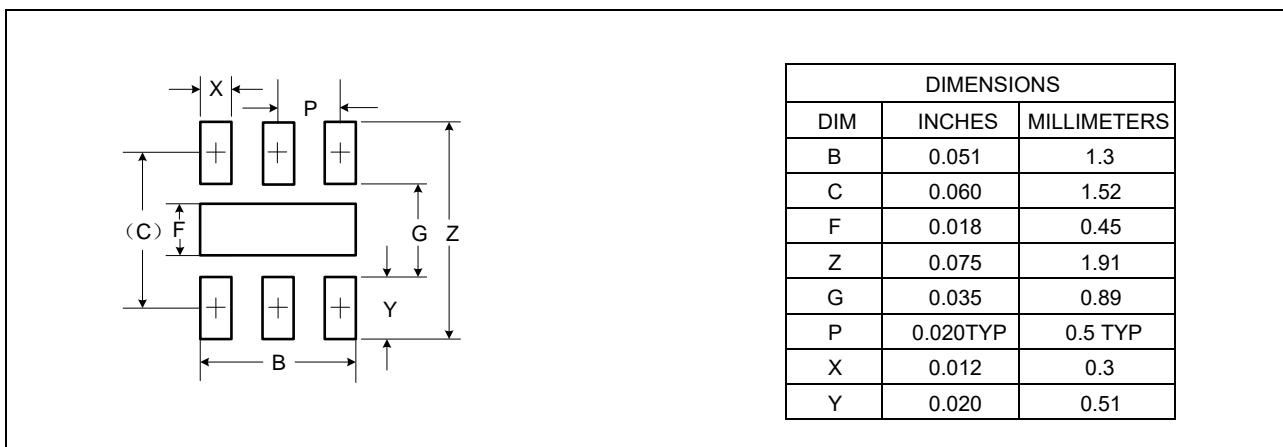

Ordering information

Order code	Marking	Package	Packaging option	Base quantity	Packaging specification
YEU16D6053A5V	M54	DFN1616-6	Tape and reel	3000pcs / reel	EIA STD RS-481