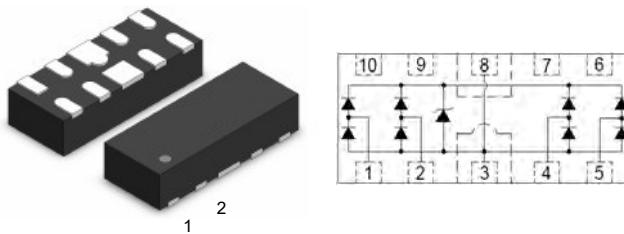


Features

- 40Watts peak pulse power ($t_p = 8/20\mu s$)
- DFN2510-10 Package
- Unidirectional configurations
- Solid-state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- Low capacitance (0.25pF typical I/O to I/O)
- ESD Protection for high-speed data lines to:
 IEC 61000-4-2 ±25KV contact ±30KV air
 IEC 61000-4-4 (EFT) 40A (5/50ns)
 IEC 61000-4-5 (Lightning) 4A (8/20μs)



Mechanical Data

- **Case:** DFN2510-10 (plastic package).
 Lead free; RoHS compliant; Halogen-free
- **Molding Compound Flammability Rating:**
 UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:
 260 °C/10 sec. at terminals

Applications

- USB 3.0, USB 2.0, MHL
- HDMI 2.0, Display Port 1.3, eSATA
- Unified Display Interface (UDI)
- Digital Visual Interface (DVI)
- High speed serial interfaces

Absolute Maximum Ratings







Ratings at 25 °C, ambient temperature unless otherwise specified

Parameter	Symbol	Value	Unit
Peak Pulse Power ($T_p=8/20\mu s$)	P_{PP}	40	W
ESD contact/air discharge (IEC-61000-4-2)	V_{ESD}	25/30	kV
Peak Pulse Current ($t_p = 8/20\mu s$)	I_{PP}	4.0	A
Junction Temperature	T_J	-55 to +125	°C
Storage temperature	T_{STG}	-55 to +150	°C


Electrical Characteristics

($T_A = 25$ °C unless otherwise specified)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Reverse stand-off Voltage	V_{RWM}				5	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	6	7.2	9.0	V
Reverse Leakage Current	I_R	$V_R=5V$		0.02	0.5	μA
Clamping Voltage(SURGE)	V_C	$I_{PP}=1A, T_p=8/20\mu s$			8.5	V
Clamping Voltage(SURGE)	V_C	$I_{PP}=4A, T_p=8/20\mu s$			10	V
Clamping Voltage(TLP)	V_C	$I_{PP}=16A, T_p=100ns$			13	V
Dynamic Resistance	R_{dyn}			0.304		Ω
Junction Capacitance	C_J	$V_R=0V, f=1MHz, I/O to I/O$		0.25		pF
	C_J	$V_R=0V, f=1MHz, I/O to GND$		0.45		pF

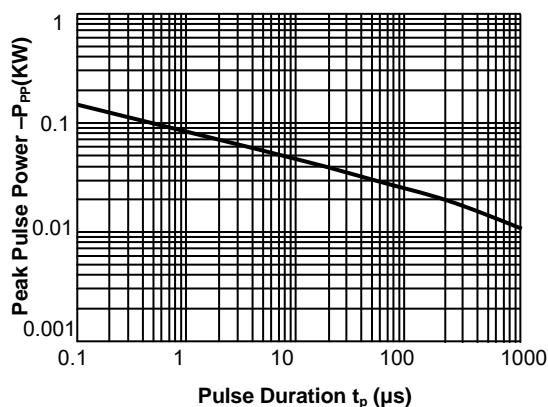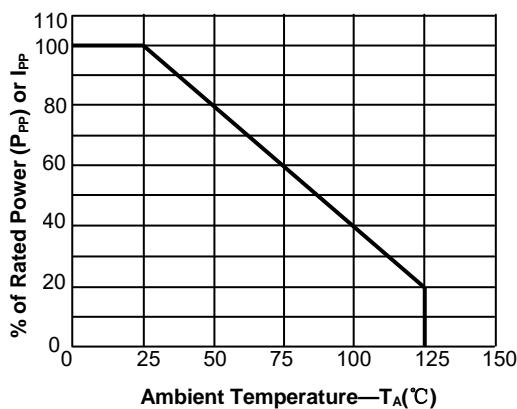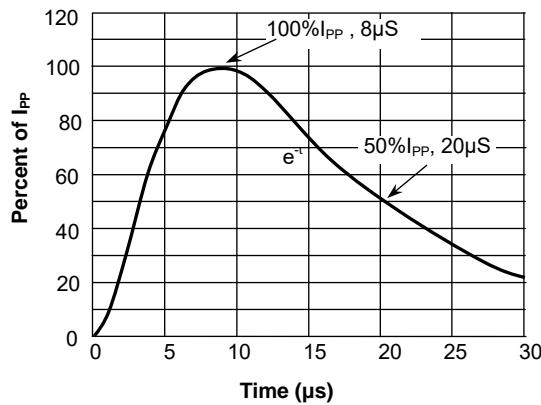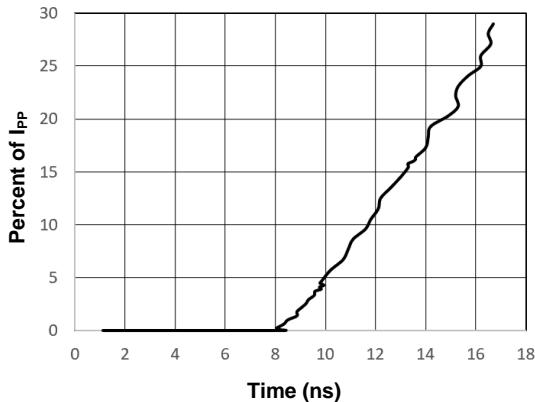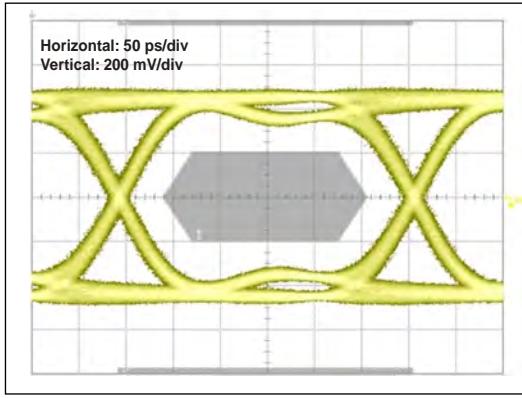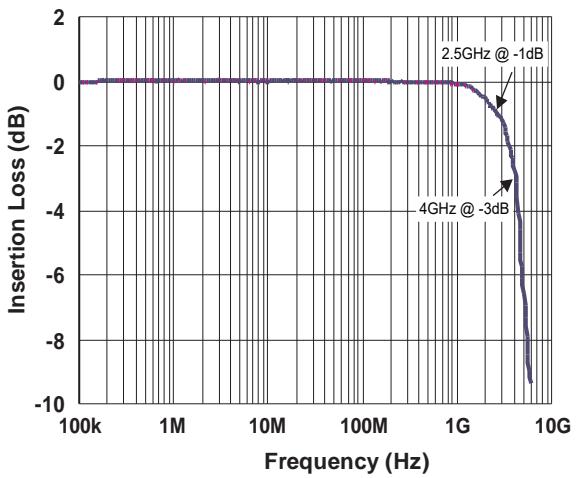
Typical Characteristics ($T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified)
Fig.1 Peak Pulse Power Rating Curve**Fig.2 Pulse Derating Curve****Fig.3 Pulse Waveform-8/20μs****Fig.4 Transmission Line Pulse****Fig.5 Eye Diagram - HDMI mask at 3.4Gbps per channel****Fig.6 Insertion Loss S21 - I/O to GND**

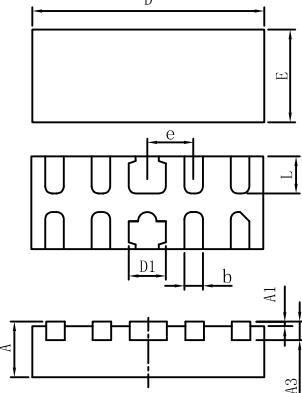Package Dimensions




Symbol	Dimensions in millimeters		
	Min	Nom	Max
A	0.45	0.50	0.55
A1		0.02	0.05
A3	0.10	0.15	0.20
D	2.45	2.50	2.55
E	0.95	1.00	1.05
D1	0.35	0.40	0.45
b	0.15	0.20	0.25
e	0.50BS		
L	0.35	0.40	0.45
A3			

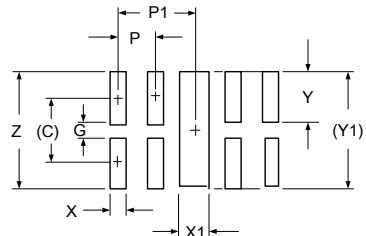Pad Dimensions



DIMENSIONS		
DIM	INCHES	MILLIMETERS
C	.034	0.875
G	.008	0.20
P	.020	0.50
P1	.039	1.00
X	.010	0.25
X1	.018	0.45
Y	.027	0.675
Y1	.061	1.55
Z	.061	1.55

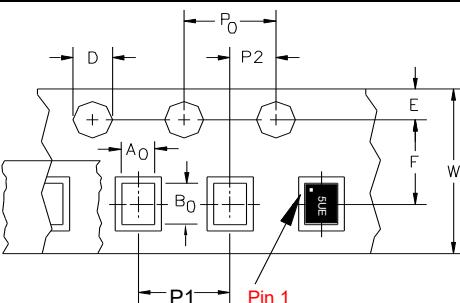Package Information



Dimension	Typical	Unit
A0	1.15	mm
B0	2.65	
D	1.55	
P0	4.00	
P1	4.00	
P2	2.00	
E	1.75	
F	3.50	
W	8.00	

Marking



Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
YEU25CA0504AV	DFN2510-10	Tape and reel	3000pcs / reel	EIA STD RS-481