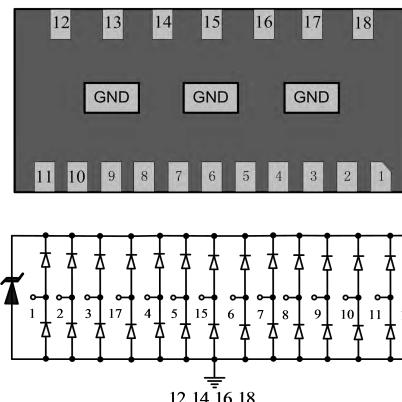


## Features

- 30 Watts peak pulse power ( $T_p = 8/20\mu s$ )
- DFN5515-18 package
- Unidirectional configurations
- Protect up to 14-lines
- Low clamping voltage
- Low Leakage current
- Low capacitance ( $C_j=0.2pF$  typ. I/O to I/O)
- IEC 61000-4-2  $\pm 8KV$  contact  $\pm 15KV$  air
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 3A (8/20 $\mu s$ )



## Mechanical Data

- **Case:** DFN5515-18 (plastic package). Lead free; RoHS compliant; Halogen free
- **Molding Compound Flammability Rating:** UL 94 V-0
- **Terminals:** High temperature soldering guaranteed: 260 °C/10 sec. at terminals

## Applications

- USB 3.0/3.1, Type C
- HDMI 1.4/2.0, Display Port 1.3
- Unified Display interface
- Digital visual interface
- Thunderbolt (Light Peak)

## Absolute Maximum Ratings

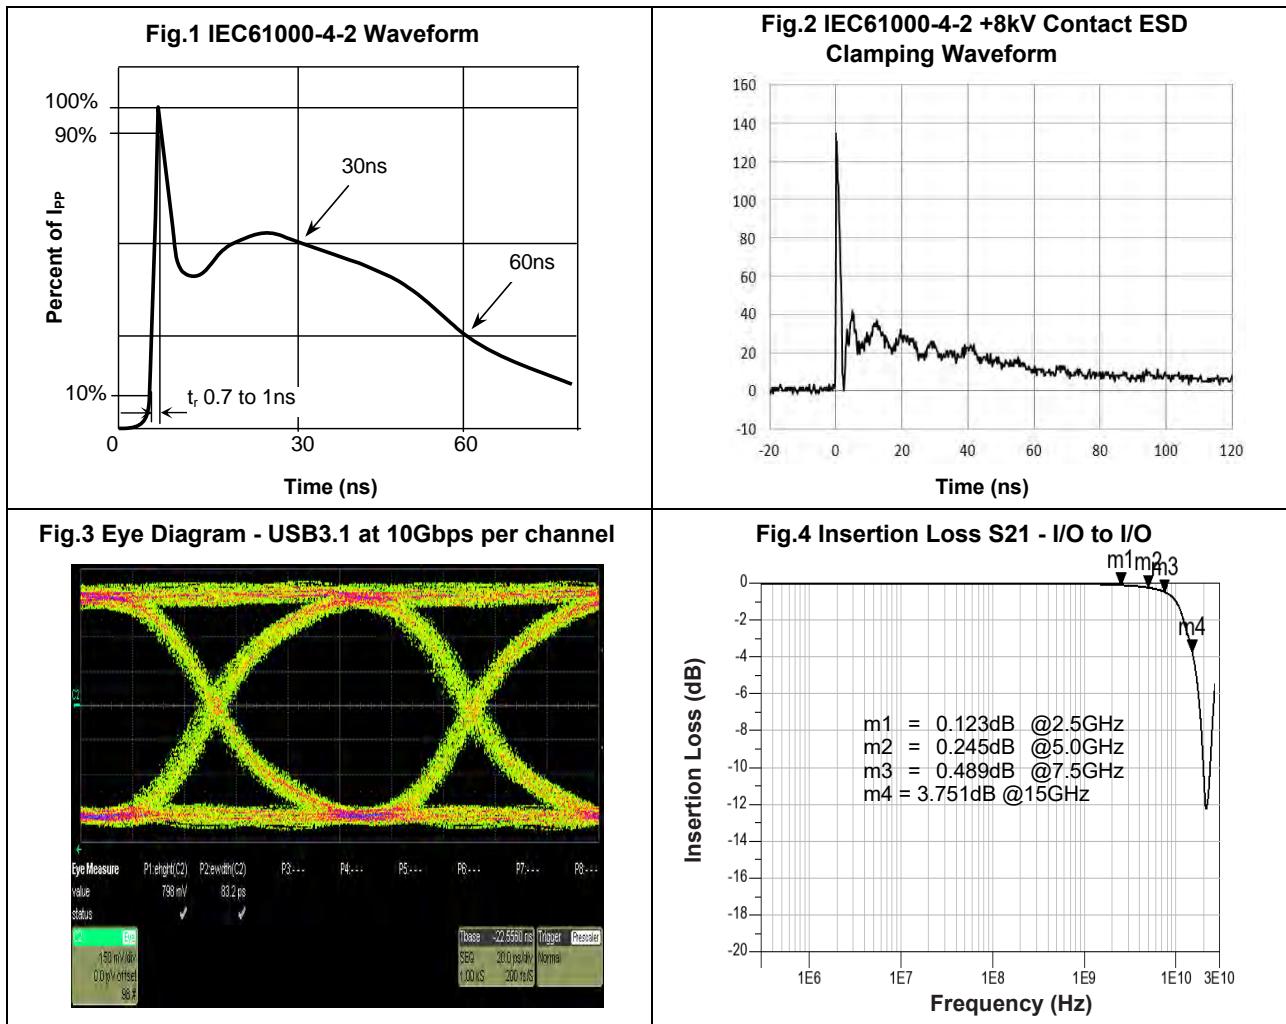
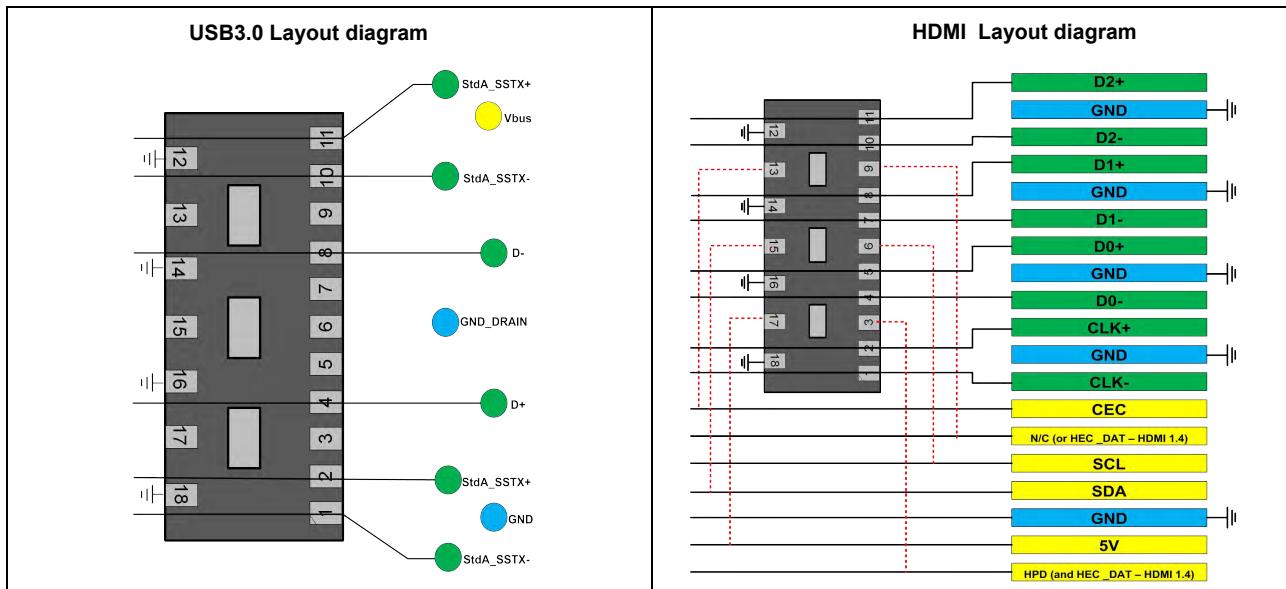
Ratings at 25 °C, ambient temperature unless otherwise specified

Parameter	Symbol	Value	Unit
Peak Pulse Power ( $T_p=8/20\mu s$ )	$P_{PP}$	30	W
ESD contact/air discharge (IEC-61000-4-2)	$V_{ESD}$	8/15	kV
Peak Pulse Current ( $T_p = 8/20\mu s$ )	$I_{PP}$	3	A
Junction Temperature	$T_J$	-55 to +125	°C
Storage temperature	$T_{STG}$	-55 to +150	°C

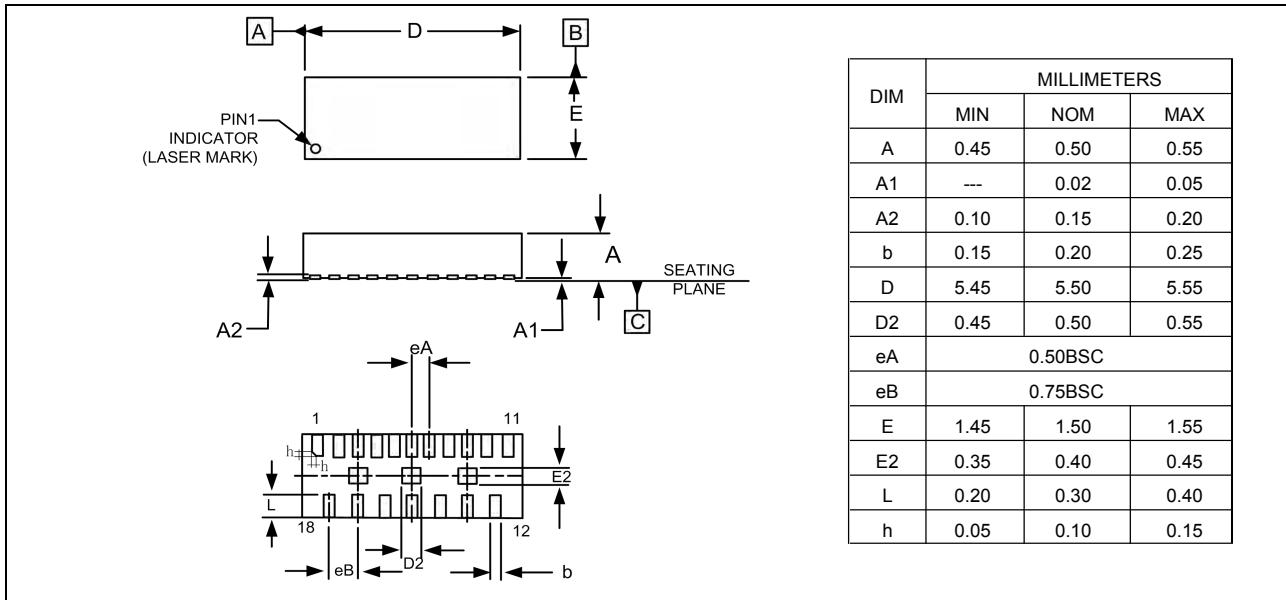
## Electrical Characteristics

( $T_A = 25$  °C unless otherwise specified)

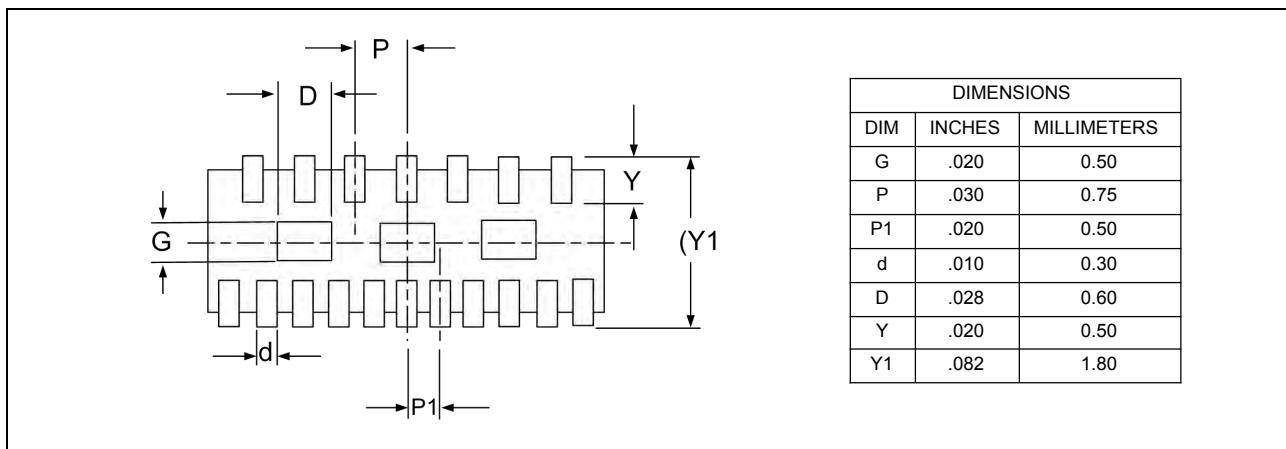
Parameter	Symbol	Condition	Min	Typ	Max	Unit
Reverse stand-off Voltage	$V_{RWM}$				5	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1mA$	6	8		V
Reverse Leakage Current	$I_R$	$V_R=5V$		0.01	1	uA
Clamping Voltage(SURGE)	$V_C$	$I_{PP}=3A, T_p=8/20\mu s$		10		V
Clamping Voltage(ESD)	$V_C$	$V_{ESD} = +8kV$		10		V
Junction Capacitance	$C_J$	$V_R=0V, f=1MHz, I/O to I/O$		0.2		pF
	$C_J$	$V_R=0V, f=1MHz, I/O to GND$		0.4		pF

**Typical Characteristics** ( $T_{amb} = 25^{\circ}\text{C}$  unless otherwise specified)

**Application Information**


### Package Dimensions



### PAD Dimensions



### Ordering information

Order code	Package	Packaging option	Base quantity	Packaging specification
YEU55KF0503AV	DFN5515-18	Tape and reel	3000pcs / reel	EIA STD RS-481