


: YUh fYg

- 32Watts peak pulse power ($T_p = 8/20\mu s$)
- DFN0603-2 package
- Bidirectional configurations
- Solid-state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- Medium capacitance ($C_j=0.45\text{pF}$ typ.)
- Protection one data/power line to:
IEC 61000-4-2 $\pm 8\text{kV}$ contact $\pm 15\text{kV}$ air
IEC 61000-4-4 (EFT) 40A (5/50ns)
IEC 61000-4-5 (Lightning) 4A (8/20 μs)



A YW Ub]WU '8 UHJ

- **7 UhY.** DFN0603-2 (plastic package).
Lead free; RoHS compliant; Halogen Free
- **Ac`X]b['7 ca dci bX': 'Ua a UV]JmF Uh]b[.**
UL 94 V-0
- **HYfa]bUg.** High temperature soldering guaranteed:
260 °C/10 sec. at terminals

Applications

- Cell Phone Handsets and Accessories
- Personal Digital Assistants (PDA's)
- Microprocessor based equipment
- Notebooks, Desktops, and Servers
- Portable Instrumentation

5 Vgc`i hY'A U]a i a 'FU]b[g


Ratings at 25 °C, ambient temperature unless otherwise specified

Parameter	Symbol	Value	Unit
Peak Pulse Power ($T_p=8/20\mu s$)	P_{PP}	32	W
ESD contact/air discharge (IEC-61000-4-2)	V_{ESD}	8/15	kV
Peak Pulse Current ($T_p = 8/20\mu s$)	I_{PP}	4	A
Junction Temperature	T_J	-55 to +125	°C
Storage temperature	T_{STG}	-55 to +150	°C

Electrical Characteristics

($T_A = 25$ °C unless otherwise specified)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Reverse stand-off Voltage	V_{RWM}				24.0	V
Holding Voltage	V_H	$I_T=I_H$		3.0		V
Holding Current	I_H		35			mA
Reverse Leakage Current	I_R	$V_{RWM}=22V$			500	nA
Clamping Voltage	V_C	$I_{PP}=4A, T_p=8/20\mu s$		8.0		V
Clamping Voltage(TLP)	V_C	$I_{PP}=16A, T_p=100ns$		9.6		V
Trigger Voltage	V_T			24		V
Dynamic Resistance	R_{dyn}	$T_p=100ns$		0.38		Ω
Junction Capacitance	C_J	$V_R=0V, f=1MHz$		0.45		pF

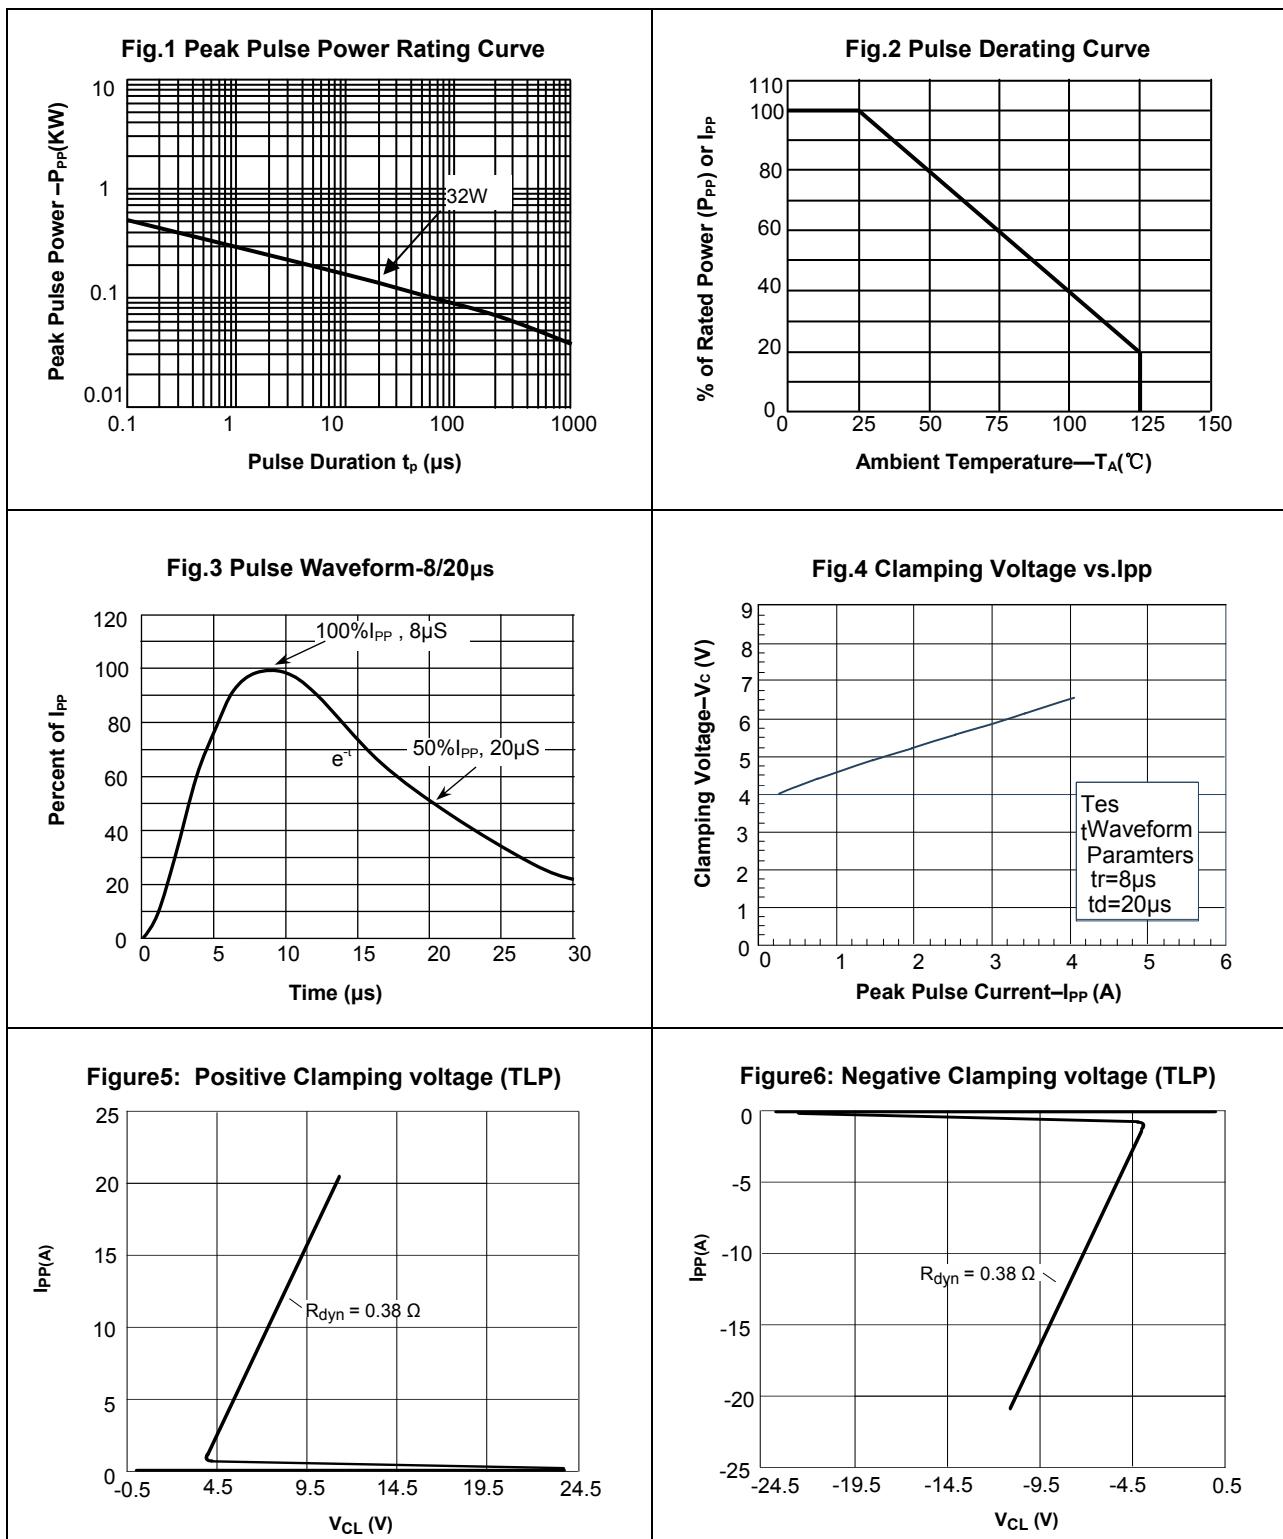Typical Characteristics ($T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified)


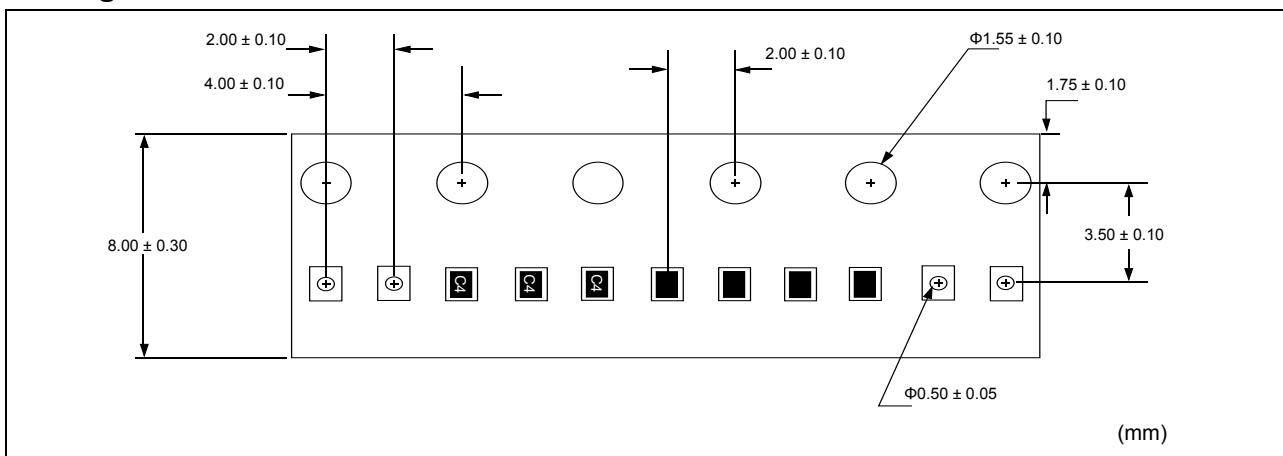
Package Dimensions

Symbol	Dimensions in millimeters		
	Min	Nom	Max
A	0.23	-	0.33
A1	0.00	-	0.05
D	0.55	0.60	0.65
E	0.25	0.30	0.35
b	0.215	0.245	0.275
L	0.160	0.190	0.220
L1	0.160	0.190	0.220
e	0.355 BSC		

Pad Dimensions

Dimensions	Value (mm)
C	0.380
X	0.230
X1	0.610
Y	0.300

Package Information



Ordering information

Order code	Marking	Package	Packaging option	Base quantity	Packaging specification
YEUD0622404AB	C4	DFN0603-2	Tape and reel	10000pcs / reel	EIA STD RS-481