


Features

- 50Watts peak pulse power ($t_p = 8/20\mu s$)
- DFN0603-2 package
- Bidirectional configurations
- Solid-state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- Medium capacitance ($C_J=0.2pF$ typ.)
- Protection one data/power line to:
IEC 61000-4-2 $\pm 18kV$ contact $\pm 18kV$ air
IEC 61000-4-4 (EFT) 40A (5/50ns)
IEC 61000-4-5 (Lightning) 7A (8/20 μs)

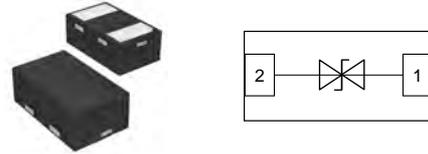

Mechanical Data

- **Case:** DFN0603-2 (plastic package).
Lead free; RoHS compliant; Halogen free
- **Molding Compound Flammability Rating:**
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:
260 °C/10 sec. at terminals

Applications

- Cell Phone Handsets and Accessories
- Personal Digital Assistants (PDA's)
- Microprocessor based equipment
- Notebooks, Desktops, and Servers
- Portable Instrumentation

Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified


| Parameter | Symbol | Value | Unit |
|---|-----------|-------------|------|
| Peak Pulse Power ($T_p=8/20\mu s$) | P_{PP} | 50 | W |
| ESD contact/air discharge (IEC-61000-4-2) | V_{ESD} | 18/18 | kV |
| Peak Pulse Current ($t_p = 8/20\mu s$) | I_{PP} | 7 | A |
| Junction Temperature | T_J | -55 to +125 | °C |
| Storage temperature | T_{STG} | -55 to +150 | °C |

Electrical Characteristics


($T_A = 25$ °C unless otherwise specified)

| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|---------------------------|-----------|----------------------------|-----|------|------|----------|
| Reverse stand-off Voltage | V_{RWM} | | | | 3.3 | V |
| Holding Voltage | V_H | $I_T=I_H$ | 2.0 | | 5.0 | V |
| Holding Current | I_H | | 15 | | | mA |
| Reverse Leakage Current | I_R | $V_{RWM}=5V$ | | | 500 | nA |
| Clamping Voltage | V_C | $I_{PP}=7A, t_p=8/20\mu s$ | | 6.0 | 7.5 | V |
| Clamping Voltage(TLP) | V_C | $I_{PP}=16A, T_p=100ns$ | | 7.0 | | V |
| Trigger Voltage | V_T | | 8 | | 16 | V |
| Dynamic Resistance | R_{dyn} | $T_p=100ns$ | | 0.25 | | Ω |
| Junction Capacitance | C_J | $V_R=0V, f=1MHz$ | | 0.20 | 0.50 | pF |


Typical Characteristics ($T_{amb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

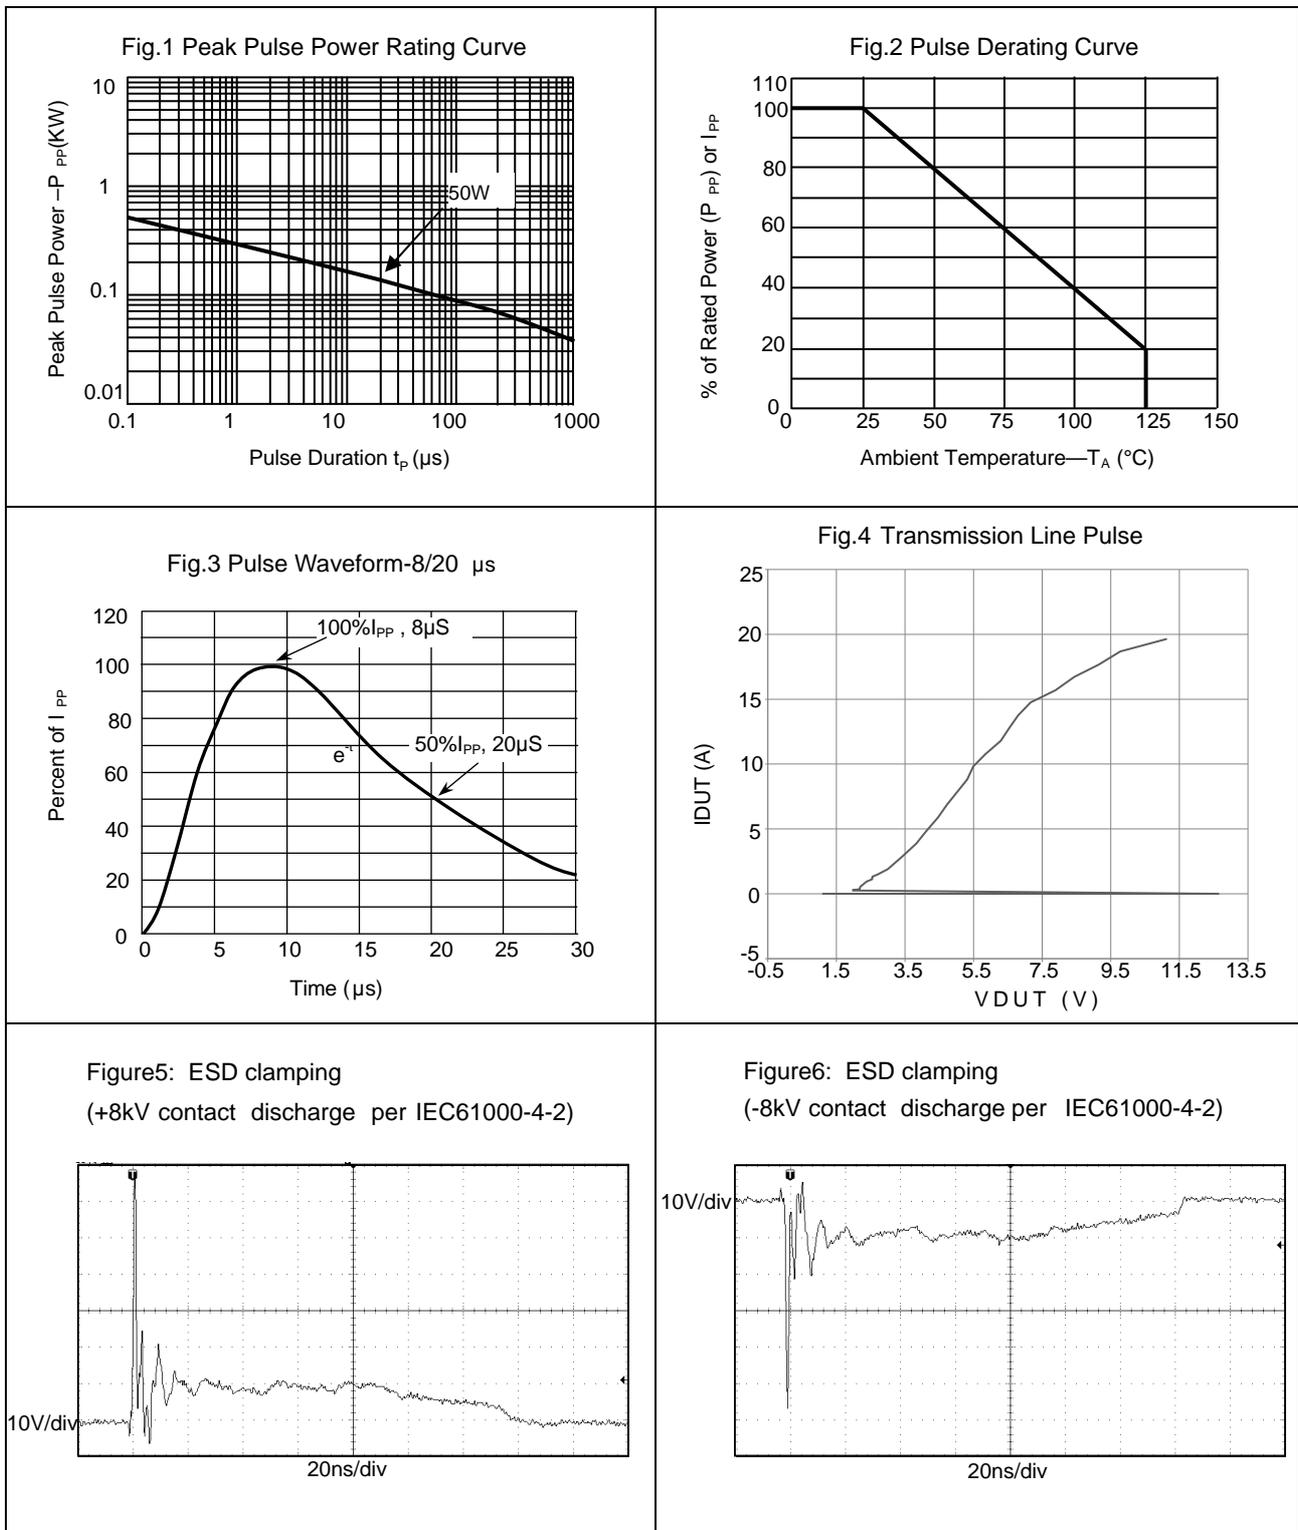


Package Dimensions

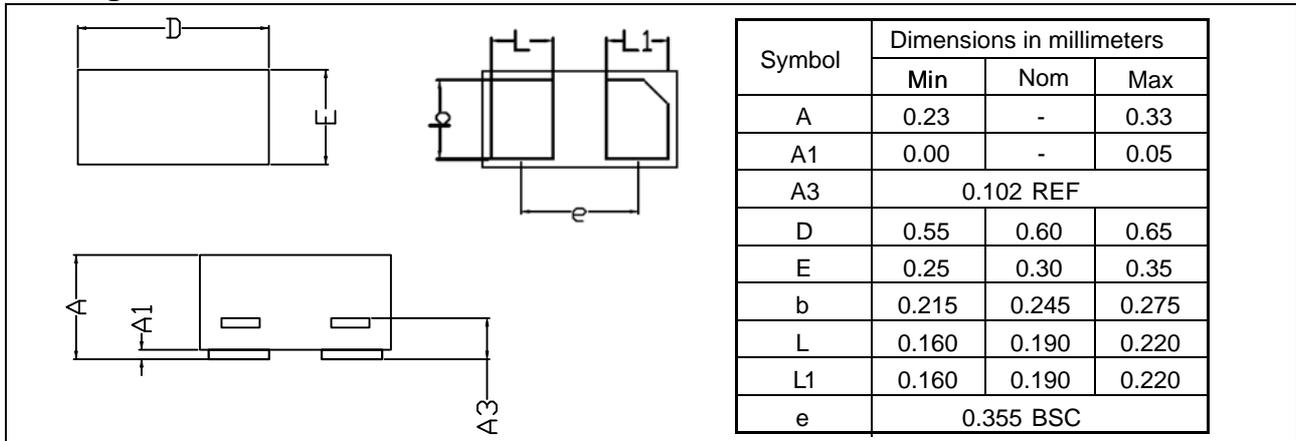

Pad Dimensions

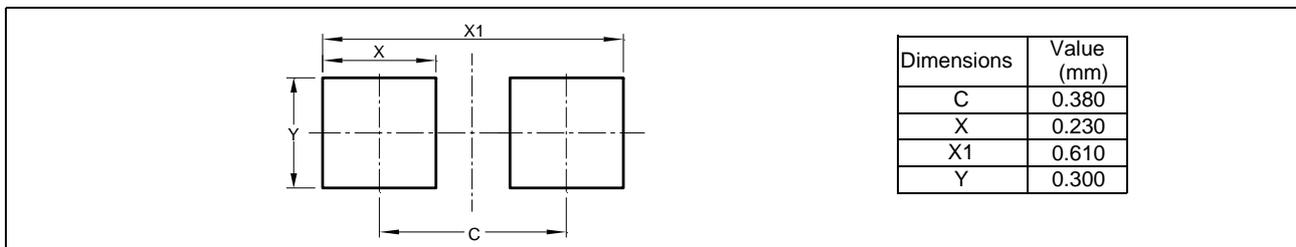

Package Information

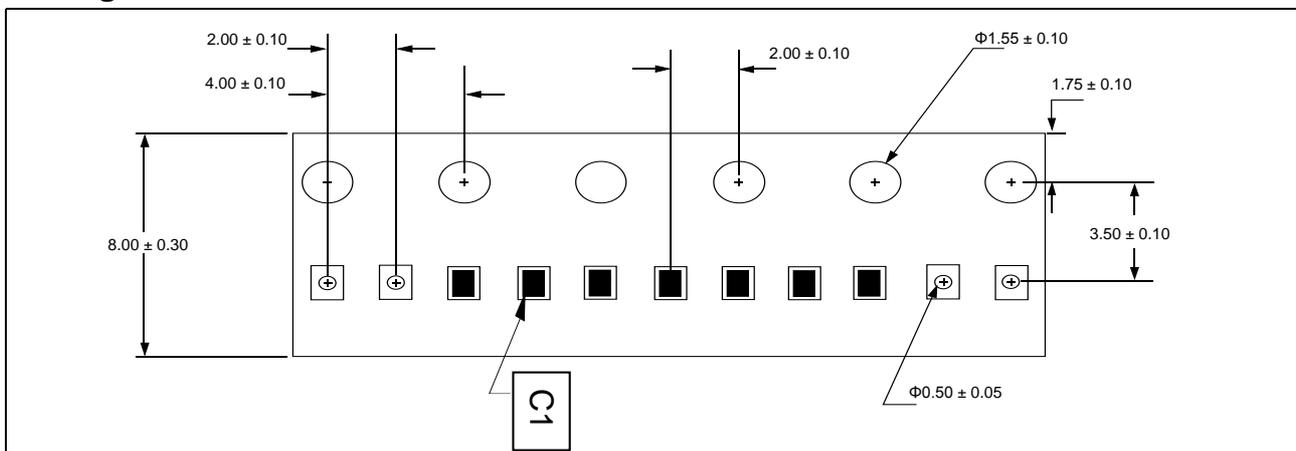

Ordering information

| Order code | Marking | Package | Packaging option | Base quantity | Packaging specification |
|---------------|---------|-----------|------------------|-----------------|-------------------------|
| YEUD0623R07AB | C1 | DFN0603-2 | Tape and reel | 10000pcs / reel | EIA STD RS-481 |