

Cover panels




art. no.	handle perforation	suitable for subracks
BGTG 384 6	with	3 U
BGTG 684 6		6 U
BGTO 384 6	without	3 U
BGTO 684 6		6 U

Rear terminal profile


– 2 pieces cover the 2.54 mm gap between the part front panel and side panel





art. no.	suitable for subracks	art. no.	suitable for subracks
RA 3	3 U	**RA 6**	6 U
surface:	natural colour anodised		


Perforated cover panel



art. no.	depth of PCB [mm]	art. no.	depth of PCB [mm]
AB 211	160	**AB 271**	220

Backpanel protective cover


– with side panel depth of 240 and 300 mm gives mechanical and antistatic protection
– delivery incl. mounting material



art. no.	suitable for subracks
RV 3 240	3 U

Guide-rails


– with advanced mounting pins and locking neps for easy mounting



art. no.	for Eurocards [mm]
FSC 100	100x100/ 233.5x100
FSC 160	100x160/ 233.5x160
FSC 220	100x220/ 233.5x220

Variable guide-rails


– contains 1 pair of head pieces (left and right) and 1 profile
– head pieces (1 pair): art. no. **FSC V**; profile (in running meters) art. no. **FSC P**
– further profile lengths upon request

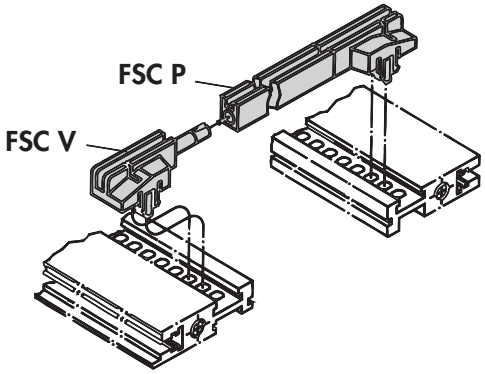

art. no.	art. no.
FSC P	**FSC V**

Reinforced guide rails

– easy and fast to mounting by using clips
– can also be screwed into the module rails (M2.5 x 12, on request)
– high rigidity
– centred with spring-loaded strut
– good ventilation due to lattice work

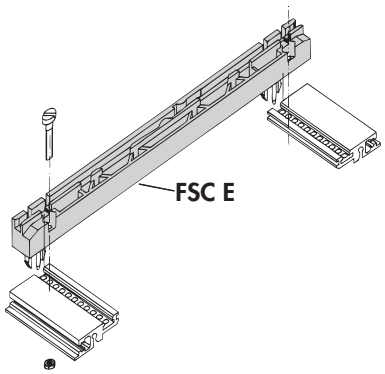

art. no.	for Eurocards [mm]
FSC E 160	100x160/ 233.5x160
FSC E 220	100x220/ 233.5x220