

Tilt foot

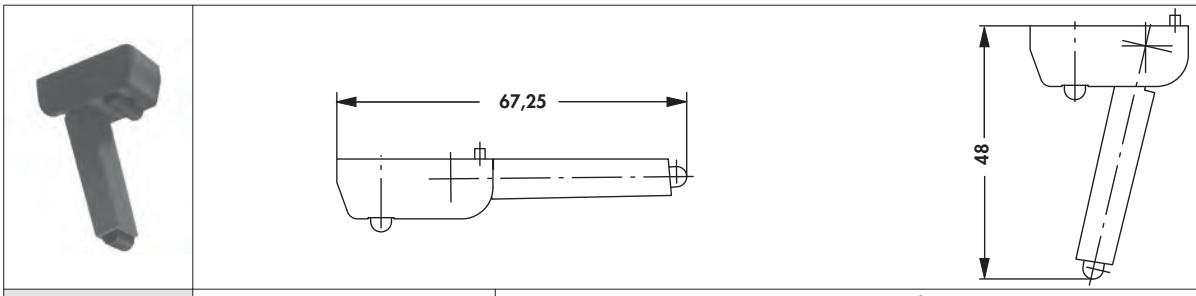

art. no.	mounting	type of delivery
AF 1	by screws	set (2 pcs. with tilt bracket / 2pcs.without tilt bracket+assembly material)


colour:	black
material:	glass fibre filled polyamide with rubber insert (skid and scratch resistant)

Feet

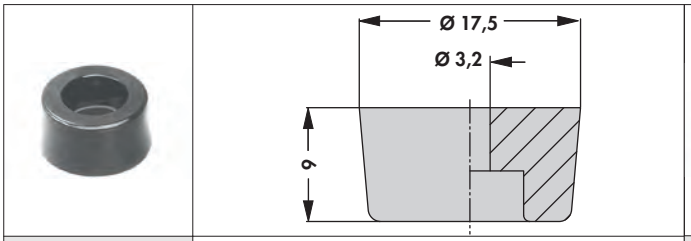

art. no.	mounting	art. no.	mounting
GF 1759	by screws	GF 1710	by pressing into the chassis drilling

Bushings

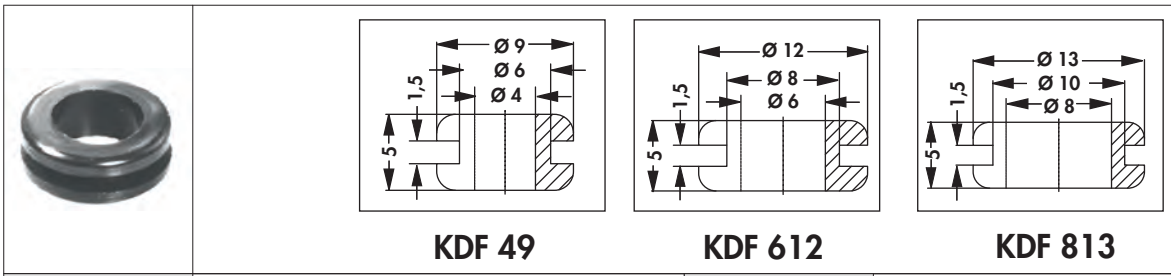


KDF 49 KDF 612 KDF 813

art. no.	mounting	art. no.	mounting
KDF 49	by pressing into the chassis drilling	KDF 813	by pressing into the chassis drilling
KDF 612			

colour:	black
material:	impact proof polystyrene (tri-soluble)

Ventilation-frames

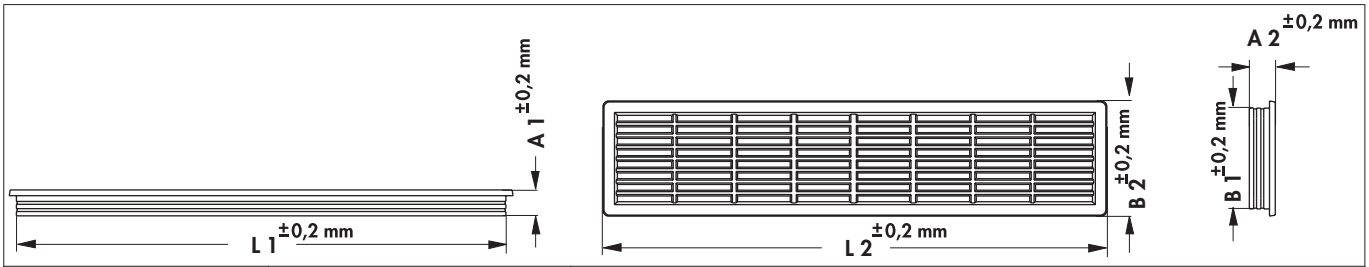

art. no.	mounting	dim. [mm]					
		L 1	L 2	A 1	A 2	B 1	B 2
LB 15040 SW	for fixingA plastic-glue is suitable	144.5	149	6.5	8.2	35	40