

EMC seals for combination cases, EUROTAINER, RAIL and TUG

- consisting of 0.8 mm thick electrically conductive rubber silicone
- placed between housing profiles and covers, additionally the protection class IP54 is achievable
- the housing halves can also be shielded or sealed in the longitudinal groove using EMC silicone tubing
- for achieving a EMC shield the case is to be ordered with an electrically conductive finish:
  TP = chrome-free transparent passivated/on request additional lacquering of the exterior surfaces
- **EMC silicone hose:** core Ø = 0.5 mm; outside Ø = 1.4 mm; **art. no. LSS 10 ...** (please specify requested length in m)

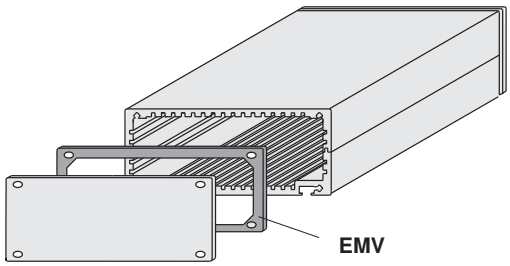

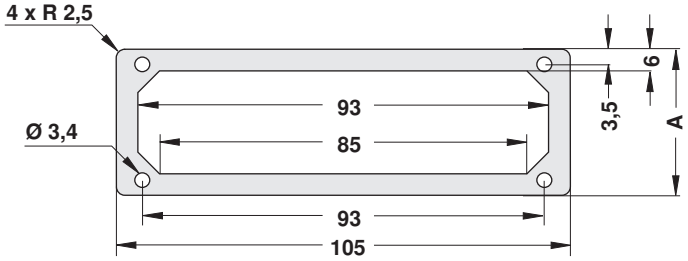

art. no.	for **EURO-TAINER**	for RAIL	for TUG	for combination cases	VPE	dim. [mm] A
EDKO 33	ET 01 01 ...	—	TUG 03 ...	KO H 1+KO H 1	6 pcs.	33
EDKO 38	ET 02 01 ...		—	KO H 1+KO H 2/ KO H 1+KO E 2/ KO H 1+KO L 2/ KO H 1+KO W 2		38
EDKO 44	ET 02 02 ...	RL 05 ...	TUG 05 ...	KO H 2+KO E 2/ KO H 2+KO H 2/ KO H 2+KO L 2/ KO H 2+KO W 2		44
EDKO 57 T	—	—	—	KO H 4 A+KO T 2		57
EDKO 49	ET 04 01 ...			KO H 1+KO H 4 A	4 pcs.	49
EDKO 54	ET 04 02 ...		TUG 07 ...	KO H 2+KO H 4 A/ KO H 4 A+KO E 2/ KO H 4 A+KO L 2/ KO H 4 A+KO W 2		54
EDKO 59	ET 06 01 ...		—	KO H 1+KO H 6		59
EDKO 64	ET 06 02 ...		TUG 09 ...	KO H 2+KO H 6/ KO H 6+KO E 2/ KO H 6+KO L 2/ KO H 6+KO W 2		64
EDKO 69	ET 10 00 ...		—	KO H 0+KO H 10/ KO H 1+KO H 8/ KO H 2+KO H 7/ KO H 1+KO F 3/ KO H 4 A + KO G 5		69
EDKO 74	ET 06 04 ...			KO F 3+KO R 2/ KO H 6+KO H 4 A/ KO H 8+KO H 2/ KO H 8+KO L 2/ KO H 8+KO R 2		74
EDKO 79	ET 10 01 ...			KO H 1+KO H 10		79
EDKO 84	ET 10 02 ...			KO H 2+KO H 10/ KO H 6+KO H 6/ KO H 10+KO L 2/ KO H 10+KO W 2		84
EDKO 100	ET 14 01 ...			KO H 1+KO H 14	2 pcs.	100
EDKO 105	ET 14 02 ...	RL 17 ...	TUG 17 ...	KO H 2+KO H 14/ KO H 14+KO E 2/ KO H 14+KO W 2/ KO H 14+KO L 2		105
EDKO 125	ET 14 06 ...	—	—	KO H 6+KO H 14/ KO H 10+KO H 10		125
EDKO 145	ET 14 10 ...			KO H 14+KO H 10		145
EDKO 165	ET 14 14 ...			KO H 14+KO H 14		165


temperature range:	-55°C ... +200°C
surface:	transparent passivated
material:	conductive rubber silicone, 0.8mm thick



art. no.
LSS 10

EMC - IP seals

– the protection class IP52 is achievable for the profiles **KO HL ...** by using a 3mm thick cover plate

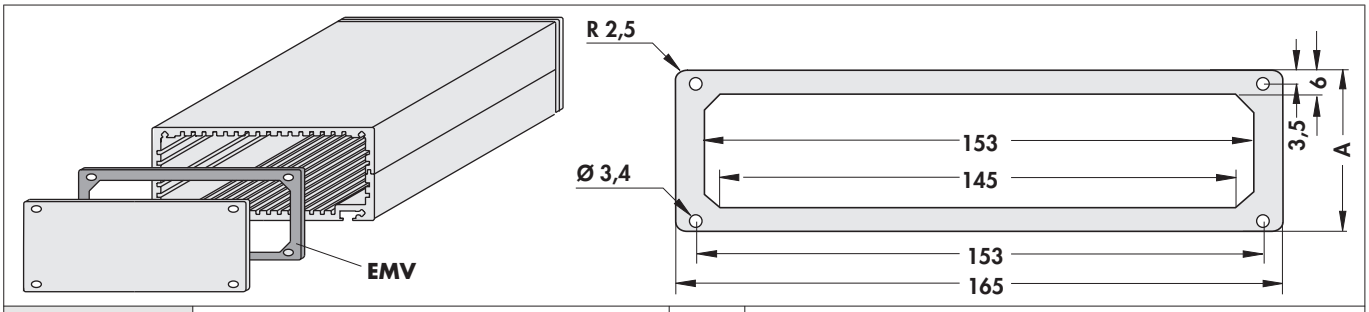



art. no.	for combination cases	VPE	dim. [mm] A
EDKOL 23	KO HL 0+KO HL 1	6 pcs.	23.6
EDKOL 28	KO HL 0+KO HL 2/ KO HL 0+KO LL 2		28.7
EDKOL 33	KO HL 1+KO HL 1		33.8
EDKOL 38	KO HL 1+KO LL 2/ KO HL 1+KO HL 2		38.9
EDKOL 44	KO HL 2+KO HL 2/ KO HL 2+KO LL 2		44.0
EDKOL 49	KO HL 1+KO HL 4/ KO HL 6+KO HL 0	4 pcs.	49.0
EDKOL 54	KO HL 2+KO HL 4/ KO HL 4+KO LL 2		54.1
EDKOL 59	KO HL 1+KO HL 6		59.3
EDKOL 64	KO HL 2+KO HL 6/ KO HL 4+KO HL 4/ KO HL 6+KO LL 2		64.4
EDKOL 69	KO HL 0+KO HL 10		69.4
EDKOL 74	KO HL 4+KO HL 6	2 pcs.	74.5
EDKOL 79	KO HL 1+KO HL 10		79.6
EDKOL 84	KO HL 2+KO HL 10/ KO HL 6+KO HL 6/ KO LL 2+KO HL 10		84.7
EDKOL 89	KO HL 0+KO HL 14		89.7
EDKOL 94	KO HL 4+KO HL 10		94.8
EDKOL 100	KO HL 1+KO HL 14		99.9
EDKOL 105	KO HL 2+KO HL 14/ KO HL 6+KO HL 10/ KO HL 14+KO LL 2		105.0
EDKOL 115	KO HL 4+KO HL 14		115.1
EDKOL 125	KO HL 6+KO HL 14/ KO HL 10+KO HL 10		125.4
EDKOL 145	KO HL 10+KO HL 14	1 pcs.	145.7
EDKOL 166	KO HL 14+KO HL 14		166.0

temperature range:	-55°C ... +200°C
material:	conductive rubber silicone, 0.8mm thick

EMC seals for TUF

- consisting of 0.8 mm thick electrically conductive rubber silicone
- placed between housing profiles and covers
- in order to achieve a EMC screening the **TUF cases** have to be ordered with an electrically conductive surface: **TP** = chrome-free transparent passivated/on request additional lacquering of the exterior surfaces

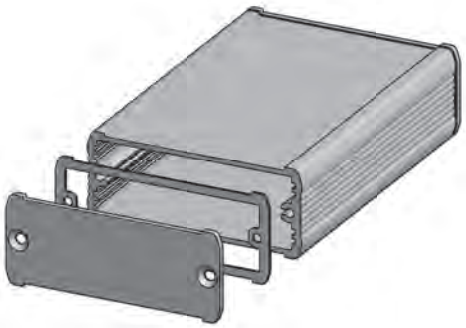


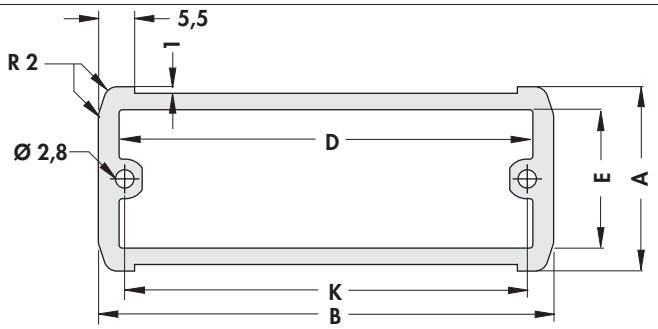


art. no.	for TUF	VPE	dim. [mm] A	B	D	E	K
EDKO 41 16	TUF 41 16...	6 pcs.	16	41.3	35.0	9	33.30
EDKO 55 16	TUF 55 16 ...			55.0	48.7		47.00
EDKO 55 25	TUF 55 25 ...		25			18	
EDKO 55 35	TUF 55 35 ...		35			28	
EDKO 69 28	TUF 69 28 ...		28	69.1	62.8	21	61.10
EDKO 80 42	TUF 80 42 ...		42	80.0	72.9	34	71.00
EDKO 94 32	TUF 94 32 ...	4 pcs.	32	94.3	88.0	25	86.30
EDKO 105 52	TUF 105 52 ...	6 pcs.	52	105.0	97.9	44	96.00
EDKO 120 42	TUF 120 42 ...	4 pcs.	42	120.0	112.9	34	110.95
temperature range:			-55°C ... +200°C				
material:			conductive rubber silicone, 0.8mm thick				

EMC seals for TUS

- consisting of 0.8 mm thick conductive rubber silicone
- placed between housing profiles and covers
- in order to achieve a EMC screening the **TUF cases** have to be ordered with an electrically conductive surface: **TP** = chrome-free transparent passivated/on request additional lacquering of the exterior surfaces

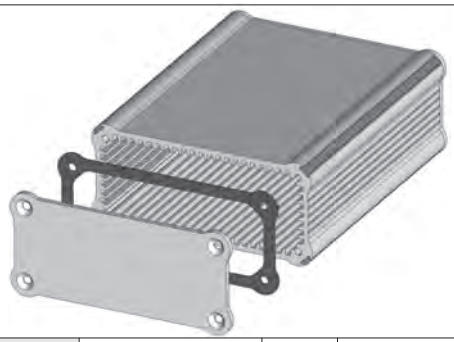

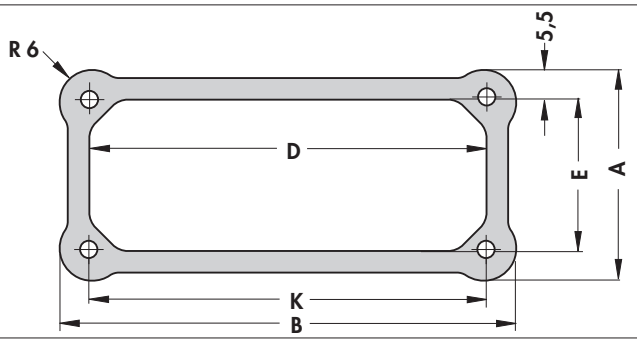

art. no.	for TUS	VPE	dim. [mm] A	B	D	E	K
EDKO 58 39	TUS 58 39 ...	6 pcs.	39	58.9	47.9	28	47.9
EDKO 84 39	TUS 84 39 ...			84.5	73.5		73.5
temperature range:			-55°C ... +200°C				
material:			conductive rubber silicone, 0.8mm thick				