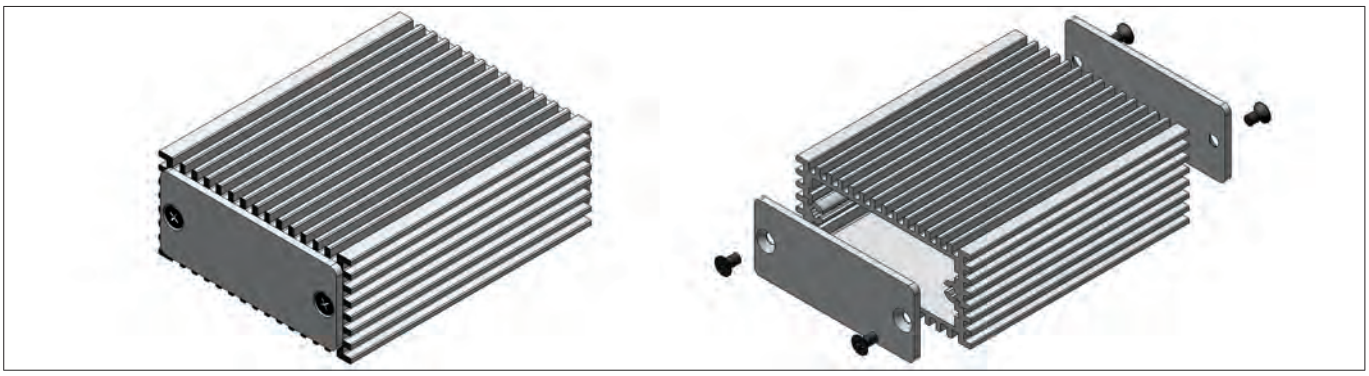
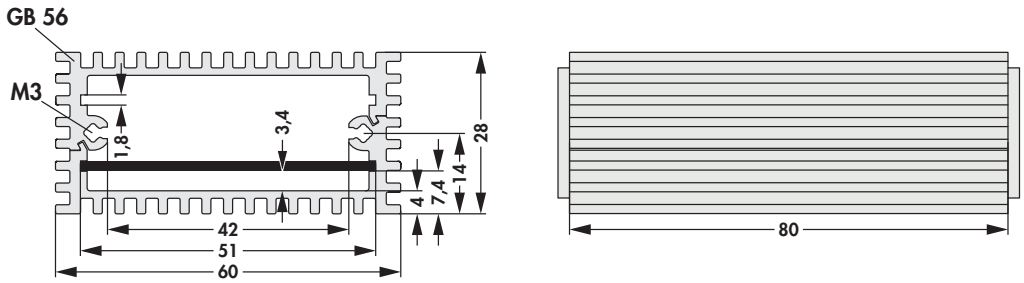


– with integrated cooling fins; casing tubes made of aluminium sections which are slotted into each other and screwed together
– the tubes form a guide groove in the centre for insertion of a printed circuit board or installation plate with a thickness of 1.5-1.6 mm and a width of 44 mm
– D-Sub connector, 25-way, can be mounted ➔ **f.con "I"**
– profile can also be combined with the profiles of case AKG 55 (**GB 39** and **GB 46**)
– supplied as demounted kit, incl. 2 mm cover panels and mounting material
– surface natural colour anodised
– cutouts, special lengths and other surface treatments upon request

art. no.	
KRK 60 28 80 ME	

Profile sold by the metre ➔ M 55