


– 3 U insert modules with side panels made of heatsink profile, optimal heat dissipation due to fluted cooling fins
– profiles with ventilation slots and internal guiding ridges
– rear panel cut-out for connectors DIN 41612 designs B, C, D, F and H
– front panel treatments, further heights or HPs on request
– front panel, rear panel and profile natural colour anodised, heatsink black anodised

1 = front panel; **2** = screening plate, right side; **3** = screening plate, left side; **4** = for threaded rail or nut M2.5;
5 = heatsink **SK 421**; **6** = tab, perforated; **7** = rear panel; **8** = plastic handle **GLK**; **9** = guiding ridge in the subrack;
10 = internal card guide; **11** = drilling for card; **12** = profile GP 199 ➔ N 71

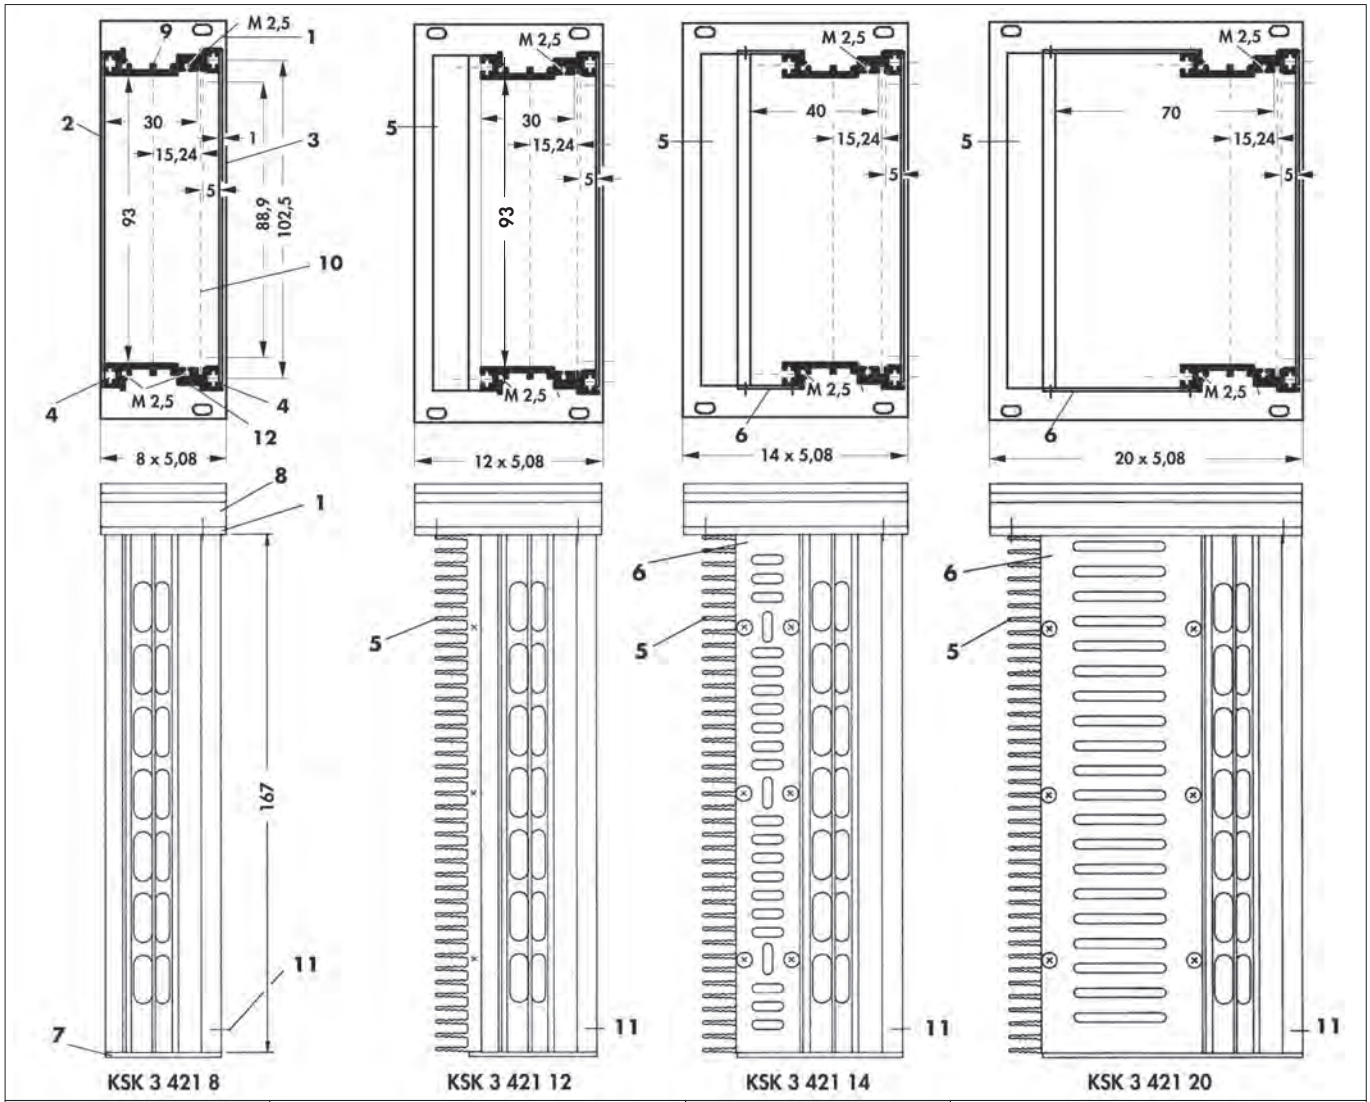

art. no.	HP	art. no.	HP
KSK 3 421 8	8	**KSK 3 421 14**	14
KSK 3 421 12	12	**KSK 3 421 20**	20