
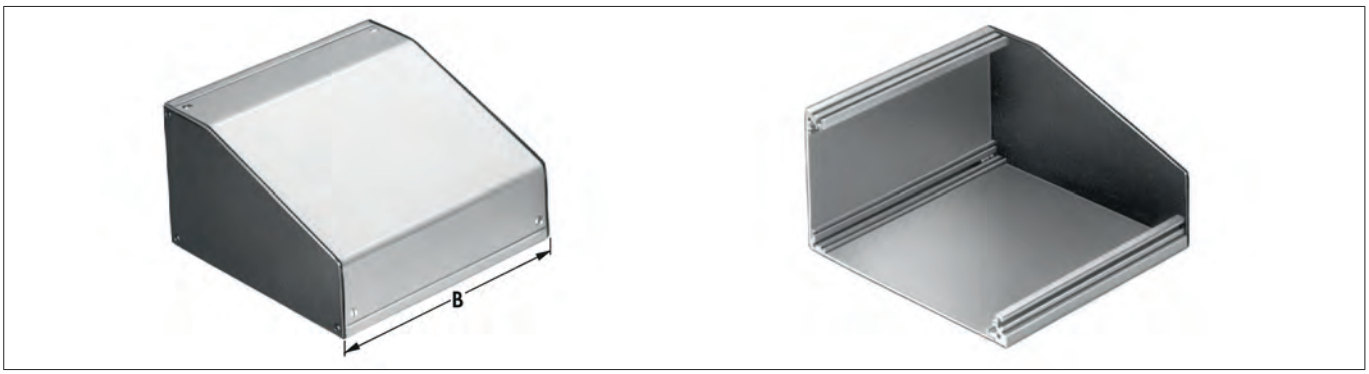



– the profiles have internal guide slots for inserting the PCBs or similar components
– supplied as demounted kit incl. cover plates and mounting material
– **assembly time:** 1-2 minutes
– **material:** aluminium profile and sheet (thickness 2 mm)
– special dimensions, drillings and surface treatments upon request

**contents of delivery:**
bottom panel natural colour anodised **(1)**
rear panel natural colour anodised **(2)**
front panel natural colour anodised **(3)**
2 side panels black anodised
2 struts extrusion with guide slots and T-grooves for M3
1 strut corner extrusion, screws, nuts

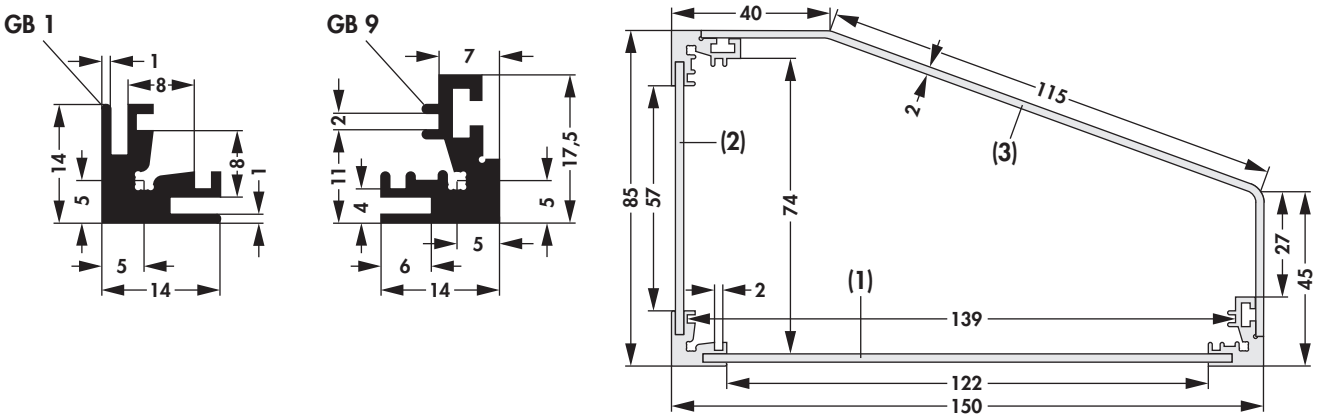


| art. no. | dim. [mm]<br>B |
|---|---|
| **PG 150 SME** | 150 |
| **PG 250 SME** | 250 |
| **PG 300 SME** | 300 |

Profile sold by the metre ➔ M 20