

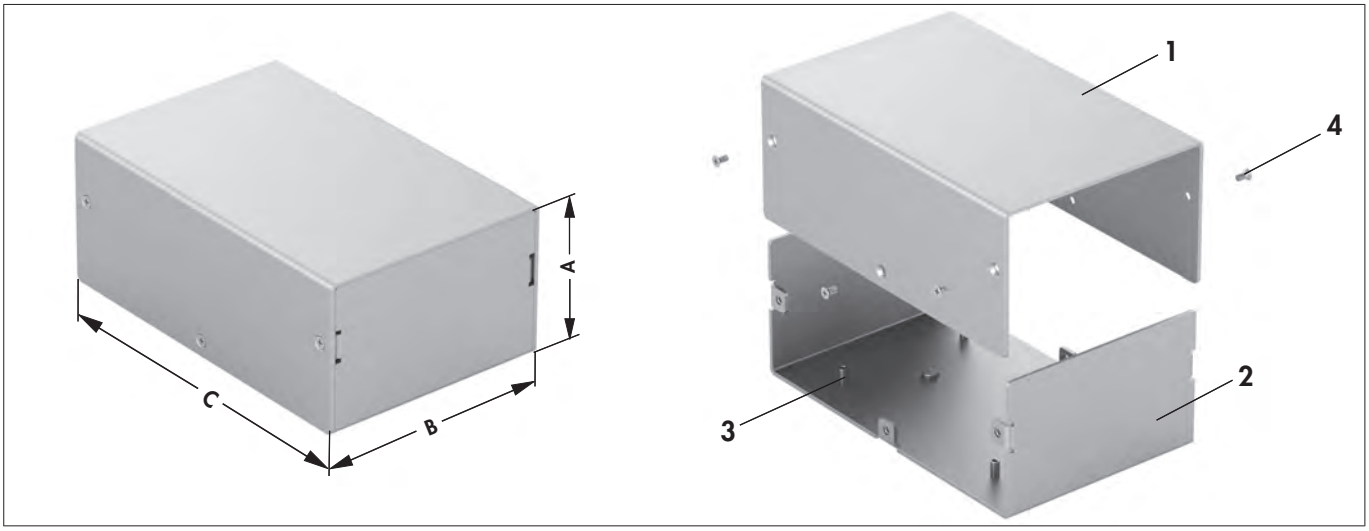


contents of delivery:
1 = upper shell; **2** = lower shell; **3** = 4 x M3 – threaded bush for PCB mounting; **4** = mounting material

- universal shell case with variable dimensions
- easy and fast mounting
- insertion of non-standardised PCBs and devices
- material thickness of the half shells 2 mm, other material thicknesses on request
- special treatments, surfaces and labelings acc. to customer specifications

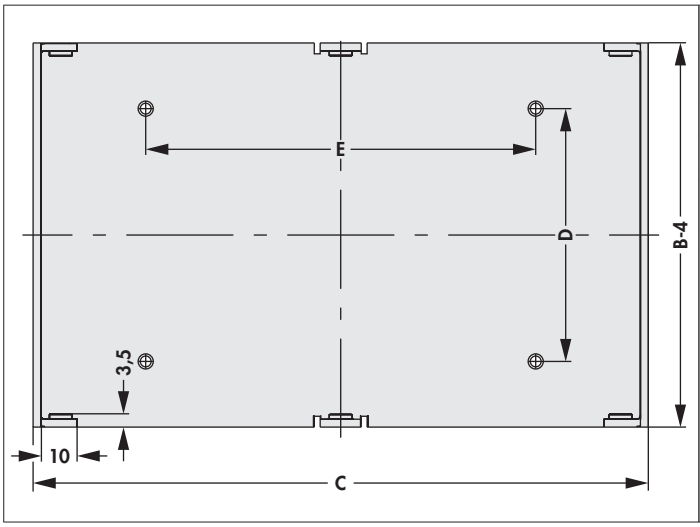

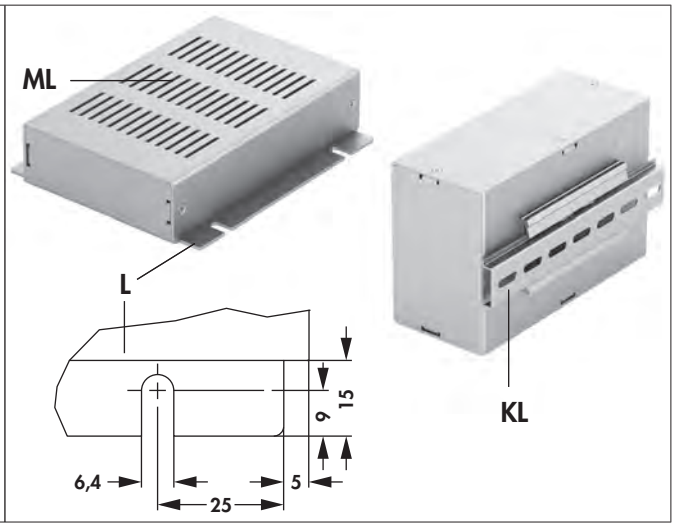

possible dimensions:

art. no.	dim. [mm]					
	A	B	C	D	E	thread sleeve height
SGV ...	max. 150	max. 250	max. 300	max. 238	max. 286	6/8/10/12/14/20

please indicate with your order:

art. no.	dim. [mm]					
	A	B	C	D	E	thread sleeve height
SGV ...						

please indicate:

... surface
SA = black anodised
ME = natural colour anodised
TP = transparent passivated


... fixing tab (optional)
L = fixing tab

... fixing of mounting rail (optional)
KL = fixing of mounting rail

... ventilation slots (optional)
ML = ventilation slots


fischer elektronik


Shell cases variable, desk version

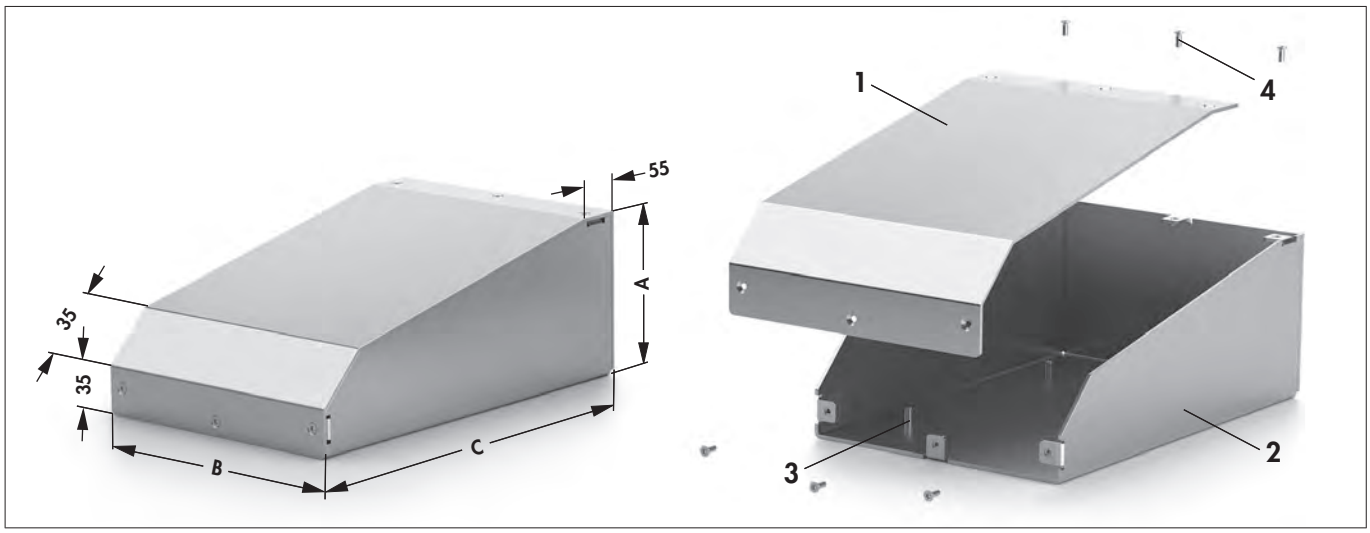

contents of delivery:
1 = upper shell; **2** = lower shell; **3** = 4 x M3 – threaded bush for PCB mounting; **4** = mounting material

- universal shell case with variable dimensions
- easy and fast mounting
- insertion of non-standardised PCBs and devices
- material thickness of the half shells 2 mm, other material thicknesses on request
- special treatments, surfaces and labelings acc. to customer specifications

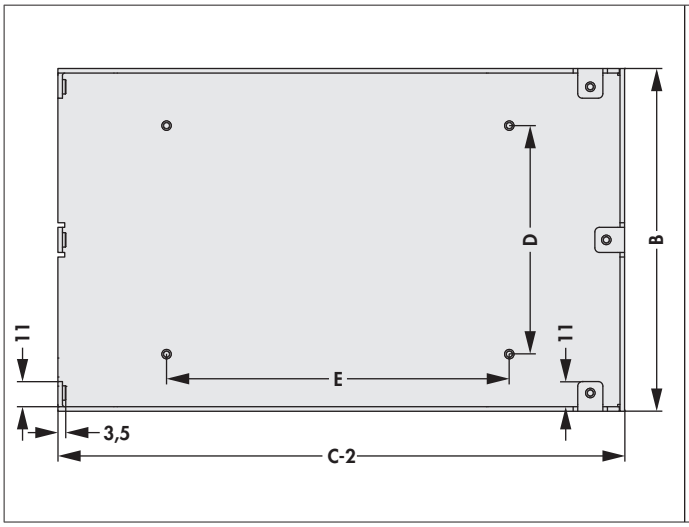

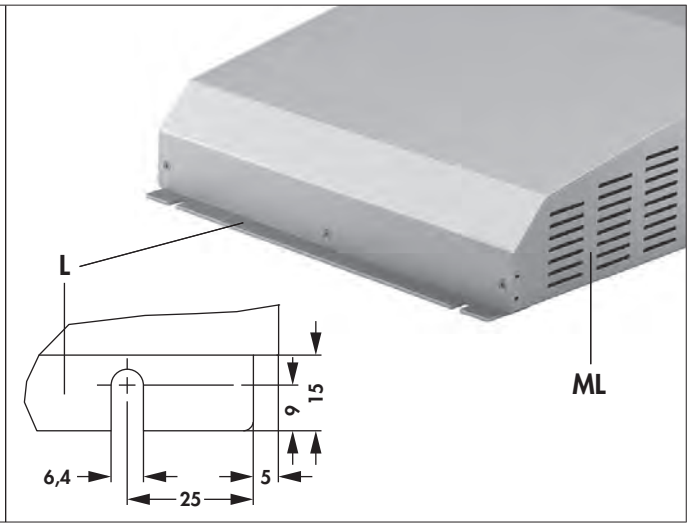

possible dimensions:

art. no.	dim. [mm]					
	A	B	C	D	E	thread sleeve height
SGV P ...	max. 200	max. 500	max. 400	max. 476	max. 376	6/8/10/12/14/20

please indicate with your order:

art. no.	dim. [mm]					
	A	B	C	D	E	thread sleeve height
SGV P ...						

please indicate:

... surface
SA = black anodised
ME = natural colour anodised
TP = transparent passivated

... ventilation slots (optional)
ML = ventilation slots

... fixing tab (optional)
L = fixing tab