

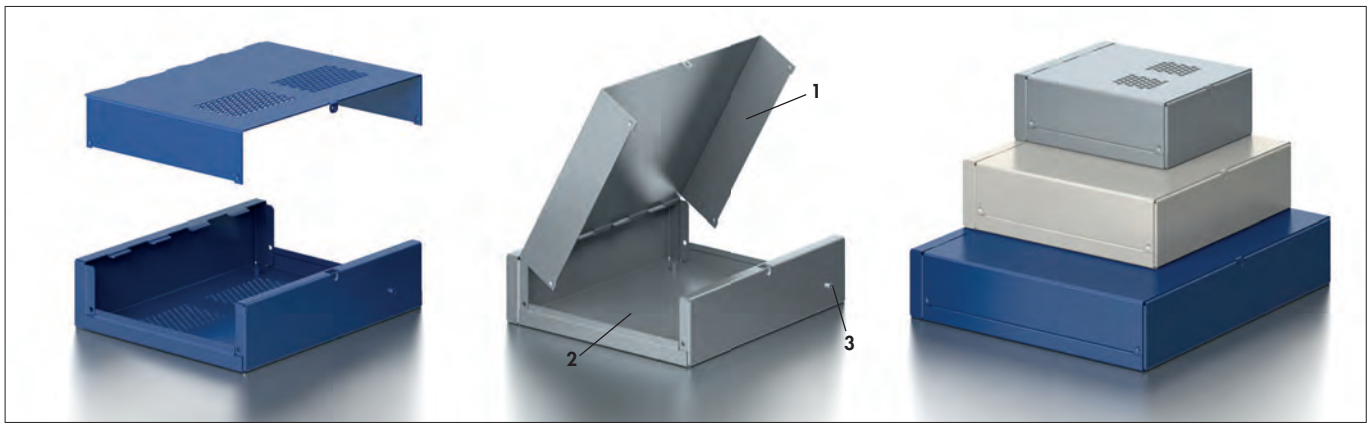


contents of delivery:
1 = 1 x top shell; **2** = 1 x bottom shell; **3** = mounting material

- universal, flexible and robust case made of 1 mm thick galvanised sheet steel
- outer surfaces matt powder-coated, available in three standard colours
- quick mounting of the top shell by means of a simple screw connection on the rear side
- M3 threaded bushes pressed into the bottom shell for mounting a PCB or mounting plate
- improved shielding against electromagnetic interference
- suitable top-hat rail clamp **KL 35 ...** on request
- optionally with ventilation slots on the top and bottom shells
- also available as customised version "**TOL SL ...**"



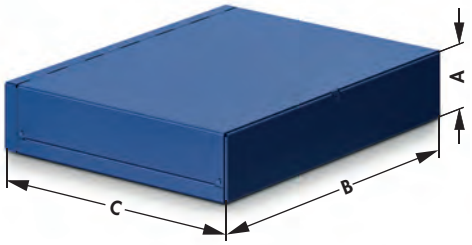

art. no.	dim. [mm] A	B	C	D	E	thread sleeve height
TOL 110 ...	44	110	120	70	80	5
TOL 170 ...		170	150	130	110	
TOL 230 ...		230	180	180	130	
TOL 290 ...	88	290	240	240	200	

possible dimensions:

art. no.	dim. [mm] A	B	C	D	E	thread sleeve height
TOL SL ...	25 ... 100	80 ... 300	80 ... 300	max. B - 20	max. C - 40	5/7/9

please indicate with your order:

art. no.	dim. [mm] A	B	C	D	E	thread sleeve height
TOL SL ...						

please indicate:
... surface
UL = ultramarine blue (sim. RAL 5002)
SG = silver grey (sim. RAL 7001)
PW = pearl white (sim. RAL 1013)
... ventilation slots (optional)
ML = ventilation slots