

## 30x4mm

### RB3004Series




# RUNDA

www.szrunda.com



DIMENSIONS DRAWING

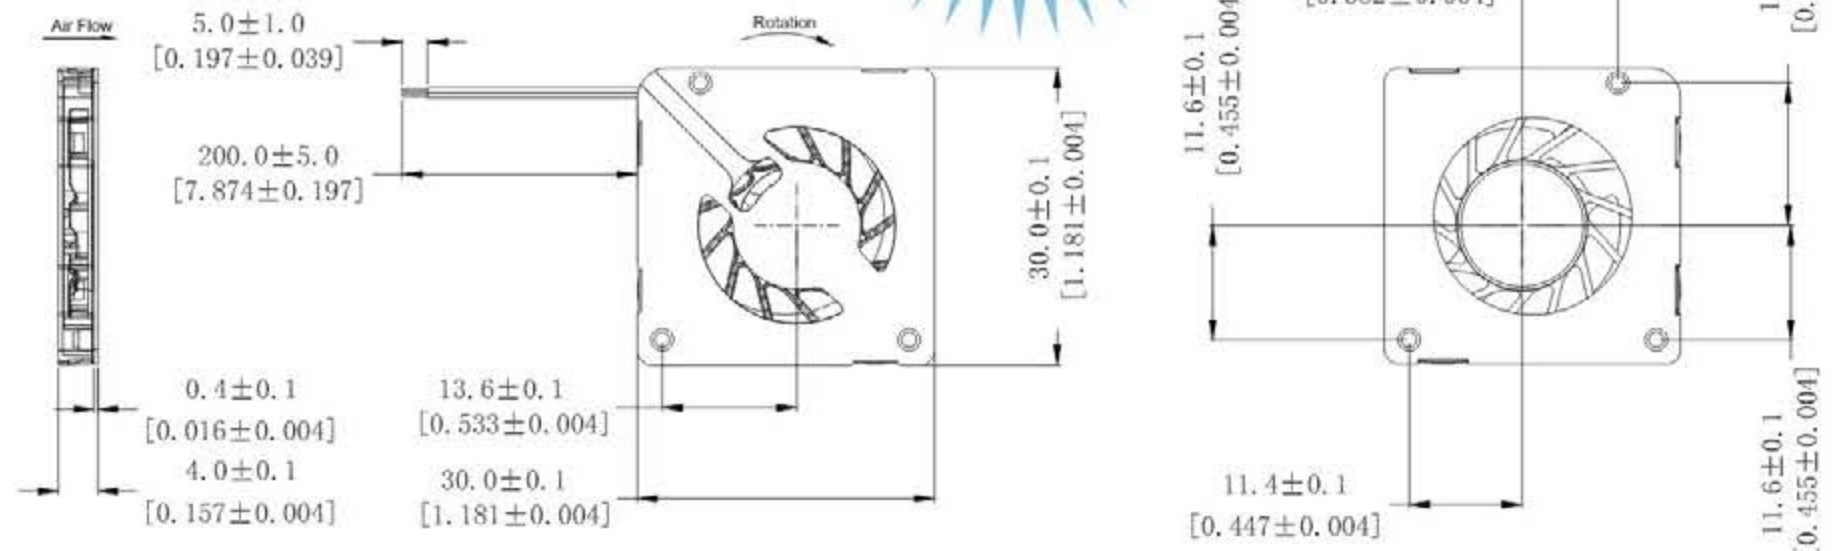

外框材质:环保防火PBT  
 Frame: Thermoplastic PBT UL94-V0  
 扇叶材质:环保防火PBT  
 Imperller: Thermoplastic PBT UL94-V0  
 轴承结构:双滚珠或长寿命含油结构  
 Bearing system: 2Ball or Long life sleeve  
 单体风扇重量:6g  
 Unit Weight:6g

#### 可选的功能参照列表 (Available Functions)

##### 1. 马达保护(Motor protection)

RP	SS	AS	CL
●	●	●	●


##### 2. 信号输出(Signal output)

FG	RD	R $\bar{D}$	LD
●	●	●	●

##### 3. 调速方式(Speed control mode)

PWM	TP	VC	RC	CS
○	○	○	○	○

Fan Performance Curve

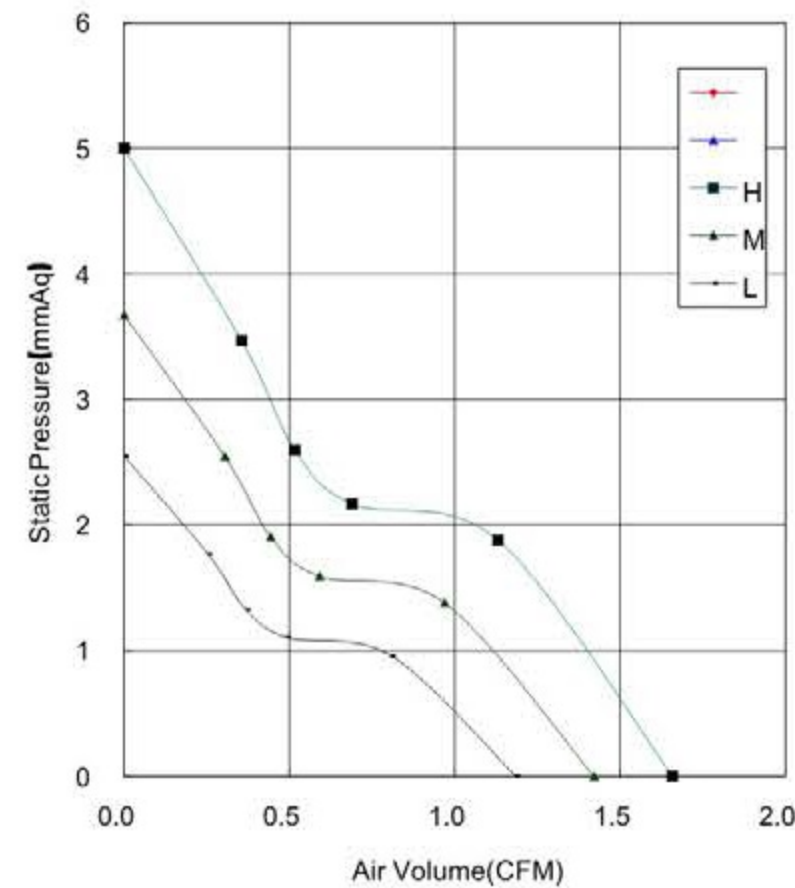

Part Number	Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air flow (Q)	Pressure (P)	Noise (dBA)
产品编号	电压范围	额定电流	功率	转速	(CFM)风量	(mmAq)风压	噪音
RB3004x05L	5 (4~6)	0.08	0.40	8500	1.18	2.55	24.3
RB3004x05M		0.10	0.50	9500	1.42	3.67	26.8
RB3004x05H		0.14	0.70	10000	1.66	5.00	29.2

★ 如果您需要的转速或电压或功能不在这份清单上, 请与我们联系。  
 If you want another rpm or voltage or functions which one is not in the list, please contact with our sales.

★ 提示1: 功能的具体信息参照产品目录前页篇章。  
 Notes1: The catalog have detail information in the front page for the functions.

★ 提示2: 产品详细信息请参照承认书。  
 Notes2: Product have a detail in the approval sheet.

★ 提示3: 产品规格变更不另行通知。  
 Notes3: Specifications are subject to change without notice.