



·EC· SFE133JAN (MS)



Dia.133x110mm/5.2x4.3inch
260CFM

Motorized Impeller, Backward curved blades

Model No	Rated Volt VAC	Voltage Range VAC	Input Power Watt	Rated Current Amp	Ref. Speed RPM	Max.Airflow CFM	m3/min	Max.Static Pressure Inch/H2O	mm	Noise Level db(A)	PQ Curves	UL
SFE133JAN11-HHHWB (MS)	115	100~120	43(~56)	-	4600	260	7.4	1.9	48.26	68		☒
SFE133JAN22-HHHWB (MS)	230	200~240	43(~56)	-	4600	260	7.4	1.9	48.26	68		☒

- ** = "WB" for wire lead type Ball bearing
- Sinwan reserves the right to change data and improve electrical & mechanical design without notice, data tolerance +-10%

Motor

Motor Type: AC-DC Energy Saving EC Motor

Burnout Protection: Electronically protected

IP Protection: IP54 (Optional)

Mechanical

Frame: Aluminum die casting motor frame

Impeller: Plastic impeller UL94-V0

Bearing: Ball bearing

Rotation: CW seen on rotor

Connection: Wire leads

Weight: 925g

Electronical

Dielectric Strength: 1400VAC/min, Max leakage 10mA

Speed Control: Optional: PWM, S/C NTC thermister

Signal Output: Optional: RD Rotation Detactor, FG Frequency Generator


Environment

Operating Temp: -20C~+65C

Storage Temp: -20C~+75C (at 65%RH)



Life Expectancy: L10 70K hours at 40C

► Performance P-Q Curves

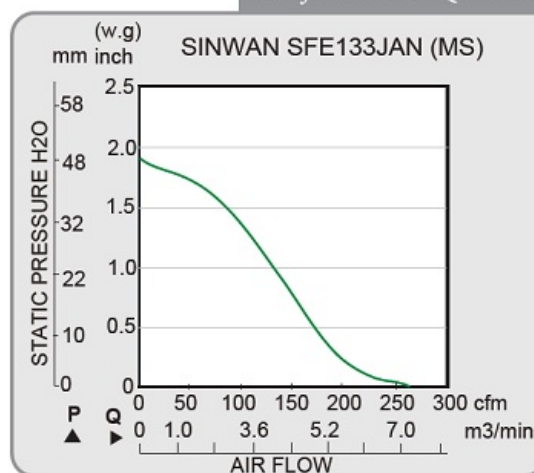

Nomenclature

► Outline Dimensions

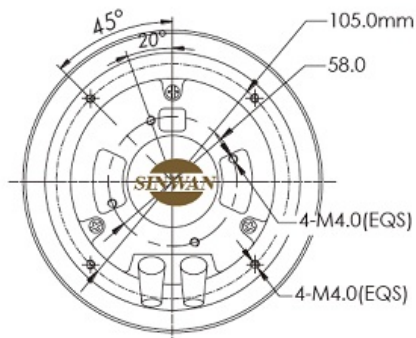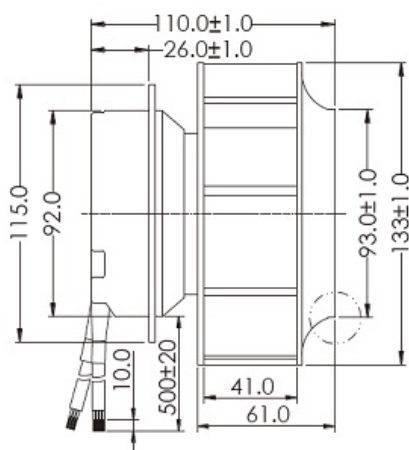

Lead wires UL2464, #20AWG
Function wires UL2464, #22AWG

Relevant products



Inlet nozzle/Duct ring
DR133SN(A)