DC AXIAL FAN

RUNDA
www.szrunda.com


60x60x25mm

RD6025-B Series



外框材质:环保防火PBT
Frame:Thermoplastic PBT UL94-V0
扇叶材质:环保防火PBT
Imperller:Thermoplastic PBT UL94-V0
轴承结构:双滚珠或长寿命含油结构
Bearing system:2Ball or Long life sleeve
单体风扇重量:58g
Unit Weight:58g

DIMENSIONS DRAWING

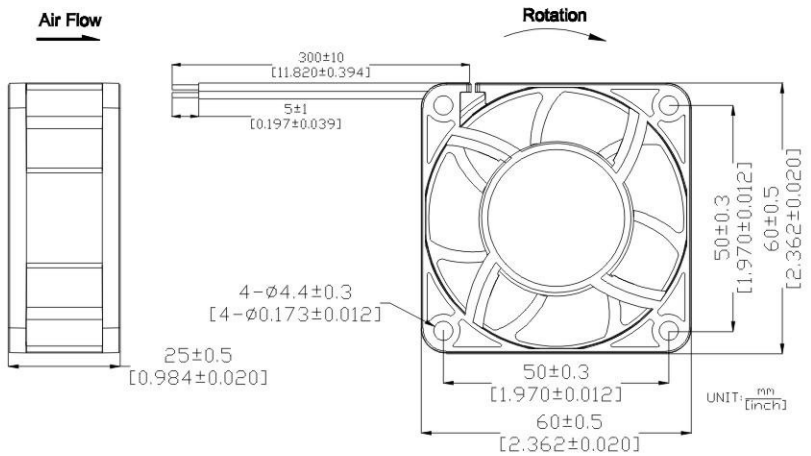

可选的功能参照列表
(Available Functions)

1.马达保护(Motor protection)

RP	SS	AS	CL
●	●	●	●


2.信号输出(Signal output)

FG	RD	RD	LD
●	●	●	●

3.调速方式(Speed control mode)

PWM	TP	VC	RC	CS
●	●	●	●	●

Fan Performance Curve

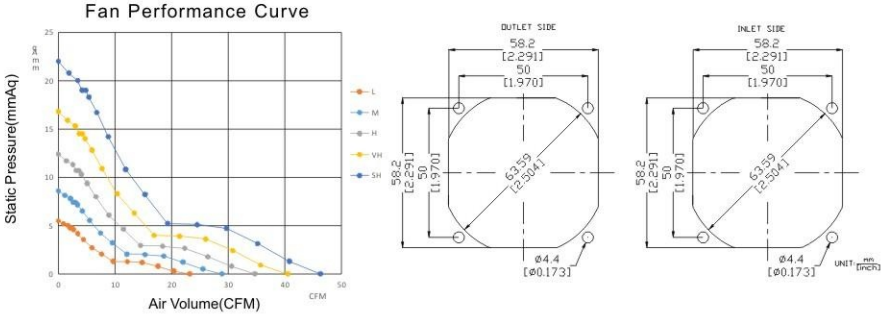

Part Number	Voltage(V)	Current(A)	Power(W)	Speed(RPM)	Air flow(Q)		Pressure(P)		Noise(dBA)
产品编号	电压范围	额定电流	功率	转速	(CFM) 风量	m^3/min	(mmAq)风压	(In H_2O)	噪音
RD6025x12L	12(7~14)	0.08	0.95	4000	23.16	0.66	5.49	0.22	32.53
RD6025x12M		0.12	1.51	5000	28.94	0.82	8.58	0.34	36.27
RD6025x12H		0.18	2.25	6000	34.73	0.98	12.36	0.49	40.74
RD6025x12VH		0.27	3.28	7000	40.52	1.15	16.82	0.66	46.46
RD6025x24L	24(15~27)	0.04	0.95	4000	23.16	0.66	5.49	0.22	32.53
RD6025x24M		0.06	1.51	5000	28.94	0.82	8.58	0.34	36.27
RD6025x24H		0.09	2.25	6000	34.73	0.98	12.36	0.49	40.74
RD6025x24VH		0.13	3.28	7000	40.52	1.15	16.82	0.66	46.46
RD6025x24SH		0.20	4.74	8000	46.31	1.31	21.97	0.86	50.31
RD6025x48L	48(35~57)	0.02	0.95	4000	23.16	0.66	5.49	0.22	32.53
RD6025x48M		0.03	1.51	5000	28.94	0.82	8.58	0.34	36.27
RD6025x48H		0.05	2.25	6000	34.73	0.98	12.36	0.49	40.74
RD6025x48VH		0.07	3.28	7000	40.52	1.15	16.82	0.66	46.46
RD6025x48SH		0.10	4.74	8000	46.31	1.31	21.97	0.86	50.31

★ 如果您需要的转速或电压或功能不在这份清单上，请与我们业务联系。
If you want another rpm or voltage or functions which one is not in the list,please contact with our sales.

★ 提示1:功能的具体信息参照产品目录前页篇章。
Notes1:The catalog have detail information in the front page for the functions.

★ 提示2:产品详细信息请参照承认书。
Notes2:Product have a detail in the approval sheet.

★ 提示3:产品规格变更不另行通知。
Notes3:Specifications are subject to change without notice.

★ 提示4:调速方式只能制作12V机型。
Note4:Speed control mode only for 12V products.

EL.ITALIA SRL
www.elitaliaweb.it
info@elitaliaweb.it
02.26261009
02.33611626