



General Purpose AC EMI Filter

El.italia EC-EA04 serie



*Image shown is for illustrative purpose only



Technical specifications

Operating voltage	120/250 VAC
Current rating	1A to 6A
Frequency	50/60Hz
Voltage drop	1 Volt max.
High potential test voltage	P -> E 1500VAC P -> N 1414VDC (applicable excluding surge suppressor filter)
Insulation resistance	≥ 300 MΩ @ 500VDC (PN→E)
Operating temperature	40°C / -25°C +85°C

Features and benefits

- | All filters provide high attenuation performance.
- | All filters compliance to EN60939-3:2015 & EN60939- 2:2005 standards.
- | Compact PCB-mountable design.
- | High reliable.
- | Plastic housing with good aesthetic.
- | Single stage.
- | Input and output connection through soldering pins.
- | Filters available in medical version without capacitor to earth.
- | With surge suppressor filters also available.
- | Cost effective solution.

Attenuation Type

Single Stage


Standard

Application


- | Electrical and electronic equipment
- | Consumer product
- | Medical equipment
- | SMPS
- | Test & measurement equipment
- | Small to medium-sized machines and household equipment
- | Office automation equipment

Mechanical details


El.italia EC-EA04 serie

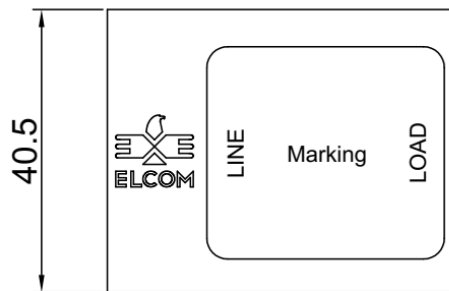


TOP VIEW

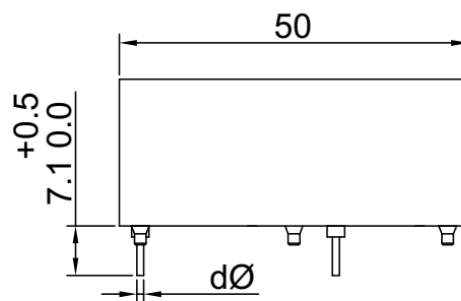

FRONT VIEW

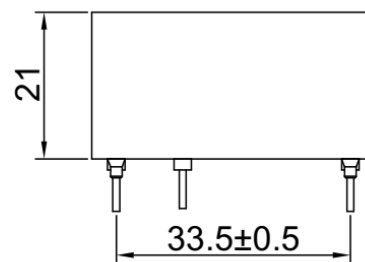


RHS VIEW

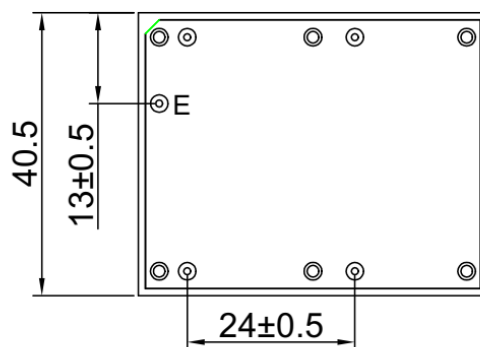

BOTTOM VIEW

PCB DRILLING DETAILS

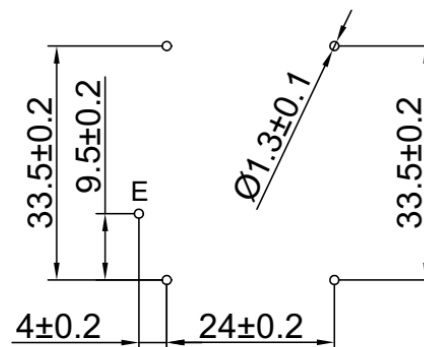

All dimensions in mm.


General tolerance=±1mm

Note: For medical application filter, earthing terminal is not provided.


Electrical schematic for filter

El.italia EC-EA04 serie


General purpose -

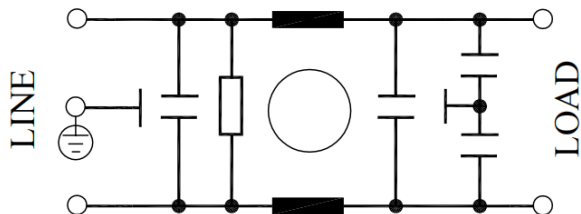


Medical equipment application -

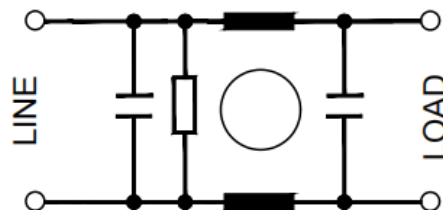

General purpose with Surge Suppressor -

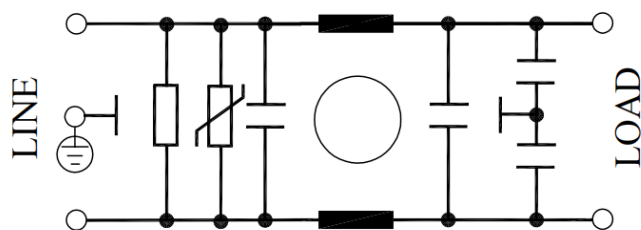

Medical equipment application with Surge Suppressor -

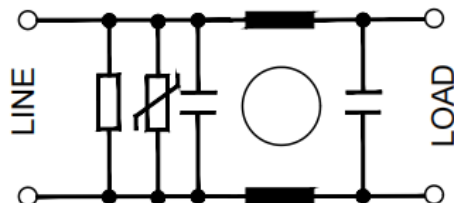


Filter attenuation graph

C = Common mode (asymmetrical) ———

D = Differential mode (symmetrical) - - - - -

For general purpose

1 Amp to 6 Amp

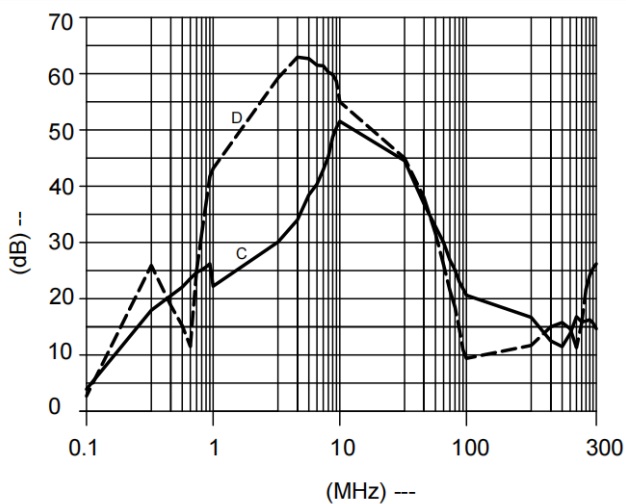

Filter Selection Table –

El.italia EC-EA04 serie

Sr. No.	Elcom part codes (ordering code)	Rated Current rating (A) @40°C	Leakage current (mA) @250VAC	Pin-type terminal 	Max. Peak current (8/20 μ sec 1 time) (KA)	Energy surge rating (10/1000 μ sec) (Joules)	Approx. weight (gm)	Attenuation
1	EF-1B001A01E-A04	1	< 0.5	A	----	----	50	Standard
2	EF-1B001A02E-A04	1	< 0.5	A	6.5	175	50	Standard
3	EF-1B001A03E-A04	1	< 0.003	A	----	----	50	Standard
4	EF-1B001A04E-A04	1	< 0.003	A	6.5	175	50	Standard
5	EF-1B002A01E-A04-A	2	< 0.5	A	----	----	50	Standard
6	EF-1B002A02E-A04	2	< 0.5	A	6.5	175	50	Standard
7	EF-1B002A03E-A04	2	< 0.003	A	----	----	50	Standard
8	EF-1B002A04E-A04	2	< 0.003	A	6.5	175	50	Standard
9	EF-1B003A01E-A04	3	< 0.5	A	----	----	50	Standard
10	EF-1B003A02E-A04	3	< 0.5	A	6.5	175	50	Standard
11	EF-1B003A03E-A04	3	< 0.003	A	----	----	50	Standard
12	EF-1B003A04E-A04	3	< 0.003	A	6.5	175	50	Standard
13	EF-1B006A01E-A04	6	< 0.5	A	----	----	50	Standard
14	EF-1B006A02E-A04	6	< 0.5	A	6.5	175	50	Standard
15	EF-1B006A03E-A04	6	< 0.003	A	----	----	50	Standard
16	EF-1B006A04E-A04	6	< 0.003	A	6.5	175	50	Standard

- Customize products provided on request.
- Maximum leakage under usual AC operating conditions (acc. IEC 60939-3). Note: if the neutral line is interrupted, worst case leakage could reach twice this level.

Connection Type

Current Rating (A)	Pin type terminal	Earthing
1,2,3,6 Amp	Solder pins	Solder pins

Syntax

El.italia EC-EA04 serie

EF – 1B CCC A YY E – A04

