

Datasheet | EB06

EP-372-F2 Series

General Purpose AC EMI Filter



El.italia EC-EB06[EP-372-F2] serie



*Image shown is for illustrative purpose only

Technical specifications

Operating voltage	120/250 VAC
Current rating	1A-10A
Frequency	50/60Hz
Voltage drop	1 Volt max.
High potential test voltage	P -> E 1500VAC P -> N 1414VDC (applicable excluding surge suppressor filter)
Insulation resistance	≥ 300 MΩ @ 500VDC (PN→E)
Operating temperature	40°C / -25°C +85°C

Features and benefits

- | All filters provide high attenuation performance.
- | All filters compliance to EN60939-3:2015 & EN60939-2:2005 standards.
- | Filter available in panel mounting provision.
- | Single stage.
- | High reliable.
- | Provision of single fuse holder.
- | CRCA metal can with nickel plating provides good aesthetic and corrosion protection.
- | Input connection through IEC 60320 C14 plug.
- | Output connection with fast-on.
- | Available with black non-illuminated switch.
- | Filters available in medical version without capacitor to earth.
- | With surge suppressor filters also available.

Attenuation Type

Single Stage

Standard

Application

- | Portable electrical and electronic equipment
- | Datacom equipment
- | Control Panel
- | Medical equipment
- | SMPS
- | Test and measurement equipment

Datasheet | EB06


EP-372-F2 Series



Mechanical details

Fast-on terminal


El.italia EC-EB06[EP-372-F2] serie

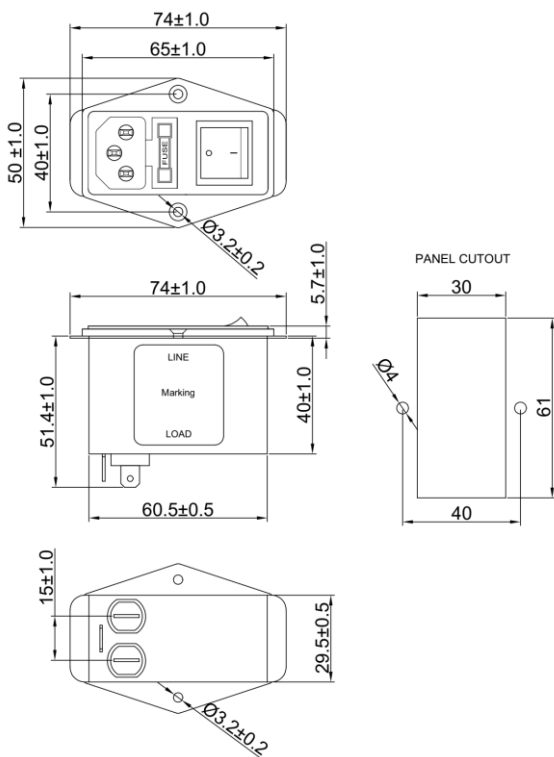


All dimensions in mm.
General tolerance $\pm 1\%$

Electrical schematic for filter


General purpose -

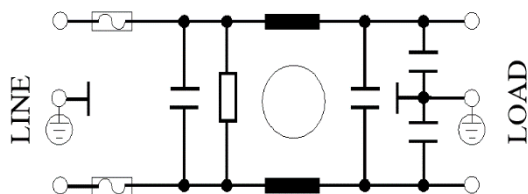


Medical equipment application -

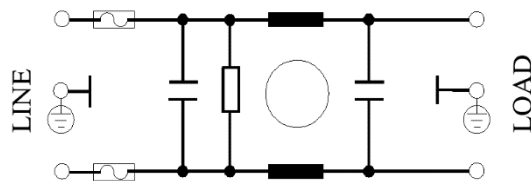

General purpose with surge suppressor -

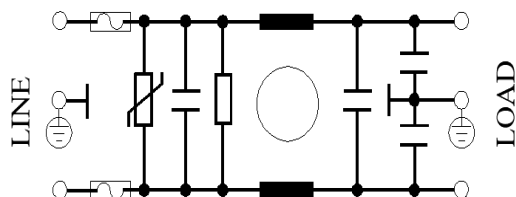

Medical equipment application with surge suppressor -

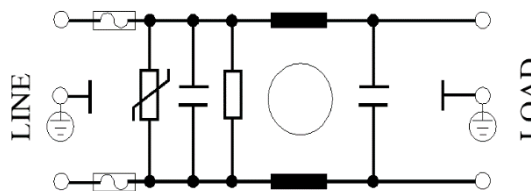

Datasheet | EB06

EP-372-F2 Series




Filter attenuation graph

El.italia EC-EB06[EP-372-F2] serie


C = Common mode (asymmetrical) _____
D = Differential mode (symmetrical) -----

For general purpose


For 1A

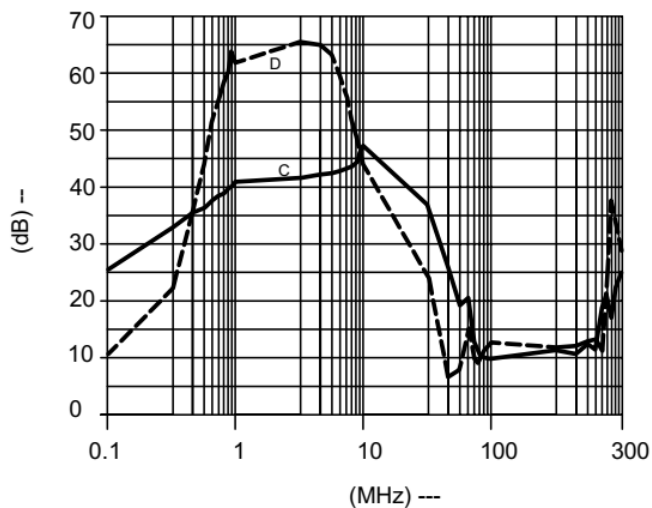


For 3A

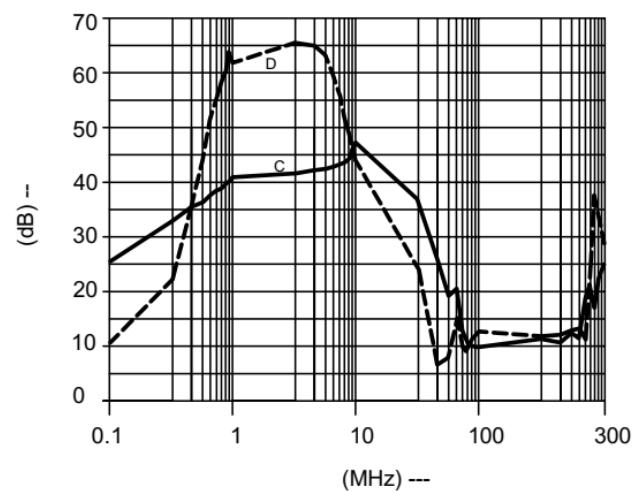

For 6A

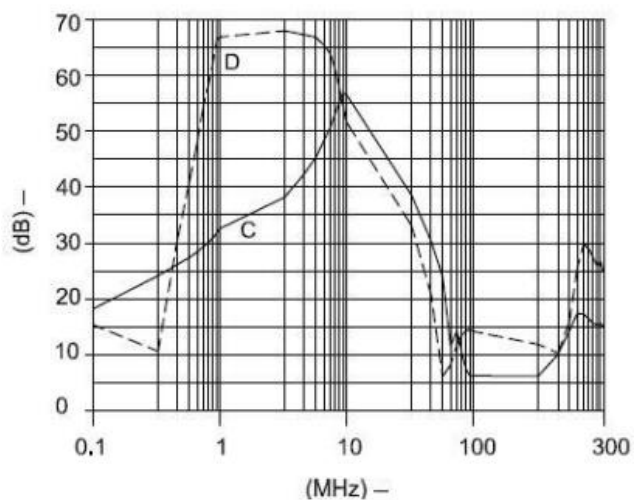

For 10A

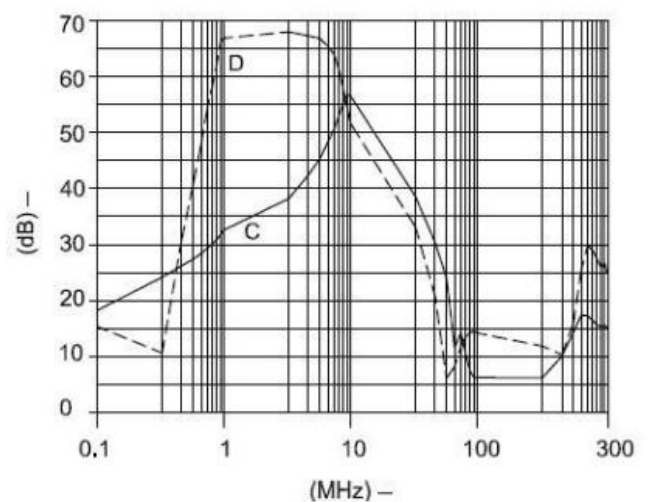

Datasheet | EB06

EP-372-F2 Series



Product Selection Table –

El.italia EC-EB06[EP-372-F2] serie

Sr. No.	Elcom part codes (ordering code)	Rated Current rating (A) @40°C	Leakage current (mA) @250VA C	Terminal Fast-on 	Max. Peak current (8/20 μ sec 1 time) (KA)	Energy surge rating (10/1000 μ sec) (Joules)	Approx. weight (gm)	Attenuation
1	EF-1B001B01E-B06	1	< 0.5	B	----	----	150	Standard
2	EF-1B001B02E- B06	1	< 0.5	B	6.5	175	150	Standard
3	EF-1B001B03E- B06	1	< 0.003	B	----	----	150	Standard
4	EF-1B001B04E- B06	1	< 0.003	B	6.5	175	150	Standard
5	EF-1B003B01E- B06	3	< 0.5	B	----	----	150	Standard
6	EF-1B003B02E- B06	3	< 0.5	B	6.5	175	150	Standard
7	EF-1B003B03E- B06	3	< 0.003	B	----	----	150	Standard
8	EF-1B003B04E- B06	3	< 0.003	B	6.5	175	150	Standard
9	EF-1B006B01E- B06	6	< 0.5	B	----	----	150	Standard
10	EF-1B006B02E- B06	6	< 0.5	B	6.5	175	150	Standard
11	EF-1B006B03E- B06	6	< 0.003	B	----	----	150	Standard
12	EF-1B006B04E- B06	6	< 0.003	B	6.5	175	150	Standard
13	EF-1B010B01E- B06	10	< 0.5	B	----	----	150	Standard
14	EF-1B010B02E- B06	10	< 0.5	B	6.5	175	150	Standard
15	EF-1B010B03E- B06	10	< 0.003	B	----	----	150	Standard
16	EF-1B010B04E- B06	10	< 0.003	B	6.5	175	150	Standard

- Maximum leakage under usual AC operating conditions (acc. IEC 60939-3). Note: if the neutral line is interrupted, worst case leakage could reach twice this level.
- Customize products provided on request.

Datasheet | EB06

EP-372-F2 Series



Connection Type

El.italia EC-EB06[EP-372-F2] serie

Current rating (A)	Input	Output
1, 3,6 & 10	IEC 60320 compatible plug	Fast -on 6.3 X 0.8mm

Syntax

EF – 1B CCC B YY E - B06

