

Datasheet | EB08

EP-361-F2 Series



General Purpose AC EMI Filter

El.italia EC-EB08[EP-361-F2] serie



Image shown is for illustrative purpose only

Technical specifications

Operating voltage	120/250 VAC
Current rating	1A-10A
Frequency	50/60Hz
Voltage drop	1 Volt max.
High potential test voltage	P -> E 1500VAC P -> N 1414VDC (applicable for excluding surge suppressor filter)
Insulation resistance	$\geq 300 \text{ M}\Omega @ 500\text{VDC (PN} \rightarrow \text{E)}$
Operating temperature	40°C / -25°C +85°C

Features and benefits

- | All filters provide high attenuation performance.
- | All filters compliance to EN60939-3:2015 & EN60939-2:2005 standards
- | Filter available in panel mounting provision with deep drawn metal can.
- | High reliable
- | CRCA metal can with nickel plating provides good aesthetic and corrosion protection
- | Provides double fuse protection.
- | Input connection through IEC 60320 C14 plug
- | Have choice to select output connection type.
- | Filters available in medical version without capacitor to earth.
- | With surge suppressor filters also available.

Attenuation Type

Single Stage

Standard

Applications

- | Consumer product
- | Defence application
- | Medical equipment
- | Industrial application
- | Electrical automation equipment
- | Test and measurement equipment

Datasheet | EB08


EP-361-F2 Series



Mechanical details


El.italia EC-EB08[EP-361-F2] serie

| For Fast-on terminal

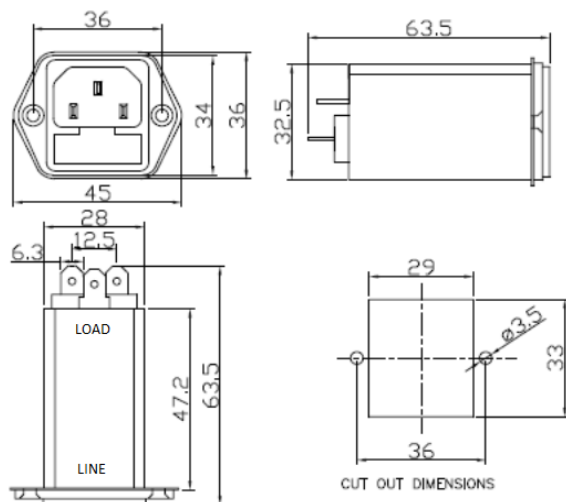

All dimensions are in mm


| For wire terminal

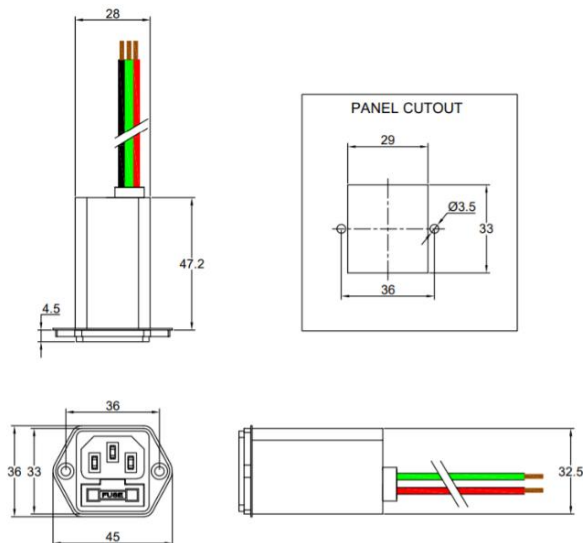


All dimensions are in mm

Electrical schematic


General Purpose -

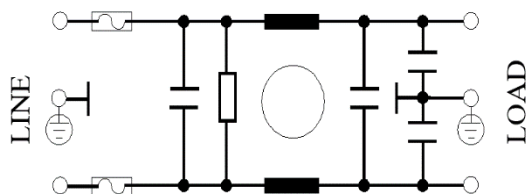


Medical equipment application -

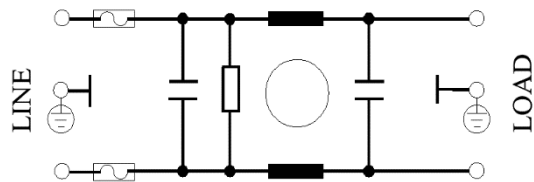

General Purpose with Surge Suppressor -

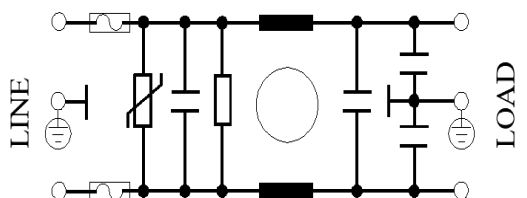

Medical equipment application with Surge Suppressor -

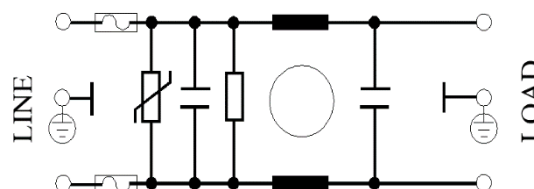

Datasheet | EB08

EP-361-F2 Series







El.italia EC-EB08[EP-361-F2] serie

Filter attenuation Graph

C = Common mode (asymmetrical) -----

D = Differential mode (symmetrical) -----

For General purpose

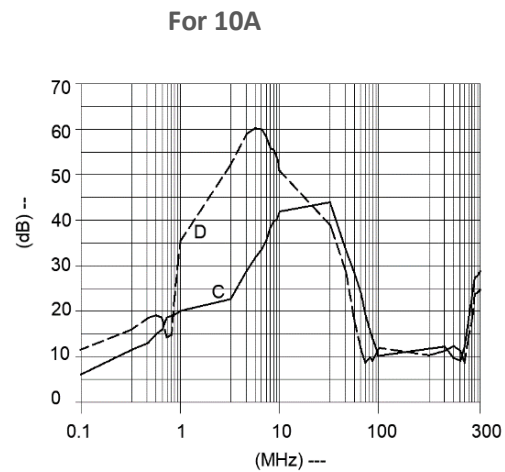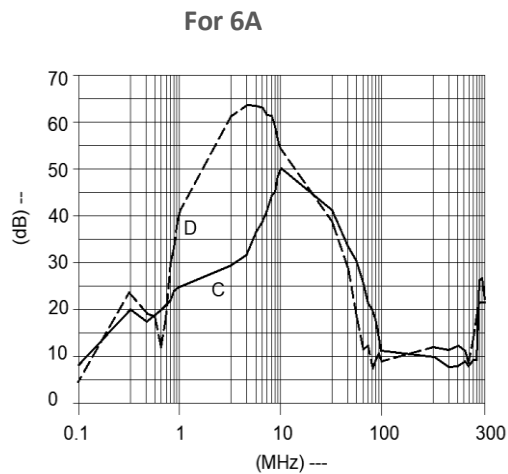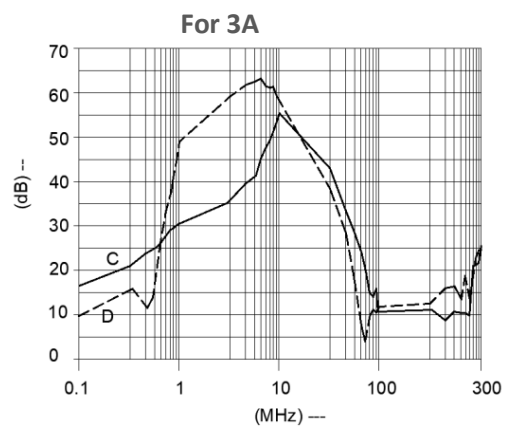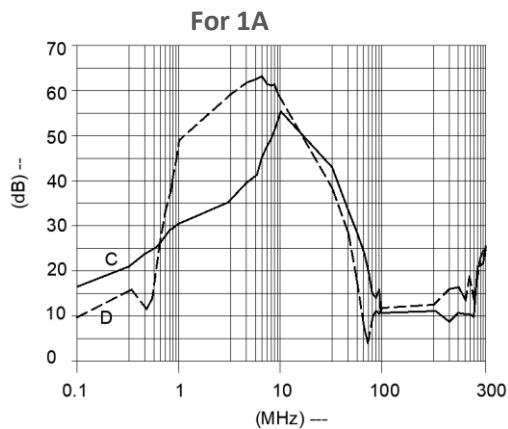

Datasheet | EB08

EP-361-F2 Series



Filter selection table

El.italia EC-EB08[EP-361-F2] serie

Sr. No.	Elcom part codes (ordering code)	Rated Current rating (A) @40°C	Leakage current (mA) @250VAC	Terminals (X)		Max. Peak current (8/20 μ sec 1 time) (KA)	Energy surge rating (10/1000 μ sec) (Joules)	Approx. Weight (gm)	Attenuation
				Fast-on 	Wire 				
1	EF-1B001X01E-B08	1	< 0.5	B	G	----	----	85	Standard
2	EF-1B001X02E-B08	1	< 0.5	B	G	6.5	175	85	Standard
3	EF-1B001X03E-B08	1	< 0.003	B	G	----	----	85	Standard
4	EF-1B001X04E-B08	1	< 0.003	B	G	6.5	175	85	Standard
5	EF-1B003X01E-B08	3	< 0.5	B	G	----	----	85	Standard
6	EF-1B003X02E-B08	3	< 0.5	B	G	6.5	175	85	Standard
7	EF-1B003X03E-B08	3	< 0.003	B	G	----	----	85	Standard
8	EF-1B003X04E-B08	3	< 0.003	B	G	6.5	175	85	Standard
9	EF-1B006X01E-B08-A	6	< 0.5	B	G	----	----	85	Standard
10	EF-1B006X02E-B08	6	< 0.5	B	G	6.5	175	85	Standard
11	EF-1B006X03E-B08	6	< 0.003	B	G	----	----	85	Standard
12	EF-1B006X04E-B08	6	< 0.003	B	G	6.5	175	85	Standard
13	EF-1B010X01E-B08	10	< 0.5	B	G	----	----	85	Standard
14	EF-1B010X02E-B08	10	< 0.5	B	G	6.5	175	85	Standard
15	EF-1B010X03E-B08	10	< 0.003	B	G	----	----	85	Standard
16	EF-1B010X04E-B08	10	< 0.003	B	G	6.5	175	85	Standard

- To compile complete part number, replace the 'X' with required output connection terminal. (e.g. EF-1B001B01E-B08)
- For fast-on terminal product have 6.3 X 0.8mm earthing terminal and for wire leads product have wired earthing.
- Customize products provided on request.

Datasheet | EB08

EP-361-F2 Series



Connection Type

El.italia EC-EB08[EP-361-F2] serie

Current Rating (A)	Fast -on	Wire	Earthing
1,3 & 6	6.3 X 0.8mm	18AWG	Fast-on/wire leads-
10		14AWG	

Syntax

EF - 1B CCC X YY Z - B08

