


R3-28C

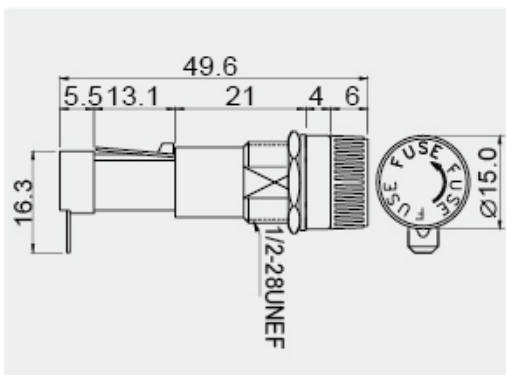

(4.8mm)0.187"
Quick connect

15A 250V AC
 4.5mm MAX

FEATURES:

- Material:
Frame and cap: PBT(UL flame: 94V-0).
Terminal: tin plated brass.
- Mounted by nut.

CAP


FUSE

Screw type

Ø 6.35*30mm

Ø 6.35*31.8mm

CUT-OUT



RoHS COMPLIANT		PROJ.		P/N:	SI-R3-28C		El.italia srl		Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy	
SCALE:	FIT	TOLERANCE		TITLE:						info@elitaliaweb.it
UNIT:	MM	LINEAR	ANGLE		FUSE HOLDER AC RATING PANEL MOUNT		www.elitaliaweb.it			
SIZE:	A4	X. ± 1	X.° ± 5°	SHIN CHIN INDUSTRIAL CO., LTD.			www.contenitoriplastici.it			
REV:	A	.X ± 0.38	.X° ± 2°							
DATE:		.XX ± 0.25	.XX° ± 1°							
SHEET:	1/1	.XXX ± 0.10								