


R3-32 A

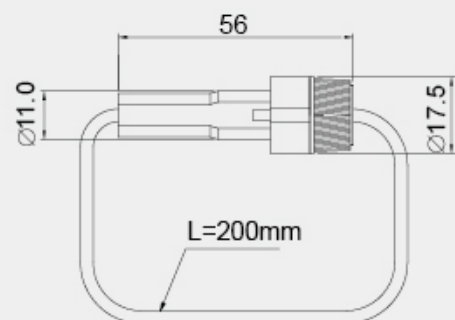

WIRE

FUSE

A $\varnothing 5.2 \times 20\text{mm}$

B $\varnothing 6.35 \times 30\text{mm}$
 $\varnothing 6.35 \times 31.8\text{mm}$

RATING

1 20A 32V DC
20A 250V AC

2 15A 32V DC
15A 250V AC

WIRE GAUGE

12AWG

14AWG

FEATURES:

- Material:
Frame and cap: phenolic(UL flame: 94V-1).
- Wire end stripped or uncut is optional.

RoHS COMPLIANT		PROJ.		P/N:	SI-R3-32(A)(B)A(1)(2)		El.italia srl Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy info@elitaliaweb.it www.elitaliaweb.it www.contenitoriplastici.it	
SCALE:	FIT	TOLERANCE		TITLE:	IN-LINE FUSE HOLDER			
UNIT:	MM	LINEAR	ANGLE					
SIZE:	A4	X. ± 1	X. ° ± 5°					
REV:	A	.X ± 0.38	.X ° ± 2°					
DATE:		.XX ± 0.25	.XX ° ± 1°	SHIN CHIN INDUSTRIAL CO., LTD.				
SHEET:	1/1	.XXX ± 0.10						