


R3-44 A



 (4.8mm)0.187"
Quick connect

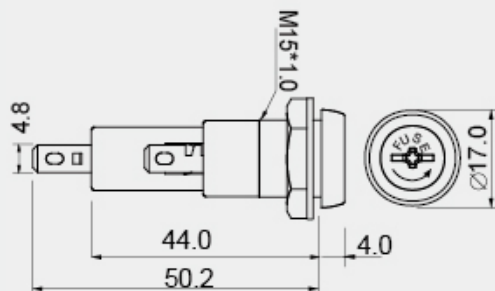

15A 250V AC

 0.5~4.0mm

FEATURES:

- Material:
Frame: phenolic(UL flame: 94V-1).
Cap: PBT(UL flame: 94V-0).
Terminal: tin plated brass.
- Mounted by nut.
- Metal or plastic nut is optional.

A

CAP

Bayonet type
(tool release)



FUSE 

Ø 6.35*30mm
Ø 6.35*31.8mm



B

Bayonet type
(tool release)



Ø 5.0*20mm



C


Screw type
(tool release)



Ø 6.35*30mm
Ø 6.35*31.8mm



CUT-OUT



RoHS COMPLIANT		PROJ.		P/N:	R3-44(A)(B)(C)A		El.italia srl  Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy	
SCALE:	FIT	TOLERANCE		TITLE:	FUSE HOLDER AC RATING PANEL MOUNT			
UNIT:	MM	LINEAR	ANGLE	SHIN CHIN INDUSTRIAL CO., LTD.				
SIZE:	A4	X. ± 1	X. ° ± 5°					
REV:	A	.X ± 0.38	.X ° ± 2°					
DATE:		.XX ± 0.25	.XX ° ± 1°					
SHEET:	1/1	.XXX ± 0.10						