
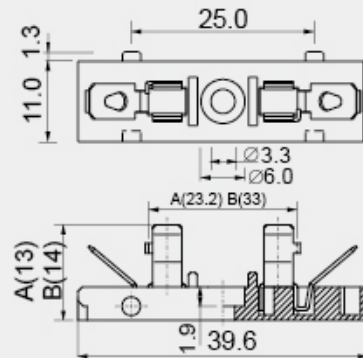


# R3-45



(4.8mm)0.187"  
Quick connect

## FEATURES:

- Material:  
Frame: PBT(UL flame: 94V-0).  
Terminal: nickel plated brass.
- This fuse holder can string array.
- Mounted by screws.

A

## RATING

8A 125/250V AC

## FUSE



Ø 5.0\*20mm

B

15A 125V AC  
10A 250V AC

Ø 6.35\*30mm

Ø 6.35\*31.8mm

## FEATURE:



Mounted with a M3 screw

|                |     |             |           |                                                 |                                |  |                                                                                   |                                                                         |  |
|----------------|-----|-------------|-----------|-------------------------------------------------|--------------------------------|--|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------|--|
| RoHS COMPLIANT |     | PROJ.       |           | P/N:                                            | SI-R3-45                       |  | <b>El.italia srl</b><br>Via IV Novembre 72, 20019<br>Settimo Milanese (MI), Italy | info@elitaliaweb.it<br>www.elitaliaweb.it<br>www.contenitoriplastici.it |  |
| SCALE:         | FIT | TOLERANCE   |           | TITLE:<br><br>FUSE HOLDER AC RATING SCREW MOUNT |                                |  |                                                                                   |                                                                         |  |
| UNIT:          | MM  | LINEAR      | ANGLE     |                                                 |                                |  |                                                                                   |                                                                         |  |
| SIZE:          | A4  | X. ± 1      | X.° ± 5°  |                                                 | SHIN CHIN INDUSTRIAL CO., LTD. |  |                                                                                   |                                                                         |  |
| REV:           | A   | .X ± 0.38   | .X° ± 2°  |                                                 |                                |  |                                                                                   |                                                                         |  |
| DATE:          |     | .XX ±0.25   | .XX° ± 1° |                                                 |                                |  |                                                                                   |                                                                         |  |
| SHEET:         | 1/1 | .XXX ± 0.10 |           |                                                 |                                |  |                                                                                   |                                                                         |  |