


R3-46 A

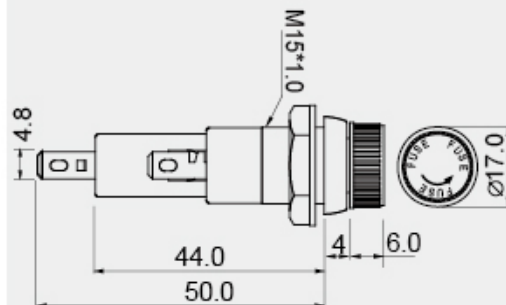

(4.8mm)0.187"
Quick connect

15A 250V AC

0.5~ 4.5mm

FEATURES:

- Material:
Frame: phenolic(UL flame: 94V-1).
Cap: PBT(UL flame: 94V-0).
Terminal: tin plated brass.
- Mounted by nut.
- Metal or plastic nut is optional.

A

CAP

Bayonet type

FUSE

Ø 6.35*30mm
Ø 6.35*31.8mm



B

Bayonet type

Ø 5.0*20mm




C

Screw type

Ø 6.35*30mm
Ø 6.35*31.8mm



CUT-OUT



RoHS COMPLIANT		PROJ.		P/N:	SI-R3-46(A)(B)(C)A		El.italia srl Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy		
SCALE:	FIT	TOLERANCE		TITLE:	FUSE HOLDER AC RATING PANEL MOUNT				
UNIT:	MM	LINEAR	ANGLE	SHIN CHIN INDUSTRIAL CO., LTD.					
SIZE:	A4	X. ± 1	X. ° ± 5°						
REV:	A	.X ± 0.38	.X ° ± 2°						
DATE:		.XX ± 0.25	.XX ° ± 1°						
SHEET:	1/1	.XXX ± 0.10				info@elitaliaweb.it www.elitaliaweb.it www.contenitoriplastici.it			