


R3-49

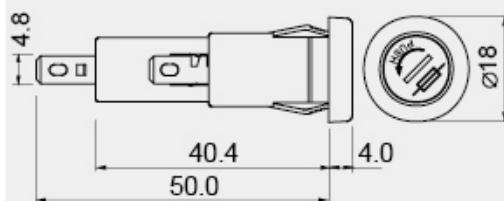

(4.8mm)0.187"
Quick connect

10A 250V AC
 0.7 ~ 2.5mm

FEATURES:

- Material:
Frame: nylon(UL flame: 94V-2).
Cap: PBT(UL flame: 94V-0)
Terminal: tin plated brass.
- Snap-in mounting, easy to install fuse holder into panel.

A

CAP

Bayonet type
(tool release)

FUSE




Ø 6.35*30mm
Ø 6.35*31.8mm

C

Screw type
(tool release)

Ø 6.35*30mm
Ø 6.35*31.8mm

CUT-OUT



RoHS COMPLIANT		PROJ.		P/N:	SI-R3-49(A)(C)		El.italia srl  Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy  info@elitaliaweb.it  www.elitaliaweb.it  www.contenitoriplastici.it	 EL.ITALIA
SCALE:	FIT	TOLERANCE		TITLE:	FUZE HOLDER AC RATING PANEL MOUNT			
UNIT:	MM	LINEAR	ANGLE					
SIZE:	A4	X. ± 1	X. ° ± 5°					
REV:	A	.X ± 0.38	.X ° ± 2°					
DATE:		.XX ± 0.25	.XX ° ± 1°	SHIN CHIN INDUSTRIAL CO., LTD.				
SHEET:	1/1	.XXX ± 0.10						