


R3-61

IP56

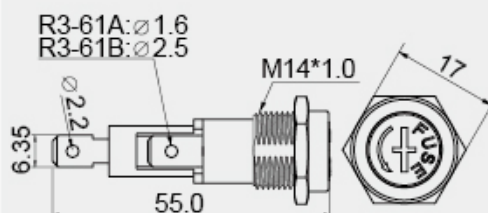

 (6.4mm)0.250"
Quick connect

10A 250V AC

FEATURES:

- Material:
Frame: PC (UL flame: 94V-2).
Cap: PBT (UL flame: 94V-0).
Terminal: nickel plated brass.
- Mounted by nut.

A

Ø 1.6 mm

B

Ø 2.5 mm

CAP


Screw type
(tool release)

FUSE 

Ø 6.35*30mm

Ø 6.35*31.8mm

CUT-OUT



RoHS COMPLIANT		PROJ.		P/N:	R3-61(A)(B)_AC		El.italia srl  Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy  info@elitaliaweb.it  www.elitaliaweb.it  www.contenitoriplastici.it	
SCALE:	FIT	TOLERANCE		TITLE:				
UNIT:	MM	LINEAR	ANGLE		FUSE HOLDER AC RATING PANEL MOUNT			
SIZE:	A4	X. ± 1	X. ° ± 5°			SHIN CHIN INDUSTRIAL CO., LTD.		
REV:	A	.X ± 0.38	.X ° ± 2°					
DATE:		.XX ± 0.25	.XX ° ± 1°					
SHEET:	1/1	.XXX ± 0.10						