


DC Rating

R3-61

IP56



(6.4mm)0.250"
Quick connect

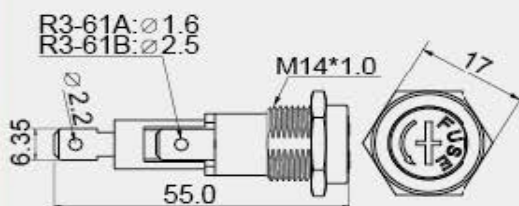

10A 12V DC

FEATURES:

- Material:
Frame: PC (UL flame: 94V-2).
Cap: PBT (UL flame: 94V-0).
Terminal: nickel plated brass.
- Mounted by nut.

A
B

TERMINAL HOLE

$\varnothing 1.6$ mm

$\varnothing 2.5$ mm

CAP


Screw type
(tool release)

FUSE

$\varnothing 6.35 \times 30$ mm

$\varnothing 6.35 \times 31.8$ mm

CUT-OUT



RoHS COMPLIANT		PROJ.		P/N:	SI-R3-61(A)(B)_DC		El.italia srl Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy	
SCALE:	FIT	TOLERANCE		TITLE:	FUSE HOLDER DC RATING PANEL MOUNT			
UNIT:	MM	LINEAR	ANGLE		SHIN CHIN INDUSTRIAL CO., LTD.			
SIZE:	A4	X. ± 1	X.° ± 5°					
REV:	A	.X ± 0.38	.X° ± 2°					
DATE:		.XX ± 0.25	.XX° ± 1°					
SHEET:	1/1	.XXX ± 0.10						