


R3-98

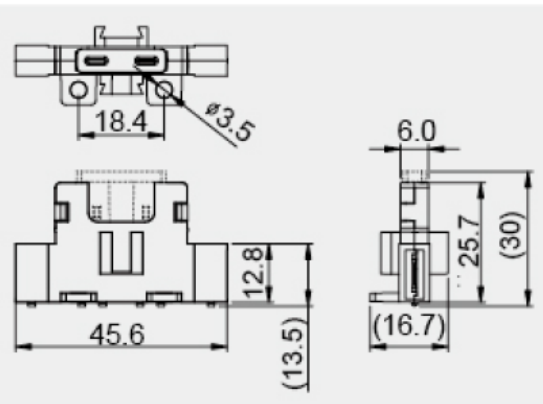

 (6.4mm)0.250"
Quick connect

32V DC

FEATURES:


- Material:
Frame: nylon(UL flame: 94V-0).
Terminal: brass.
- Input terminal rating: 0.25" terminal (30A max).
- Output terminal rating: 0.25" terminal (30A max).
- Side stackable for multiple block configurations.
- unavailable in UK, Netherland, Belgium and Luxemburg markets.

FUSE



ATO / ATC BLADE FUSE

CUT-OUT



RoHS COMPLIANT		PROJ.		P/N:	SI-R3-98		El.italia srl  Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy  info@elitaliaweb.it  www.elitaliaweb.it  www.contenitoriplastici.it 
SCALE:	FIT	TOLERANCE		TITLE:			
UNIT:	MM	LINEAR	ANGLE		FUSE HOLDER DC RATING SCREW MOUNT		
SIZE:	A4	X. ± 1	X. ° ± 5°	SHIN CHIN INDUSTRIAL CO., LTD.			
REV:	A	.X ± 0.38	.X ° ± 2°				
DATE:		.XX ± 0.25	.XX ° ± 1°				
SHEET:	1/1	.XXX ± 0.10					