


R3-9

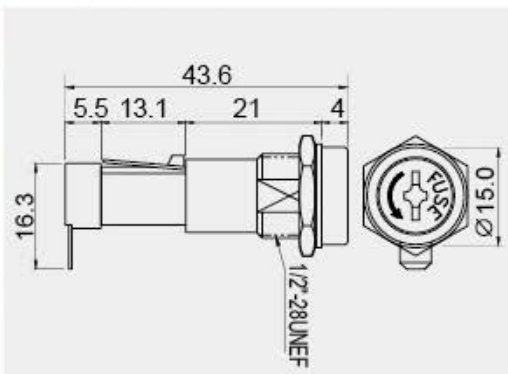

A
B
C
C O

(4.8mm)0.187"
Quick connect

0.5~4.5mm MAX


FEATURES:

- Material:
Frame and cap: PBT(UL flame: 94V-0).
Terminal: tin plated brass.
- Mounted by nut.
- Metal or plastic nut is optional.

CAP	FUSE	RATING
Bayonet type (tool release)	Ø6.35*30mm Ø6.35*31.8mm	15A 250V AC
Bayonet type (tool release)	Ø5.0*20mm	10A 250V AC
Screw type (tool release)	Ø6.35*30mm Ø6.35*31.8mm	15A 250V AC
Screw type (tool release)	Ø6.35*30mm Ø6.35*31.8mm	15A 250V AC



CUT-OUT



RoHS COMPLIANT		PROJ.		P/N:	SI-R3-9(A)(B)(C)(CO)		El.italia srl Via IV Novembre 72, 20019 Settimo Milanese (MI), Italy info@elitaliaweb.it www.elitaliaweb.it www.contenitoriplastici.it	
SCALE:	FIT	TOLERANCE		TITLE:	FUSE HOLDER AC RATING PANEL MOUNT			
UNIT:	MM	LINEAR	ANGLE					
SIZE:	A4	X. ± 1	X. ° ± 5°					
REV:	A	.X ± 0.38	.X ° ± 2°					
DATE:		.XX ± 0.25	.XX ° ± 1°	SHIN CHIN INDUSTRIAL CO., LTD.				
SHEET:	1/1	.XXX ± 0.10						