
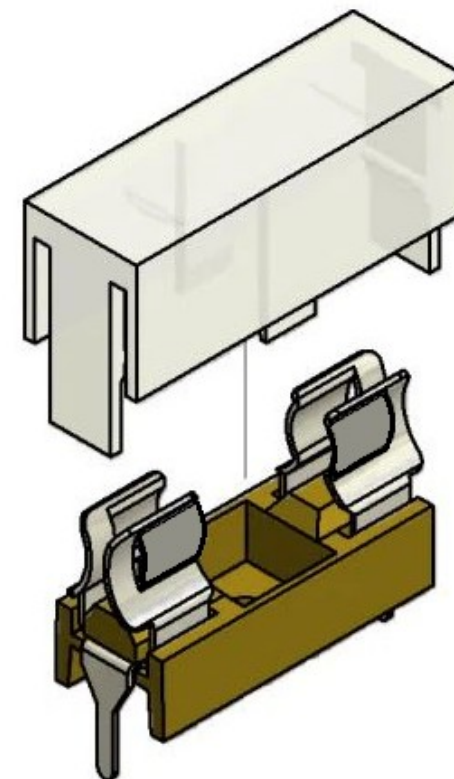


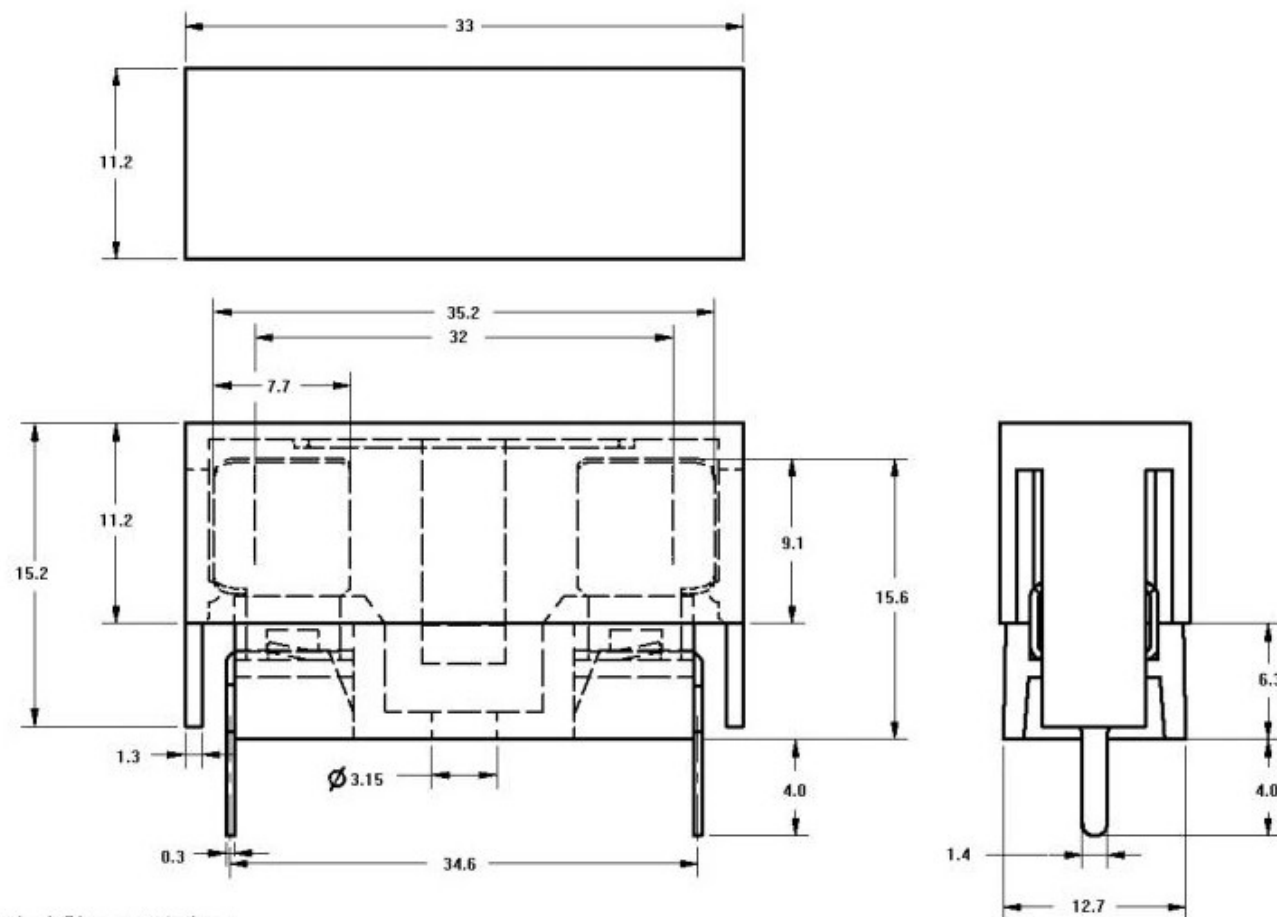

Electrical Characteristics:

Nominal Current/Voltage: 10A 250V

Operating Power:1.6W

Contact Resistance: <5mΩ

Insulation Resistance:>100MΩ

Dielectric Strength:>3000Vac/60sec.

Material:Insulation Body:Nylon+Glass fiber UL 94 V1

Contact Fuse Clip:CuZn37 Tin Plated

Solderability: 235°C 5sec.(solder bath) (IEC 60068-2-20)

350°C 2~3sec(solder iron)

Soldering heat resistance: 260°C 5 sec.(solder bath)(IEC 60068-2-20)

350°C 10 sec.(solder iron)

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MM
TOLERANCE
DECIMALS ANGULAR
X ± 0.5 ± 2°
XX ± 0.2
DO NOT SCALE DRAWING



P/N

REV

A

CUSTOMER NO.

DRAWN BY

CHECKED BY

APPROVED BY

DATE 2007/11/17

SCALE

DONGGUAN TIANRUI ELECTRONIC CO., LTD.

TITLE

6.35*32mm Fuse
Block with cover

PART NO.

UY-BF016

DRAWING NO.